




Appendix A for Emission and Immunity test results

Product Name: myFirst Fone R1s、myFirst Fone R1c

Test Model: KW1305

A.1 Line Conducted Emission

Test Model	KW1305	Test Mode	TM1
Environmental Conditions	23.5℃, 53.6% RH	Test Engineer	Taylor Hu
Pol.	Line	Test Voltage	AC 230V/50Hz

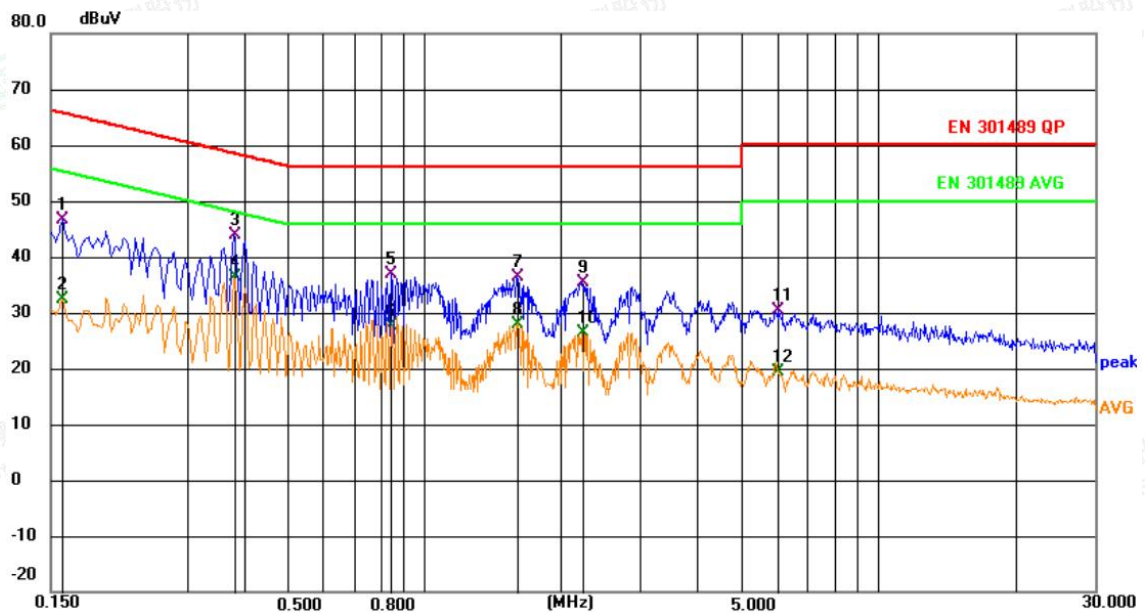

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1590	26.35	20.21	46.56	65.52	-18.96	QP	
2		0.1590	12.16	20.21	32.37	55.52	-23.15	AVG	
3		0.3796	23.52	20.25	43.77	58.29	-14.52	QP	
4	*	0.3796	16.24	20.25	36.49	48.29	-11.80	AVG	
5		0.8475	16.68	20.09	36.77	56.00	-19.23	QP	
6		0.8475	7.53	20.09	27.62	46.00	-18.38	AVG	
7		1.5990	16.11	20.17	36.28	56.00	-19.72	QP	
8		1.5990	7.68	20.17	27.85	46.00	-18.15	AVG	
9		2.2335	15.04	20.23	35.27	56.00	-20.73	QP	
10		2.2335	6.07	20.23	26.30	46.00	-19.70	AVG	
11		6.0316	10.33	19.96	30.29	60.00	-29.71	QP	
12		6.0316	-0.68	19.96	19.28	50.00	-30.72	AVG	



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	KW1305	Test Mode	TM1
Environmental Conditions	23.5°C, 53.6% RH	Test Engineer	Taylor Hu
Pol.	Neutral	Test Voltage	AC 230V/50Hz

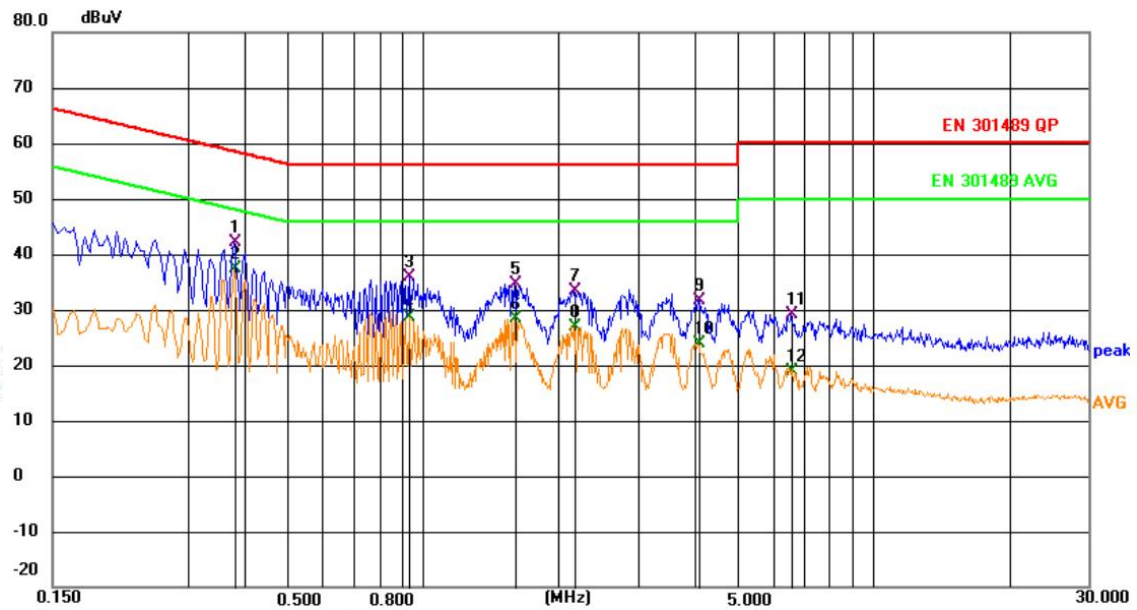

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3796	22.13	20.04	42.17	58.29	-16.12	QP	
2	*	0.3796	17.28	20.04	37.32	48.29	-10.97	AVG	
3		0.9330	15.73	20.15	35.88	56.00	-20.12	QP	
4		0.9330	8.37	20.15	28.52	46.00	-17.48	AVG	
5		1.5990	14.37	20.18	34.55	56.00	-21.45	QP	
6		1.5990	8.28	20.18	28.46	46.00	-17.54	AVG	
7		2.1660	13.06	20.24	33.30	56.00	-22.70	QP	
8		2.1660	6.56	20.24	26.80	46.00	-19.20	AVG	
9		4.0741	11.64	20.02	31.66	56.00	-24.34	QP	
10		4.0741	3.78	20.02	23.80	46.00	-22.20	AVG	
11		6.5851	8.85	20.35	29.20	60.00	-30.80	QP	
12		6.5851	-1.39	20.35	18.96	50.00	-31.04	AVG	

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.

Margin= Reading Level + Correct Factor – Limit

Correct Factor=Lisn Factor+Cable Factor



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.3 Radiated Disturbance

Test Model	KW1305	Test Mode	TM1
Environmental Conditions	23.8°C, 52.1% RH	Test Engineer	Taylor Hu
Pol.	Horizontal	Detector Function	Quasi-peak
Distance	3m	Test Voltage	AC 230V/50Hz

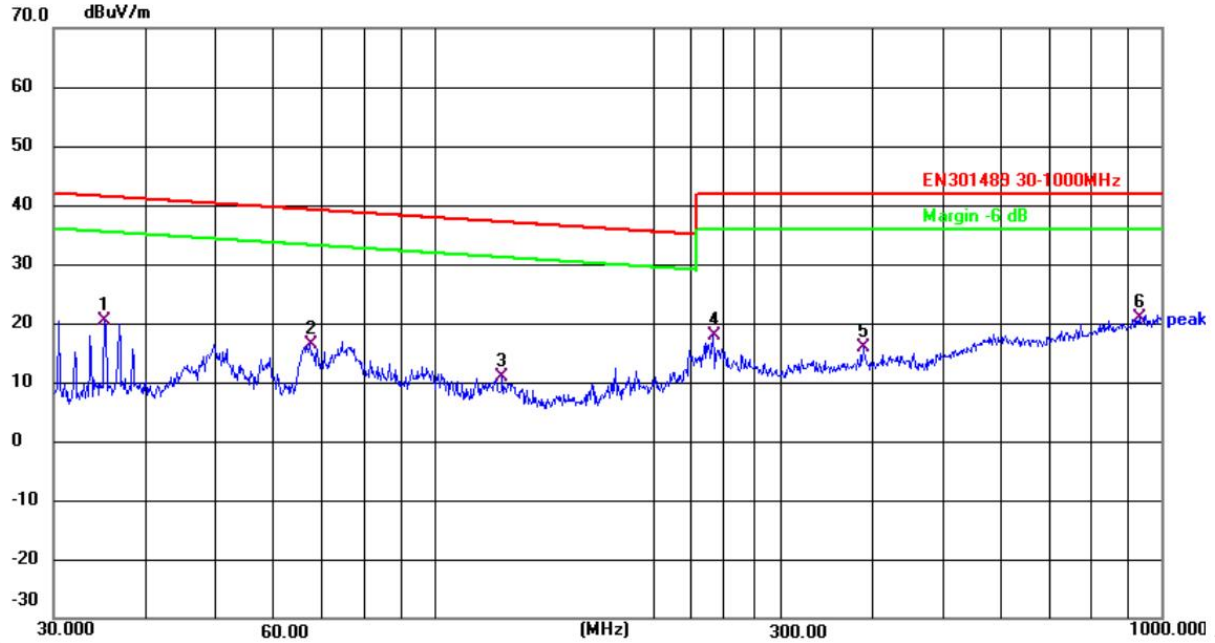

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.2511	38.13	-17.79	20.34	41.45	-21.11	QP
2	67.4382	35.71	-19.32	16.39	39.22	-22.83	QP
3	124.1329	30.97	-20.21	10.76	37.12	-26.36	QP
4	241.6763	33.90	-15.99	17.91	42.00	-24.09	QP
5	389.3548	30.36	-14.55	15.81	42.00	-26.19	QP
6	932.2715	28.75	-7.91	20.84	42.00	-21.16	QP



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	KW1305	Test Mode	TM1
Environmental Conditions	23.8°C, 52.1% RH	Test Engineer	Taylor Hu
Pol.	Vertical	Detector Function	Quasi-peak
Distance	3m	Test Voltage	AC 230V/50Hz

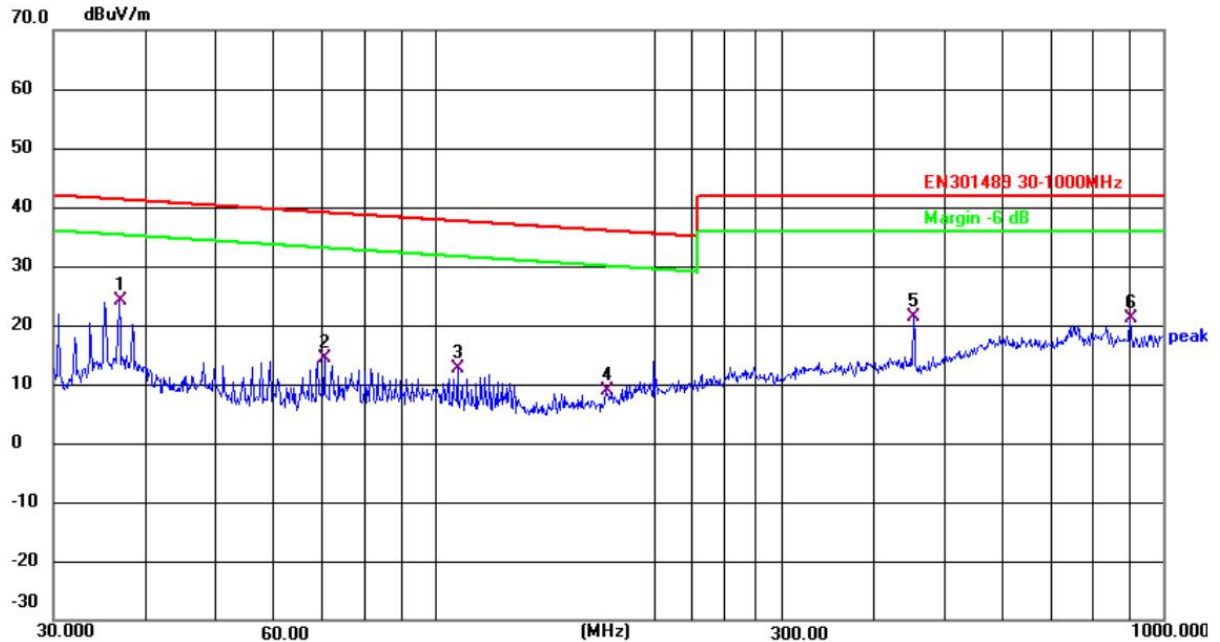


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.8953	41.76	-17.69	24.07	41.29	-17.22	QP
2	70.5835	33.76	-19.49	14.27	39.06	-24.79	QP
3	107.5100	31.54	-18.84	12.70	37.61	-24.91	QP
4	171.9946	28.27	-19.36	8.91	36.00	-27.09	QP
5	454.3100	35.73	-14.46	21.27	42.00	-20.73	QP
6	900.1474	29.39	-8.30	21.09	42.00	-20.91	QP

Note: Margin= Reading Level + Correct Factor – Limit
Correct Factor=Antenna Factor+Cable Factor – Pre-Amplifier Factor





Test Model	KW1305	Test Mode	TM1(Above 1GHz)
Environmental Conditions	23.9℃, 52.1% RH	Test Engineer	Taylor Hu
Pol.	Horizontal	Detector Function	Peak + AV
Distance	3m	Test Voltage	AC 230V/50Hz

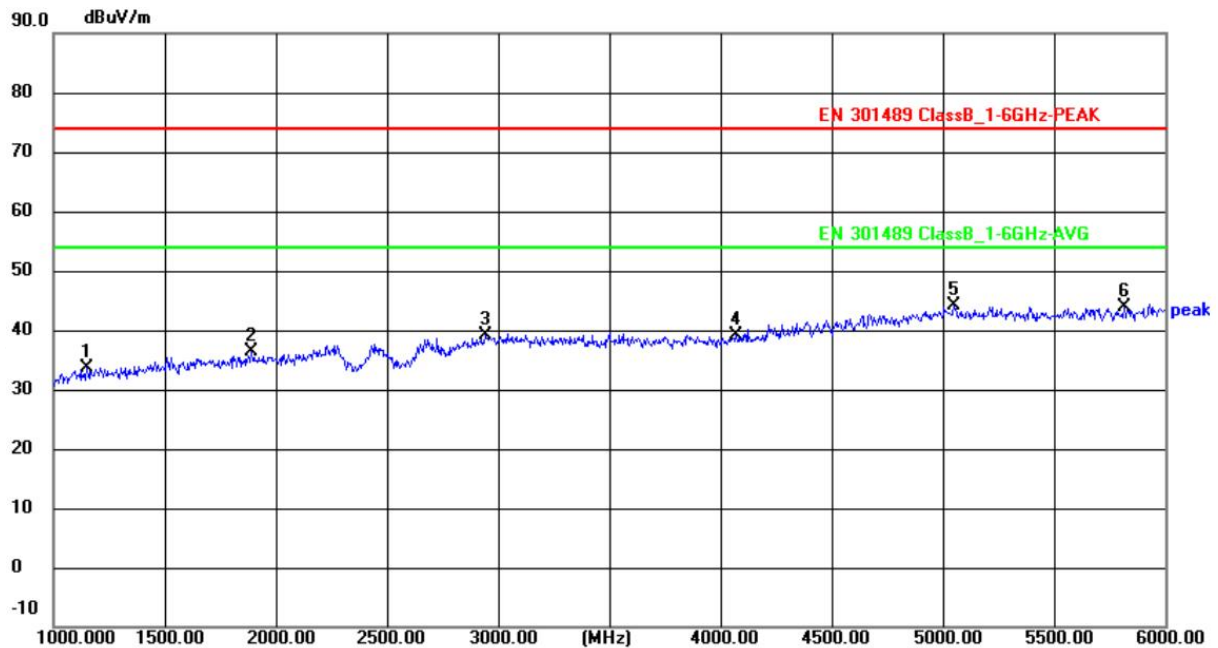

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1150.000	48.80	-15.27	33.53	74.00	-40.47	peak
2	1890.000	49.94	-13.68	36.26	74.00	-37.74	peak
3	2940.000	48.89	-9.80	39.09	74.00	-34.91	peak
4	4070.000	47.27	-8.26	39.01	74.00	-34.99	peak
5	5050.000	48.20	-4.03	44.17	74.00	-29.83	peak
6	5815.000	47.34	-3.52	43.82	74.00	-30.18	peak



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Model	KW1305	Test Mode	TM1(Above 1GHz)
Environmental Conditions	23.9°C, 52.1% RH	Test Engineer	Taylor Hu
Pol.	Vertical	Detector Function	Peak + AV
Distance	3m	Test Voltage	AC 230V/50Hz

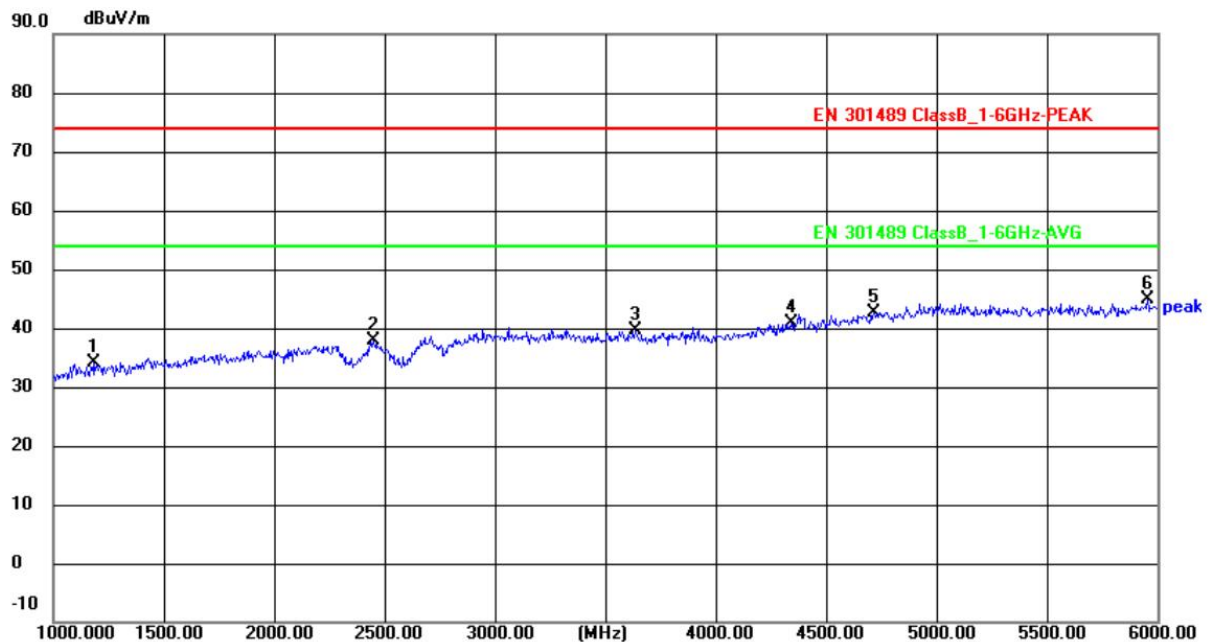

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1180.000	49.45	-15.24	34.21	74.00	-39.79	peak
2	2450.000	49.36	-11.53	37.83	74.00	-36.17	peak
3	3635.000	48.82	-9.18	39.64	74.00	-34.36	peak
4	4340.000	48.10	-7.21	40.89	74.00	-33.11	peak
5	4715.000	48.24	-5.52	42.72	74.00	-31.28	peak
6	5955.000	48.41	-3.64	44.77	74.00	-29.23	peak

Note:

- Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
- Measurements above show only up to 6 maximum emissions noted.
- Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- Factor = Antenna Factor + Cable Loss + Amplifier Factor
Emission Level = Reading level + Factor
Margin = Emission Level - Limit





A.4 Harmonic Current Emissions

Because power of EUT less than 75W, according to standard EN 61000-3-2, Harmonic current unnecessary to test.


A.5 Voltage Fluctuation and Flicker

Test Model	KW1305	Test Mode	TM1
Test Engineer	Taylor Hu	Test Voltage	AC 230V/50Hz
Environmental Conditions	23.3°C, 55.5% RH		

Customer : xxx

Result : Pass

Pst and Limit

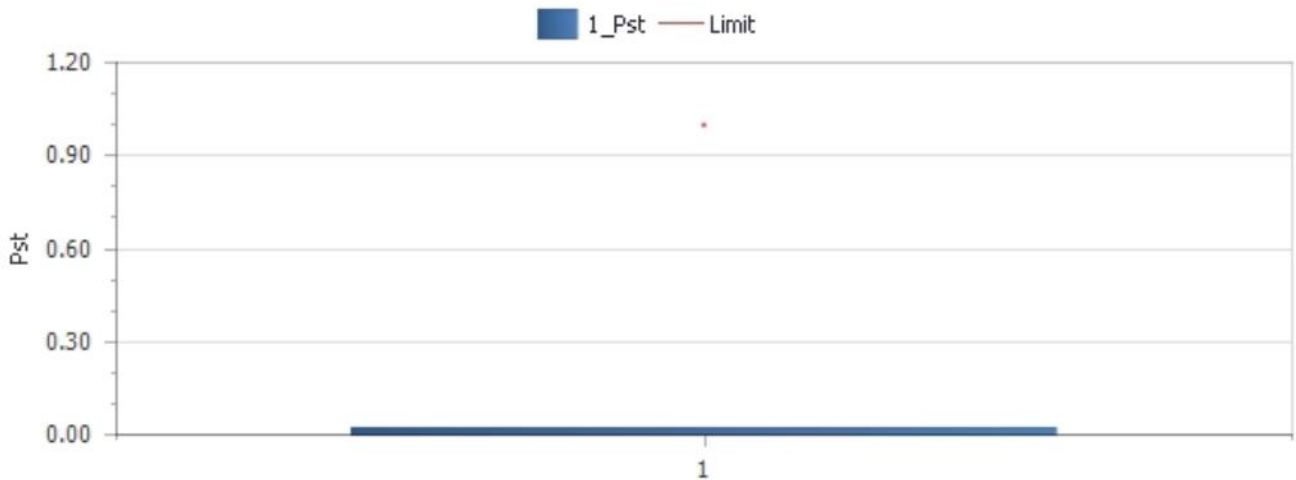

Relevant Parameter and Judgement During Test Period

Vrms at the end of test (V)	230.01			
Error Max (%)		Test Limit (%)		
T-max (ms)	0.00	Test Limit (ms)	500	Pass
dc (%)	0.00	Test Limit (%)	3.30	Pass
dmax (%)	0.00	Test Limit (%)	4.00	Pass
Pst	0.024	Test Limit	1.000	Pass

Elem1 Test Parameters

Num	dc (%)	dmax (%)	Tmax (ms)	Pst
1	0.00	0.00	0.00	0.024



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**A.6 RF Electromagnetic Field (80 MHz - 6000 MHz)**

Test Model	KW1305	Test Engineer	Taylor Hu
Environmental Conditions	23.2°C, 52.4% RH	Test Voltage	AC 230V/50Hz

TM1-TM18 Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
GSM/GPRS/EGPRS 900 MHz, Traffic	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back, Top, Bottom	Pass
GSM/GPRS/EGPRS 900 MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
DCS/GPRS/EGPRS 1800 MHz, Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
DCS/GPRS/EGPRS 1800 MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
WCDMA/ HSDPA/HSUPA Band I 2100 MHz, Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
WCDMA HSDPA/HSUPA Band I 2100MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
WCDMA/ HSDPA/HSUPA Band VIII 900MHz, Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
WCDMA HSDPA/HSUPA Band VIII 900MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 1 Traffic	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back, Top, Bottom	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



					Left, Back, Top, Bottom	
E-UTRA Band 1 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 3 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 3 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 7 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 7 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 8 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 8 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 20 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 20 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 28 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



					Left, Back, Top, Bottom	
E-UTRA Band 28 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 38 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back, Top, Bottom	Pass
E-UTRA Band 38 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass

TM20-TM21 Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back, Top, Bottom	Pass

TM22-TM23 Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	CR	Front, Right, Left, Back, Top, Bottom	Pass
	Vertical	80MHz;104MHz;136MHz;165MHz;200MHz;260MHz;330MHz;430MHz;560MHz;715MHz ± 1MHz;920MHz ± 1MHz (spot test)	3	CR	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80MHz;104MHz;136MHz;165MHz;200MHz;260MHz;330MHz;430MHz;560MHz;715MHz ± 1MHz;920MHz ± 1MHz (spot test)	3	CR	Front, Right, Left, Back, Top, Bottom	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**TM24-TM26 Test Result:**

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back, Top, Bottom	Pass

Special conditions for EMC immunity tests

EUT Operating Mode		Polarity	Conclusion
GSM 900	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	RX Quality	H	Pass
		V	Pass
DCS 1800	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	RX Quality	H	Pass
		V	Pass
WCDMA HSDPA/HSUPA Band I 2100MHz	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	BER	H	Pass
		V	Pass
WCDMA HSDPA/HSUPA Band VIII 900MHz	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	BER	H	Pass
		V	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Plots for GSM 900 (80MHz ~ 1000MHz)

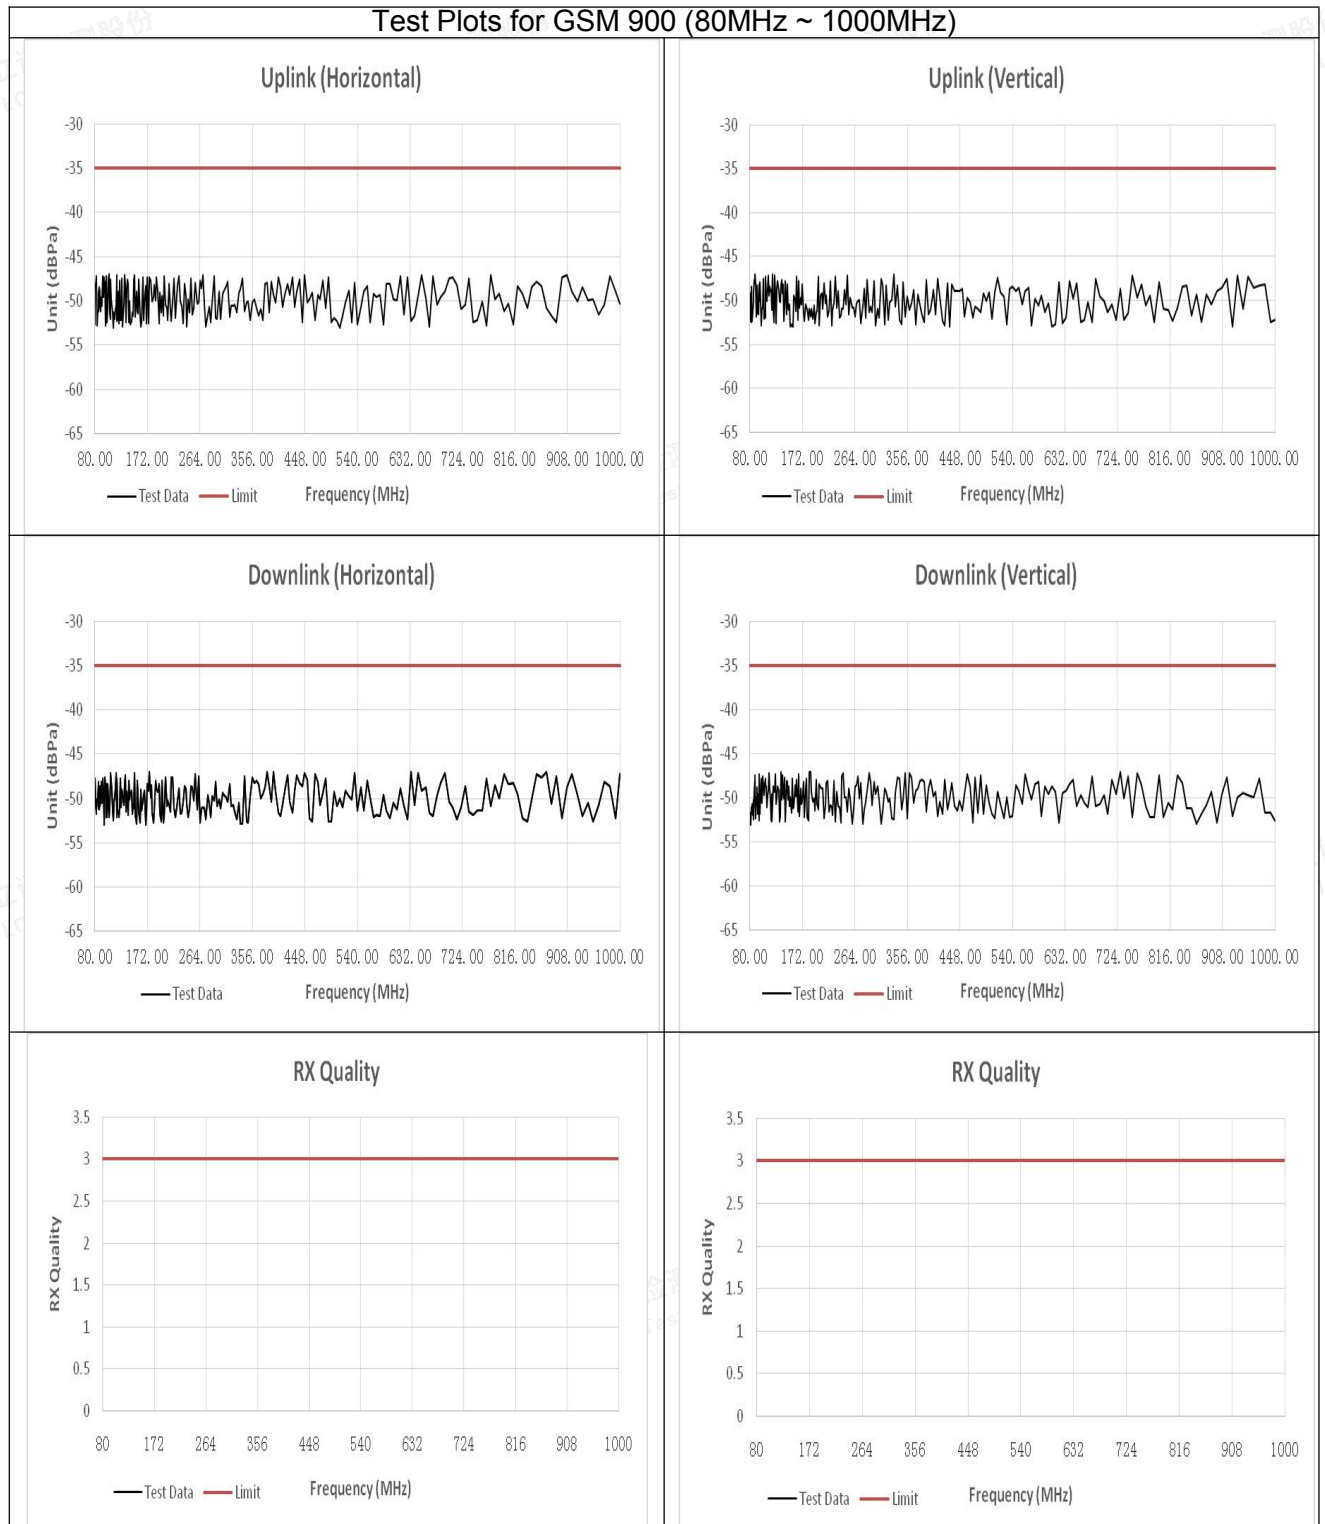


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

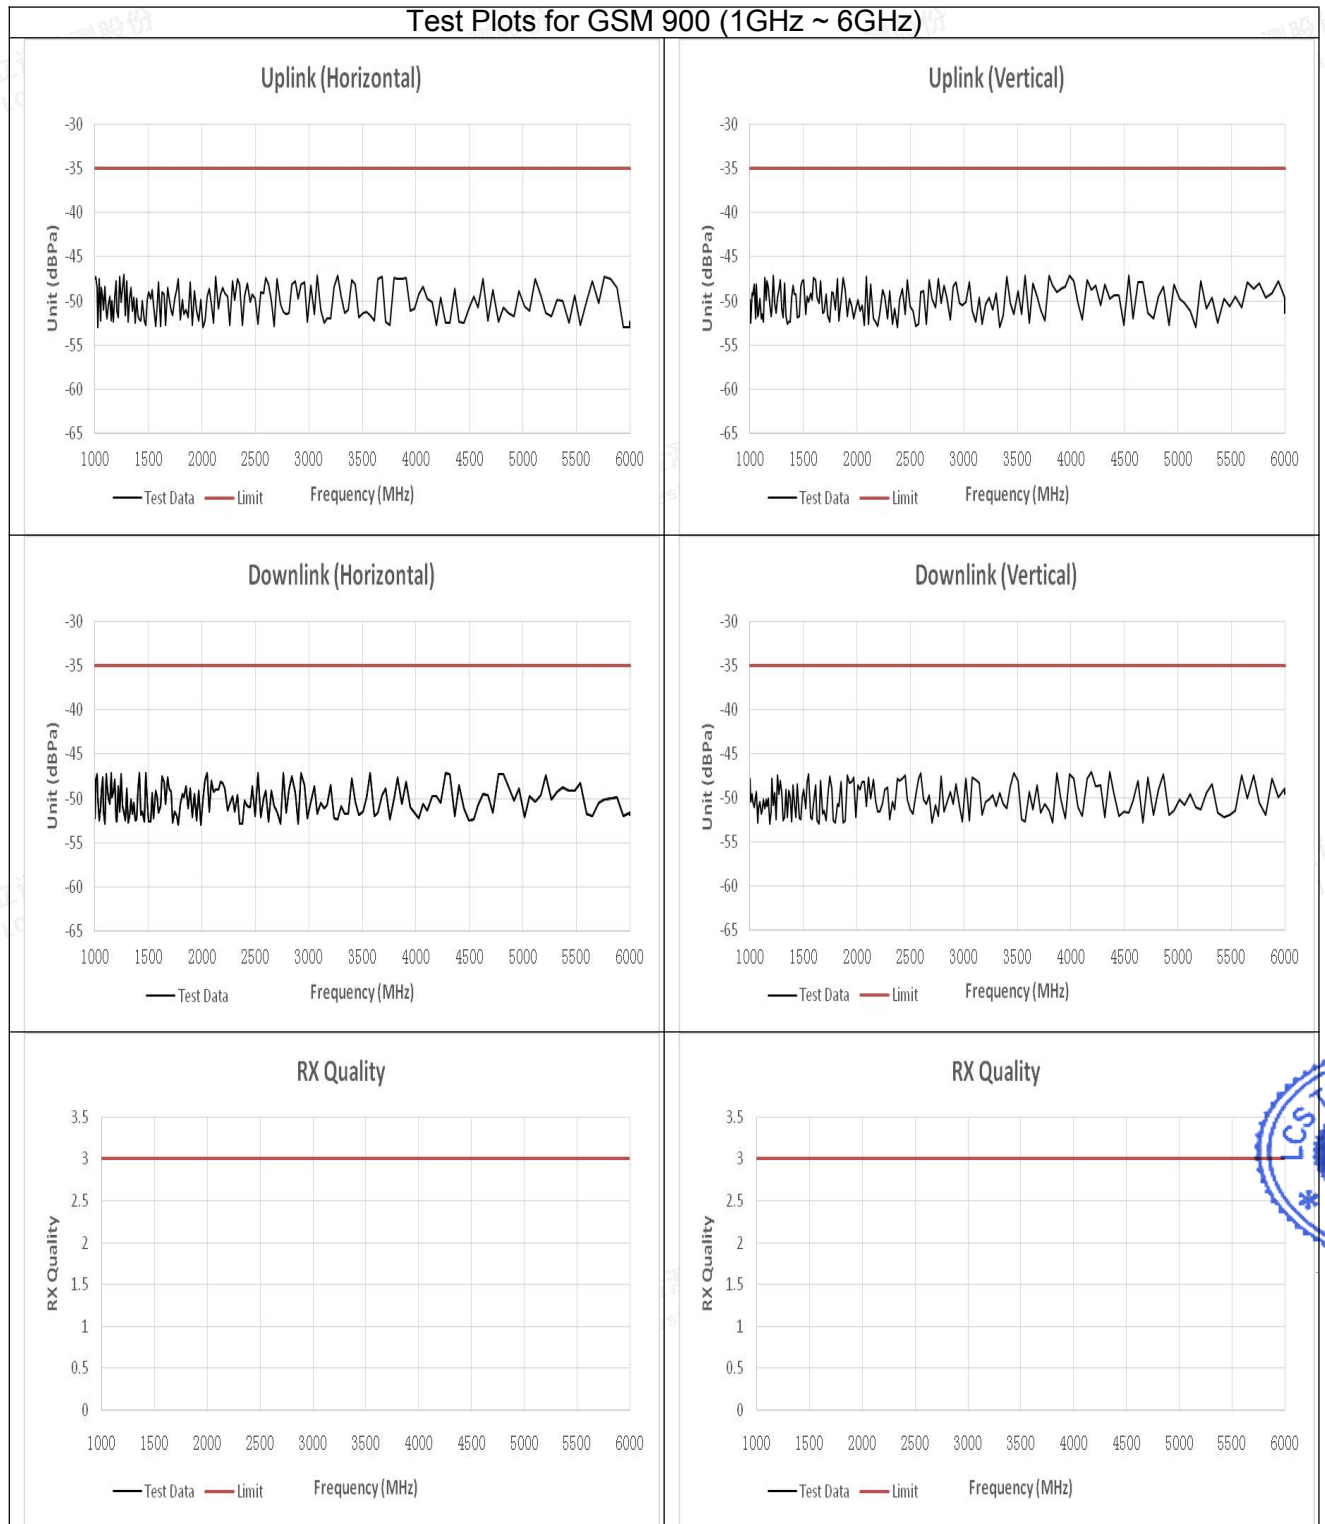


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

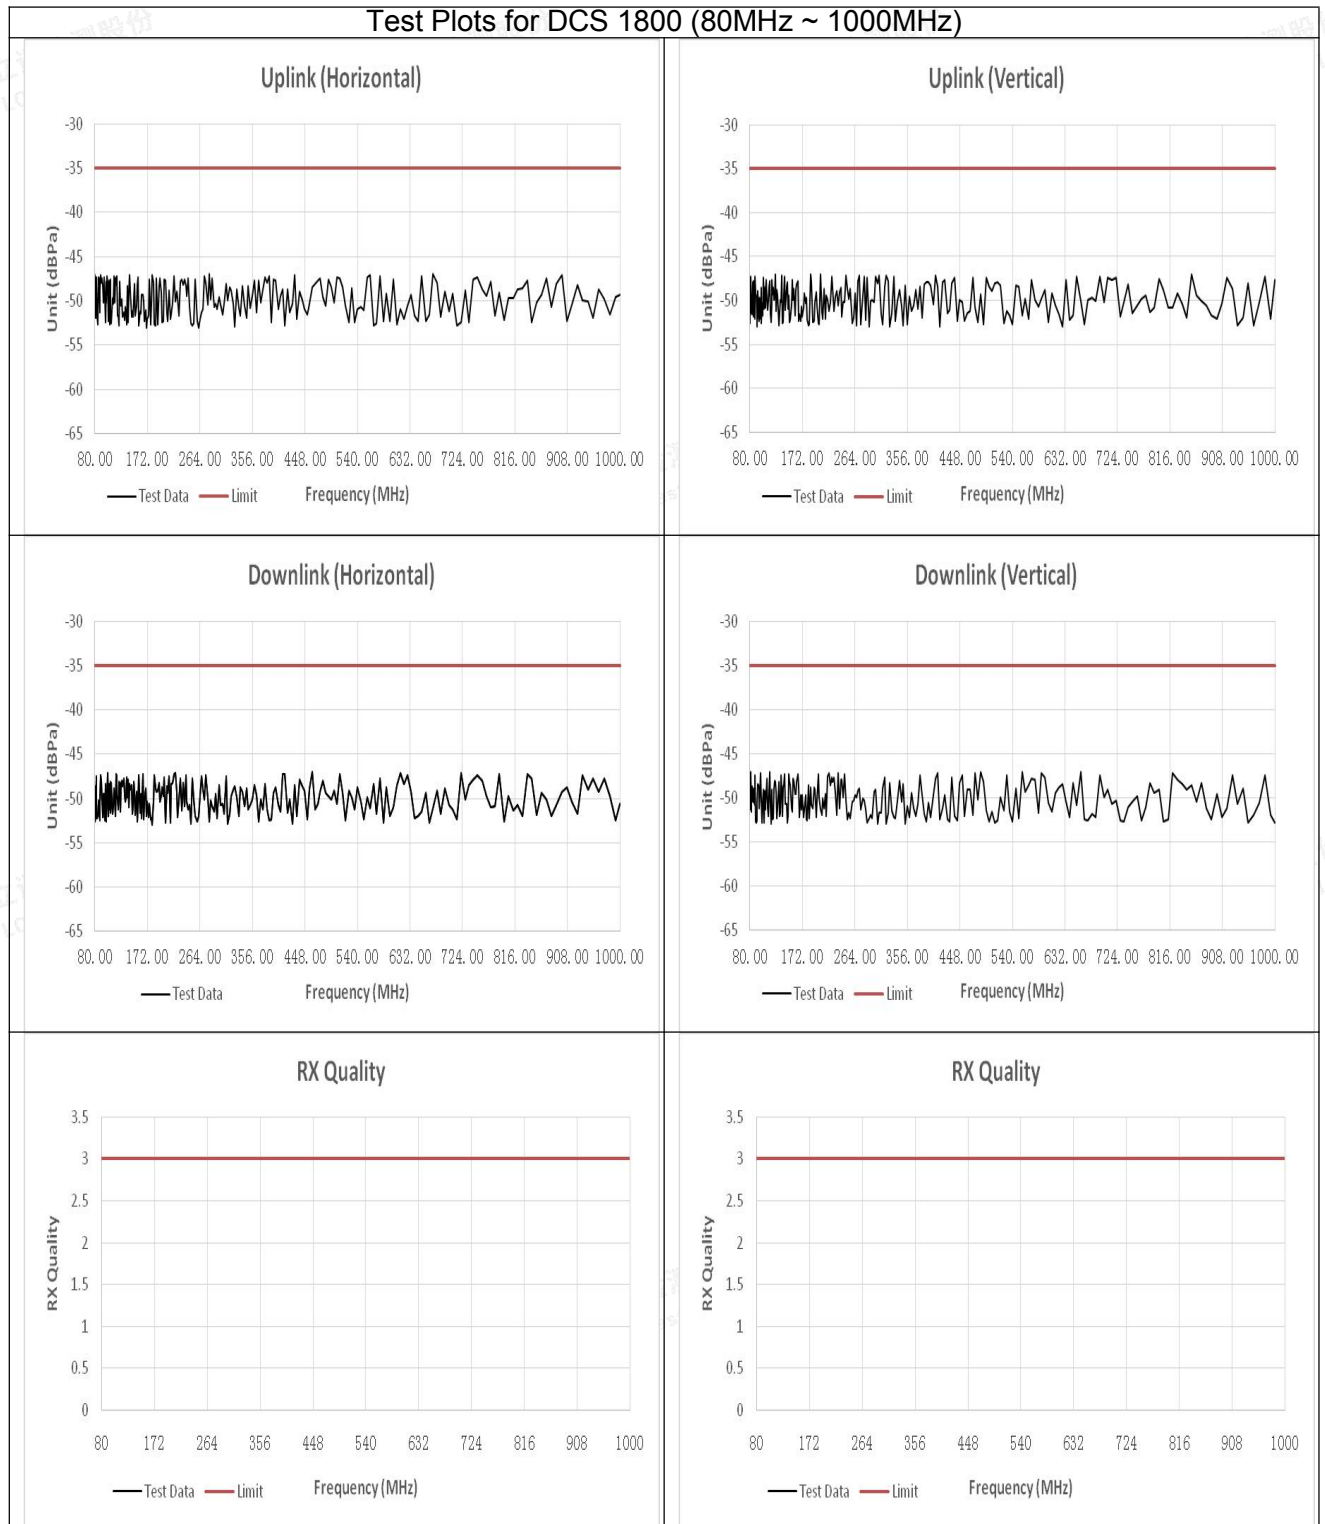


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

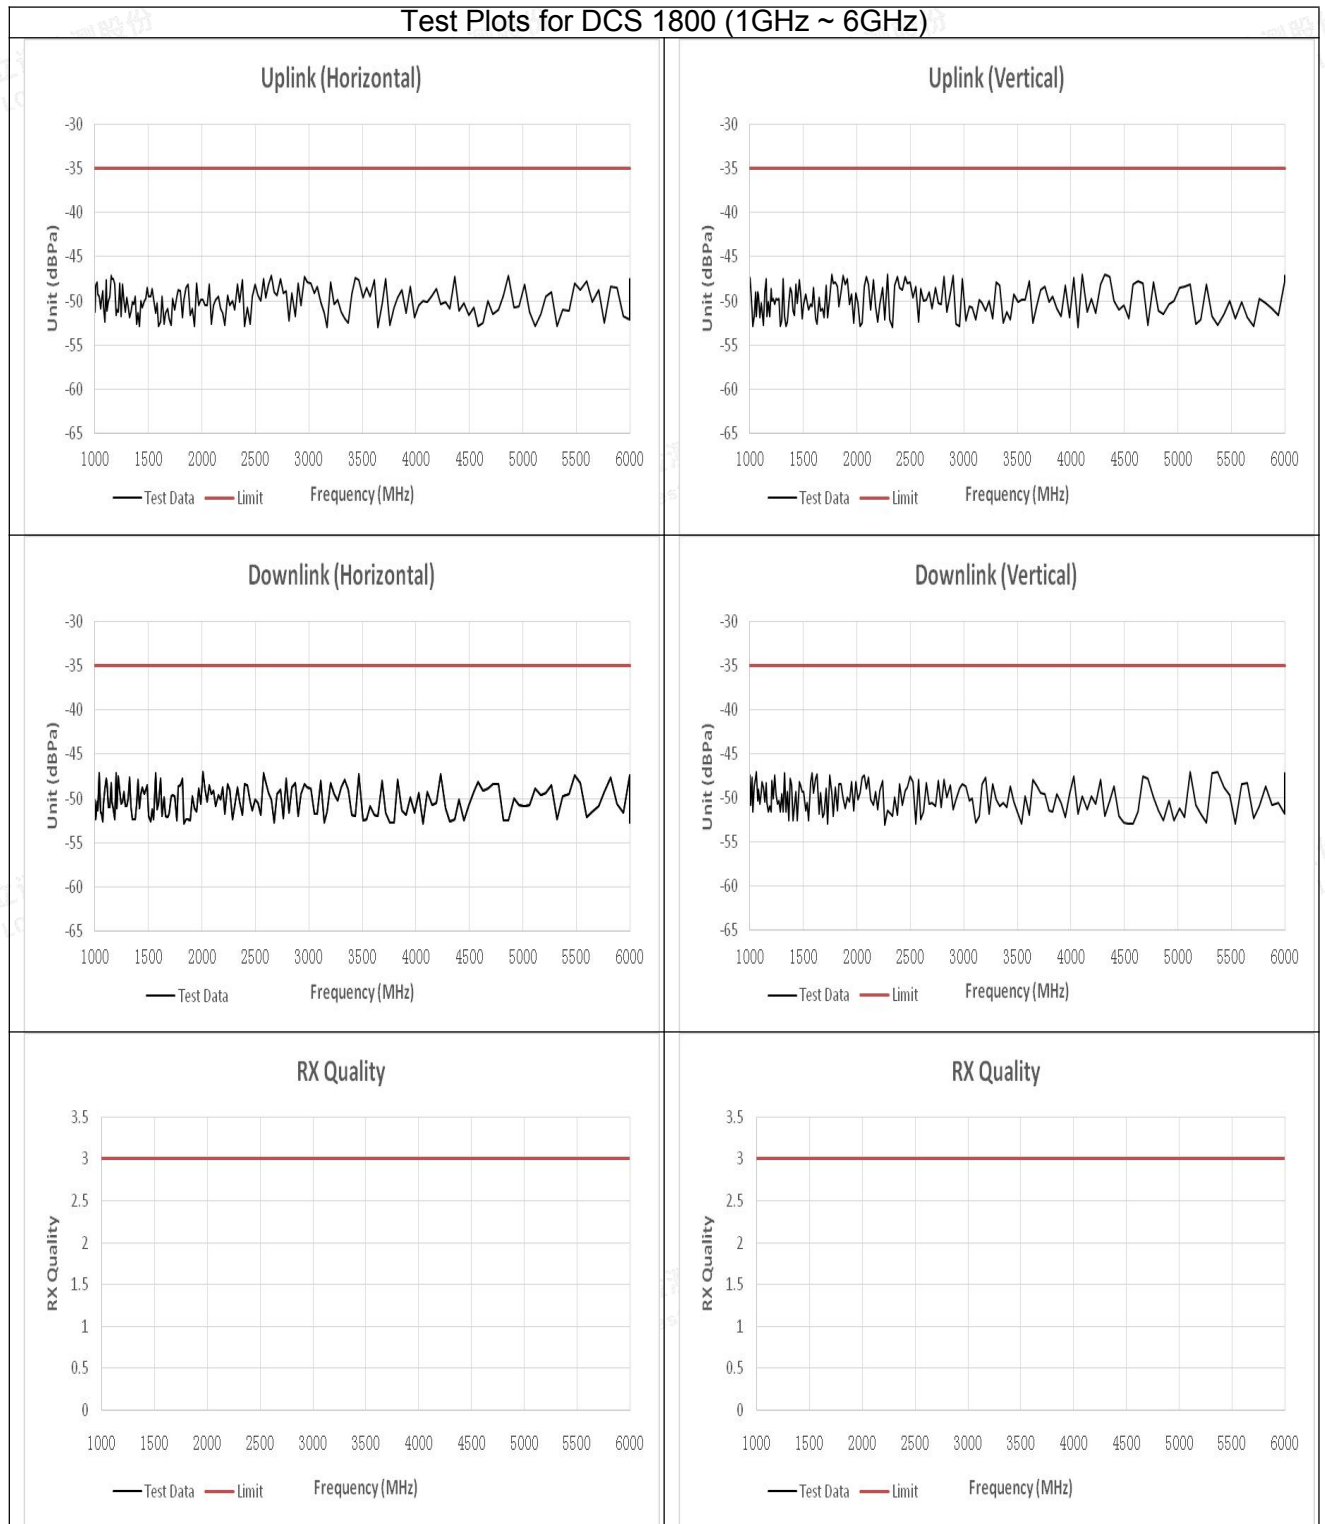


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

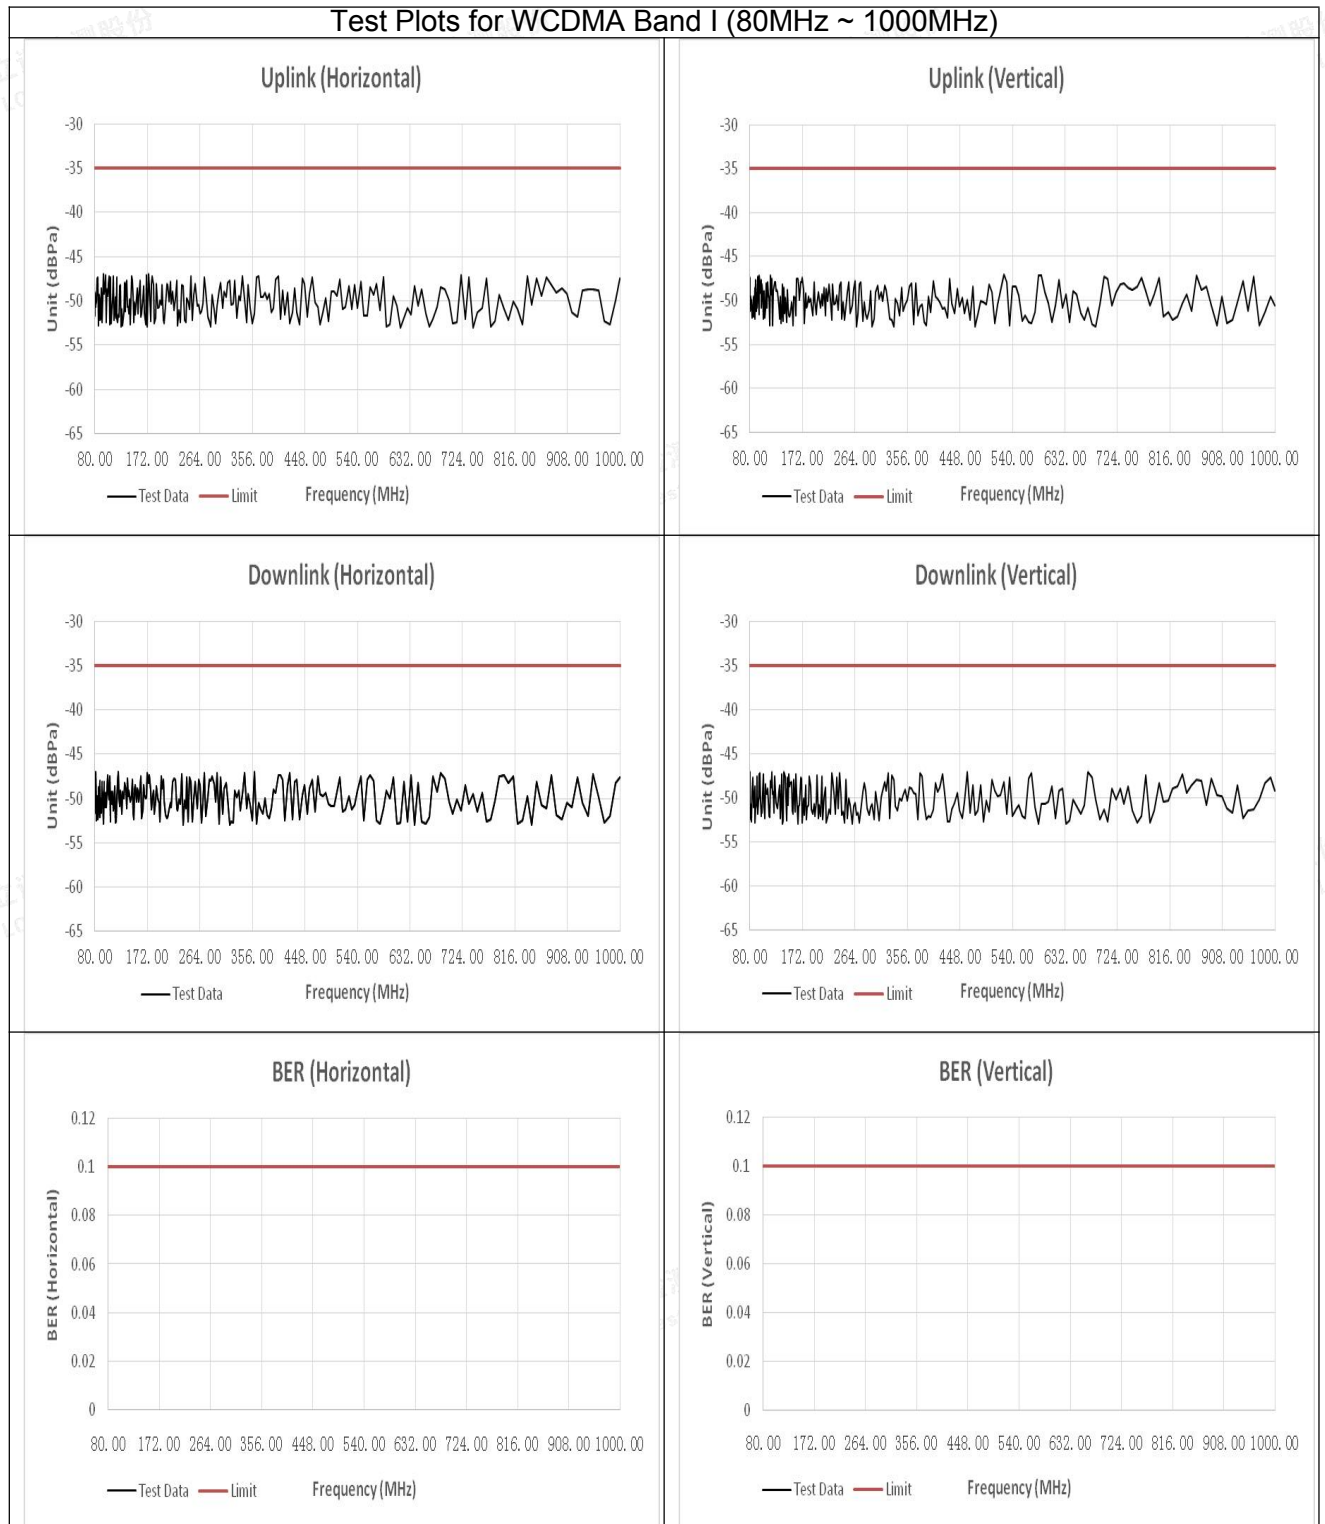


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

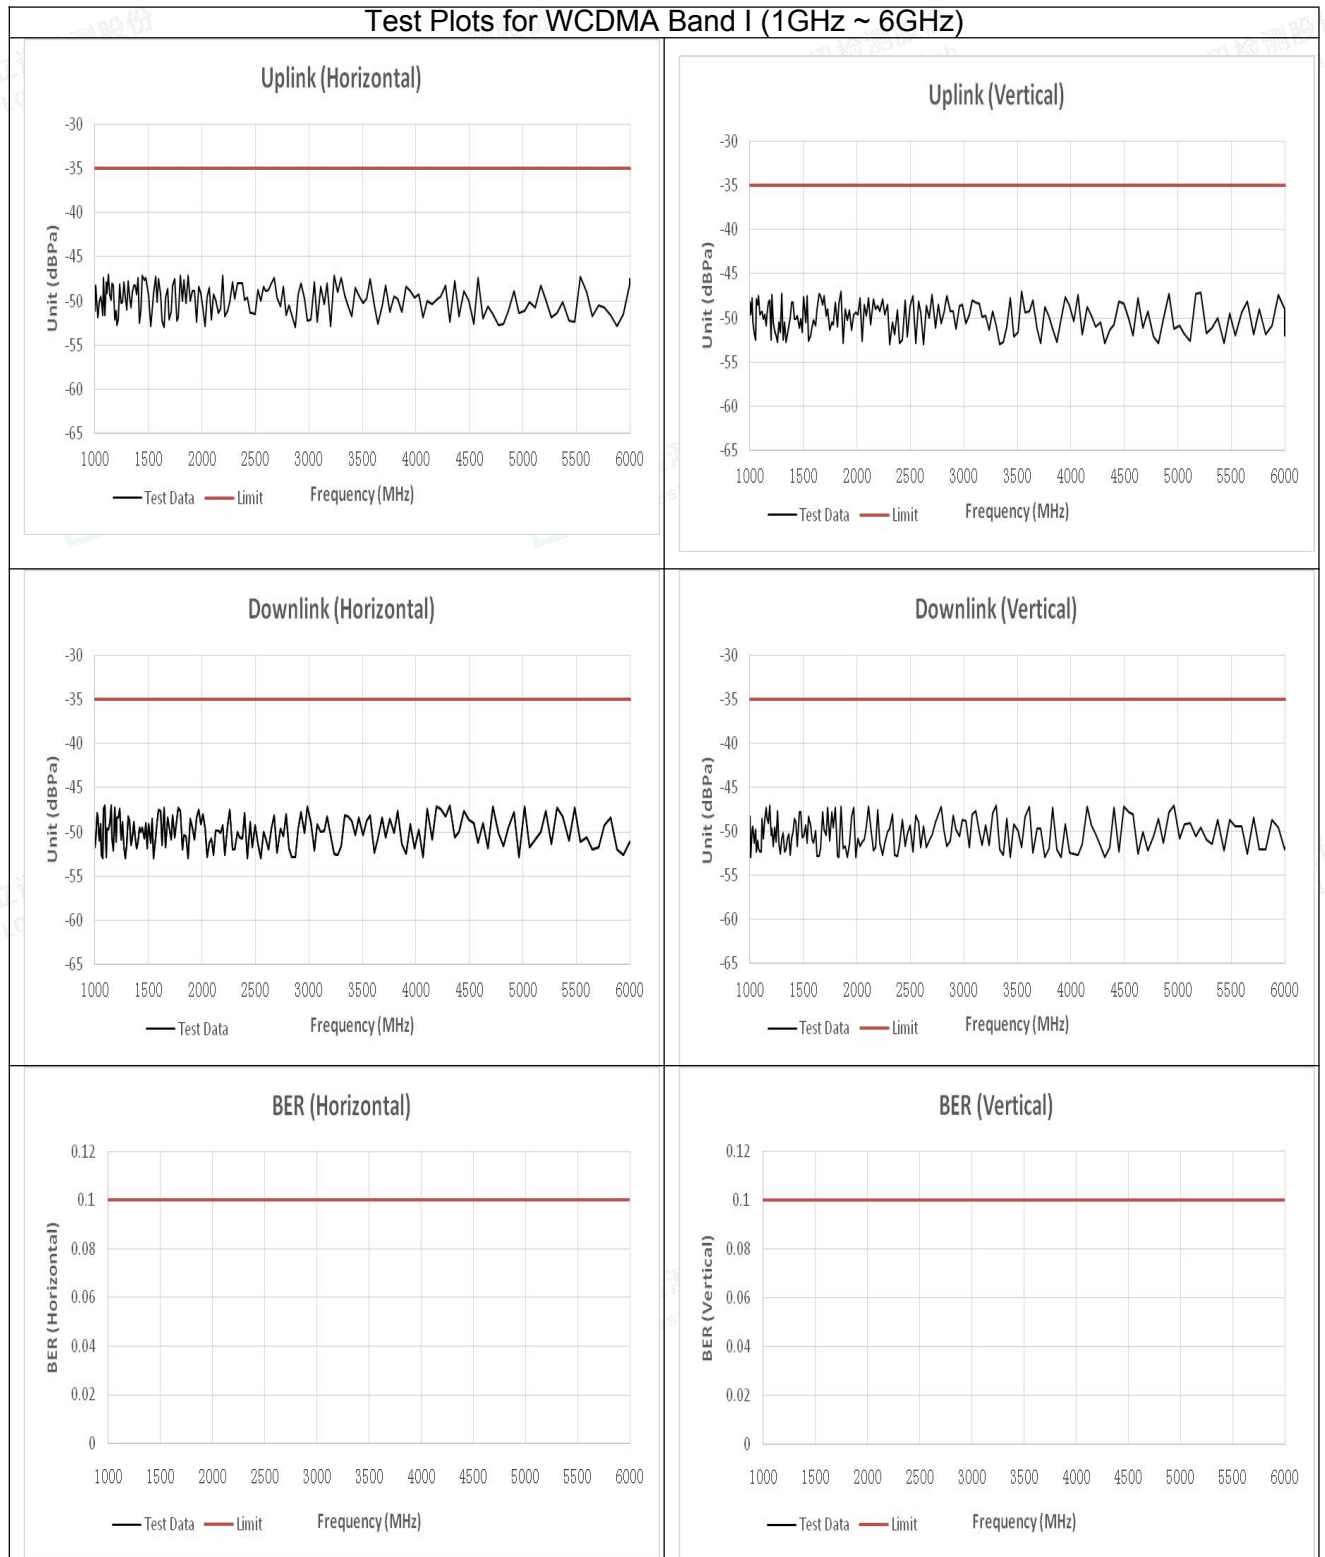

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Test Plots for WCDMA Band VIII (80MHz ~ 1000MHz)

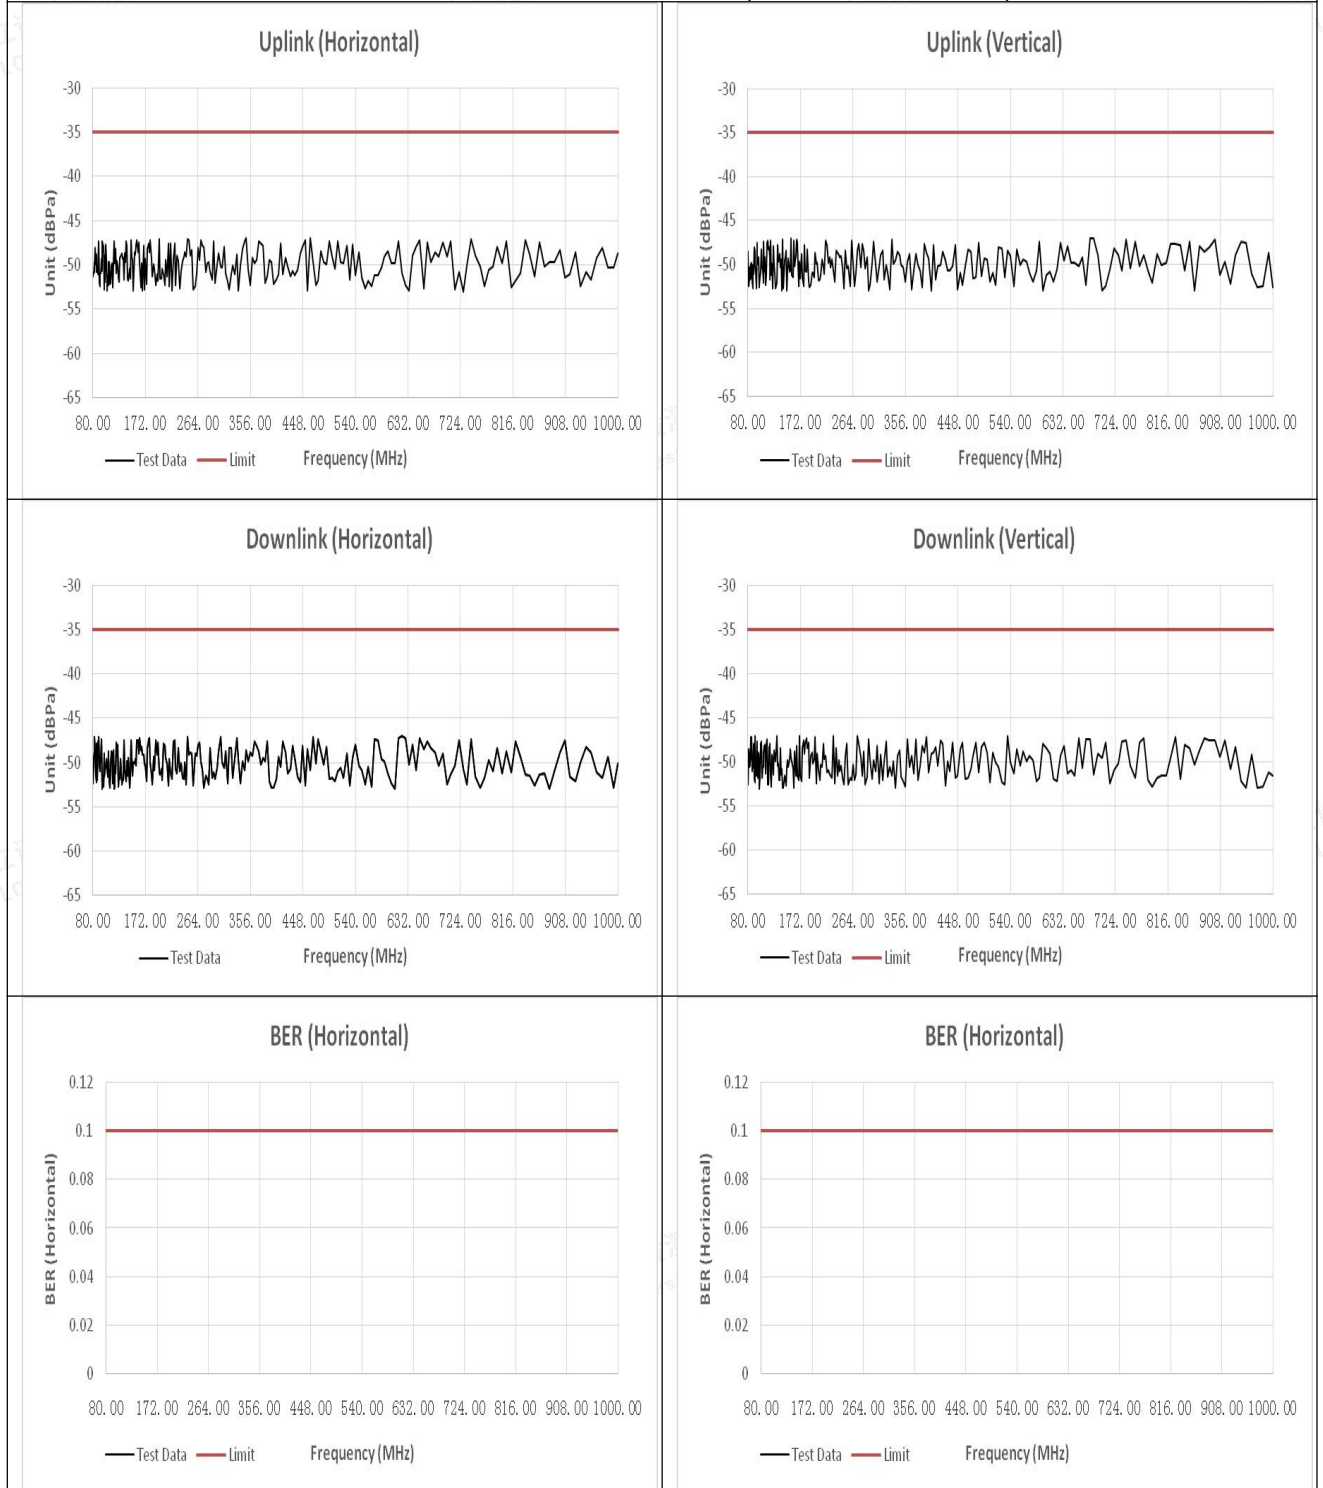


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

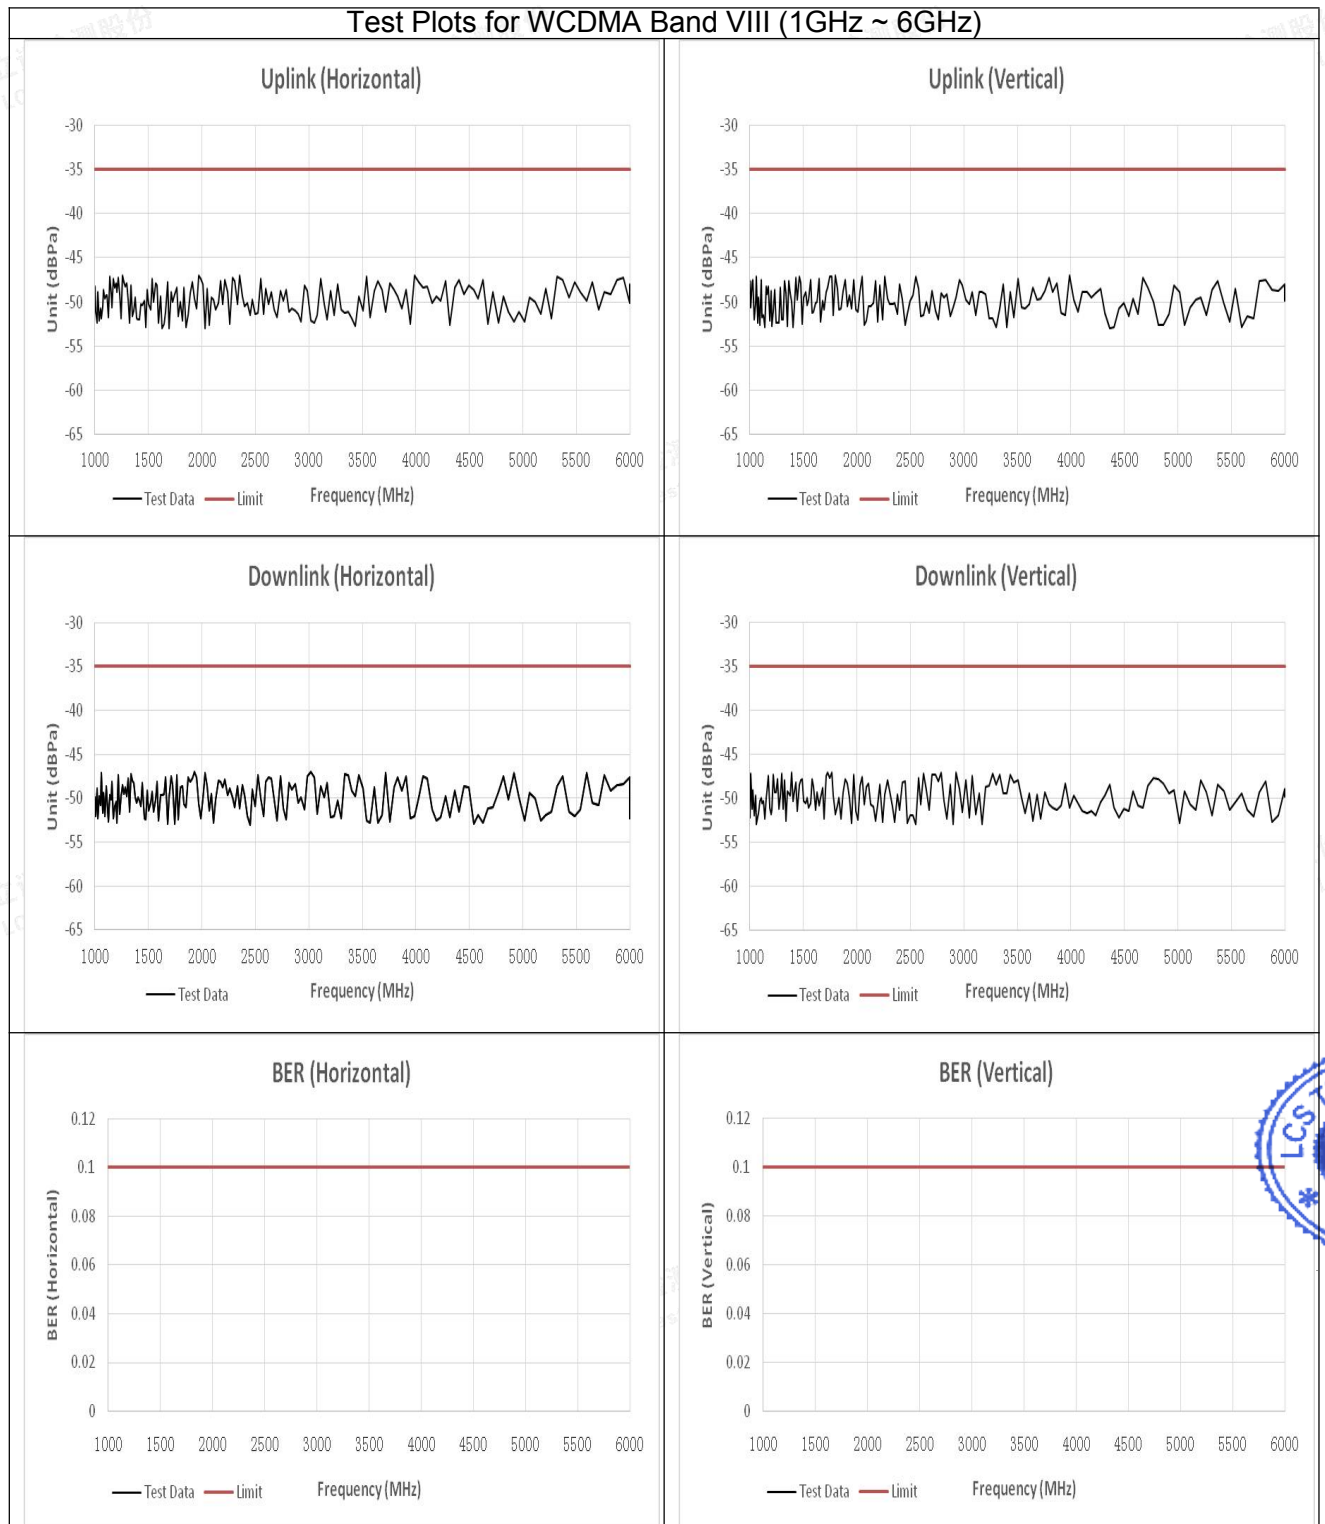

Note: The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

During the test, the Maximum Bit Error Ratio was less than 0.001

During the test, the Maximum Block Error Ratio was less than 0.01

For E-UTRA Band 1/3/7/8/20/28/38 (In the data transfer mode), the throughput is $\geq 95\%$ of the maximum throughput of the reference measurement channel as specified in annex C in TS 136 101 [13] with parameters specified in tables 7.3.1-1 and 7.3.1-2 in TS 136 101 [13] during the test sequence.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**A.7 Electrostatic Discharge****Electrostatic Discharge Test Results**

Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	myFirst Tech Asia Pte. Ltd.		
EUT	myFirst Fone R1s、myFirst Fone R1c	Temperature	22.2℃
M/N	KW1305	Humidity	52.5%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM26	Test Engineer	Taylor Hu

TEST RESULT OF TM1-TM21

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass

TEST RESULT OF TM22-TM23

Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TR	Pass

TEST RESULT OF TM24-TM26

Test Voltage	Coupling	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	Pass
±2KV, ±4kV, ±8kV	Air Discharge	Pass
±2KV, ±4kV	Indirect Discharge HCP	Pass
±2KV, ±4kV	Indirect Discharge VCP	Pass

Note: The EUT performance complied with performance criteria for TT&TR to MS Function and there is no any degradation of performance and function.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**A.8 Electrical Fast Transient Immunity****Electrical Fast Transient/Burst Test Results**

Standard	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
Applicant	myFirst Tech Asia Pte. Ltd.		
EUT	myFirst Fone R1s、myFirst Fone R1c	Temperature	23.4℃
M/N	KW1305	Humidity	52.8%
Test Mode	TM1-TM26	Criterion	B
Test Engineer	Taylor Hu		

TEST RESULT OF TM1-TM21

Line	Test Voltage	Polarity	Observation	Result (Pass/Fail)
L	1KV	+/-	TT, TR	Pass
N	1KV	+/-	TT, TR	Pass
L-N	1KV	+/-	TT, TR	Pass

TEST RESULT OF TM22-TM23

Line	Test Voltage	Polarity	Observation	Result (Pass/Fail)
L	1KV	+/-	TR	Pass
N	1KV	+/-	TR	Pass
L-N	1KV	+/-	TR	Pass

TEST RESULT OF TM24-TM26

Line	Test Voltage	Polarity	Result (Pass/Fail)
L	1KV	+/-	Pass
N	1KV	+/-	Pass
L-N	1KV	+/-	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



A.9 RF Common Mode

Injected Currents Susceptibility Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
Applicant	myFirst Tech Asia Pte. Ltd.		
EUT	myFirst Fone R1s 、 myFirst Fone R1c	Temperature	23.3℃
M/N	KW1305	Humidity	52.4%
Test Mode	TM1-TM26	Criterion	A
Test Engineer	Taylor Hu		

TEST RESULT OF TM1-TM21				
Frequency Range (MHz)	Strength (Unmodulated)	Injected Position	Observation	Result (Pass/Fail)
0.15 ~ 80	3V	AC Mains	CT, CR	Pass
TEST RESULT OF TM22-TM23				
Frequency Range (MHz)	Strength (Unmodulated)	Injected Position	Observation	Result (Pass/Fail)
0.15 ~ 80	3V	AC Mains	CR	Pass
TEST RESULT OF TM24-TM26				
Frequency Range (MHz)	Strength (Unmodulated)	Injected Position	Result (Pass/Fail)	
0.15 ~ 80	3V	AC Mains	Pass	
Remark:				
1. Modulation Signal:1kHz 80% AM				




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

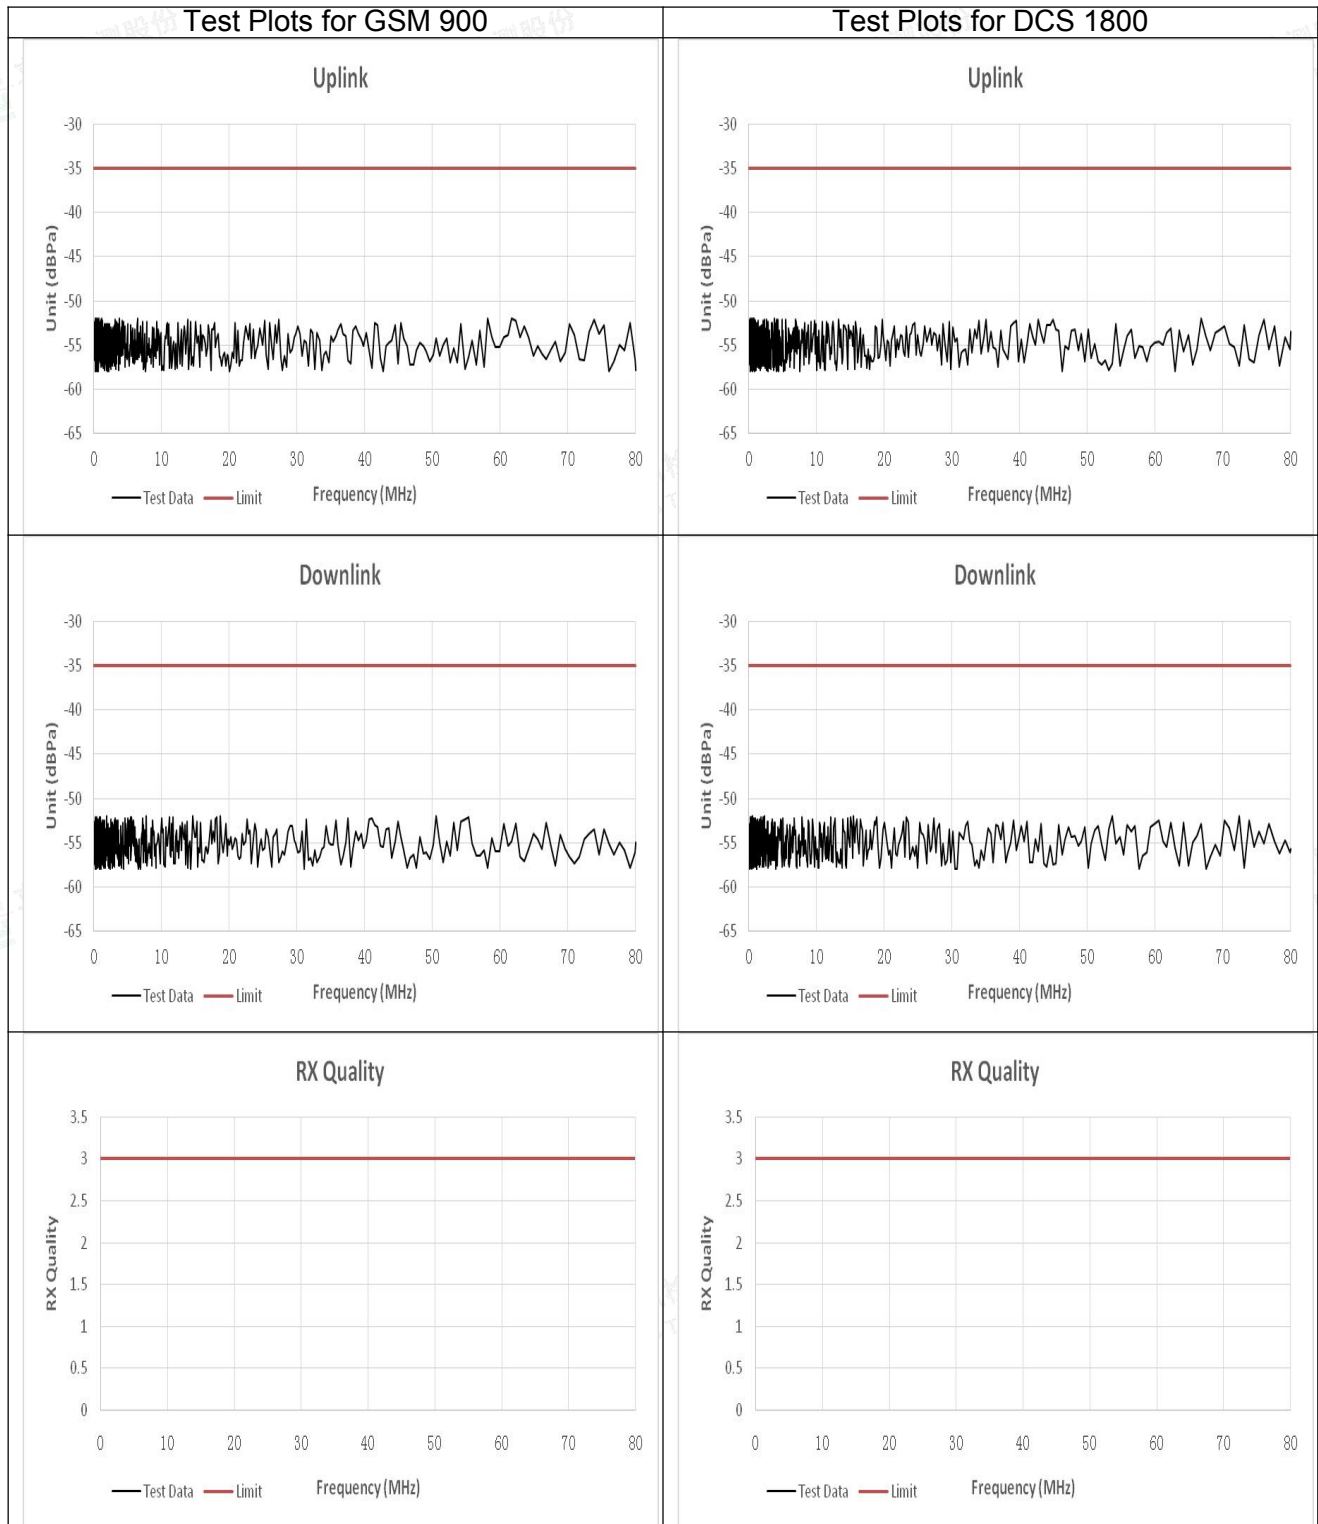


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

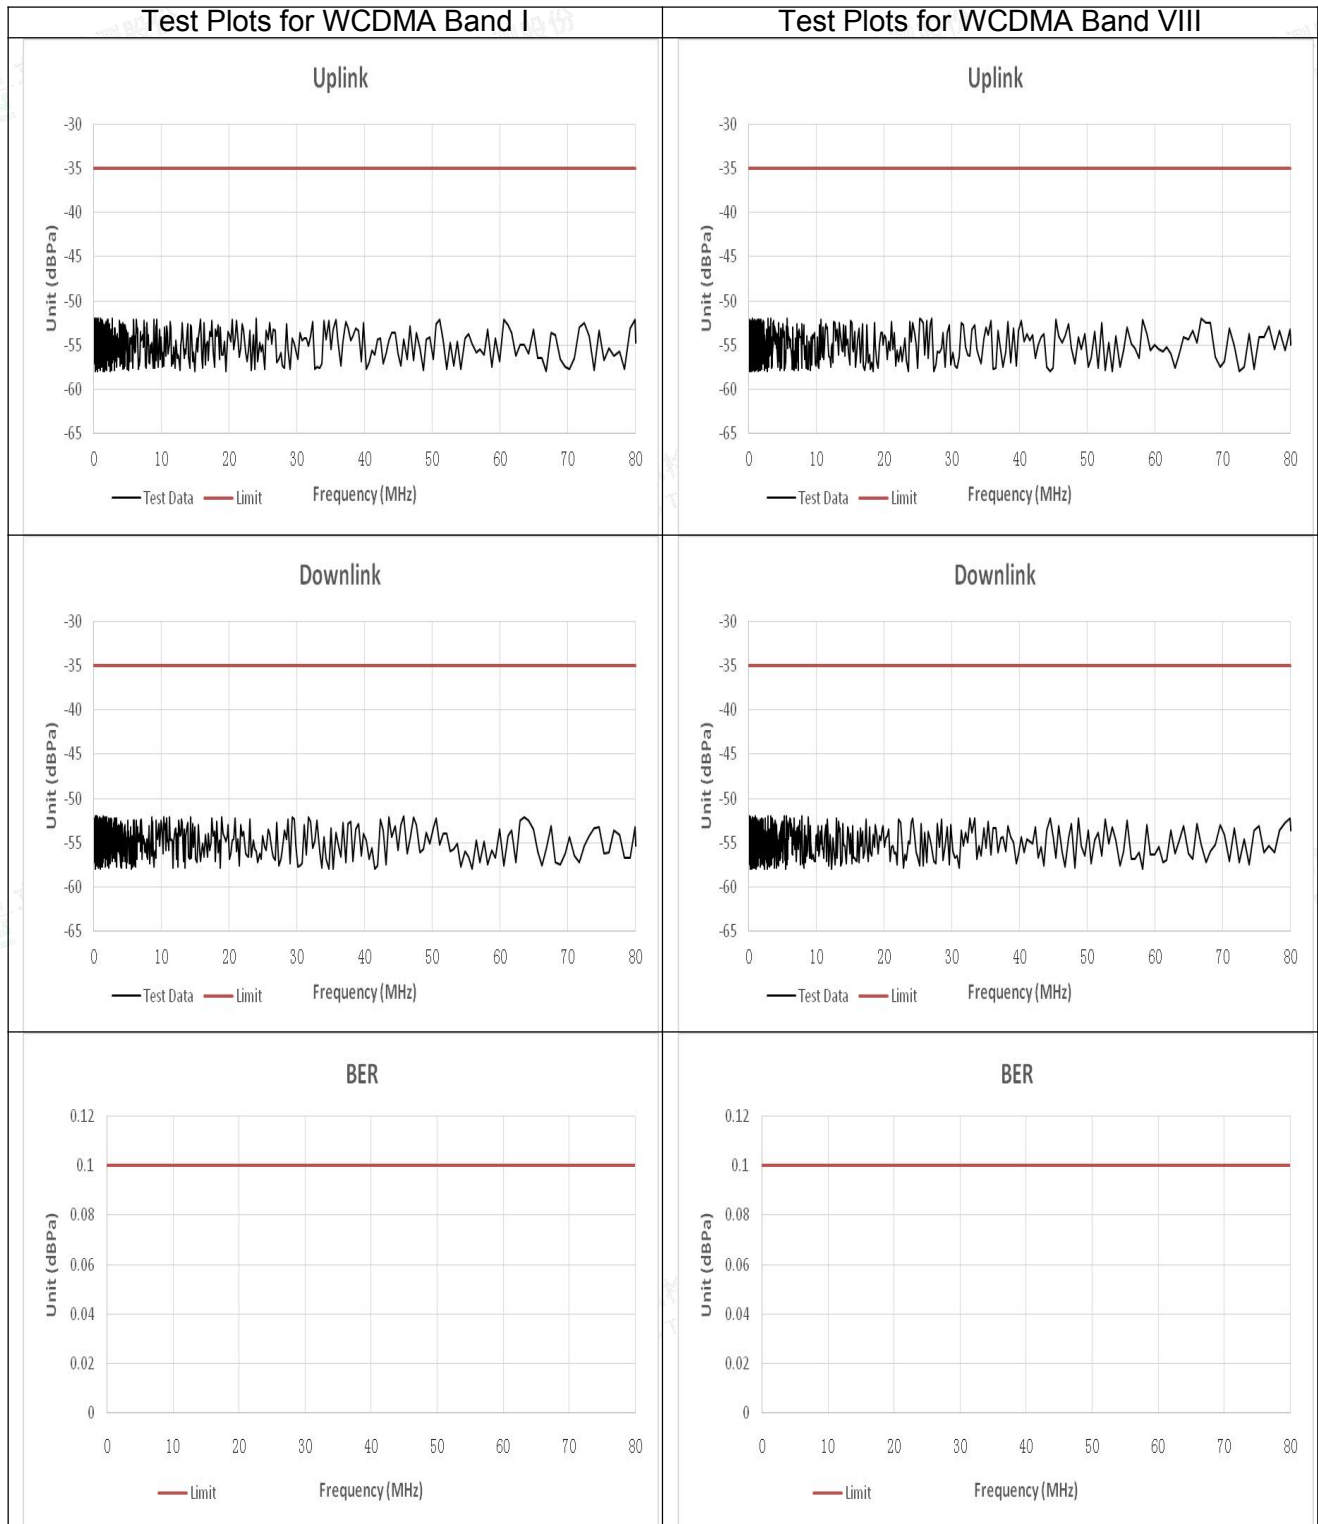

Note: The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

During the test, the Maximum Bit Error Ratio was less than 0.001

During the test, the Maximum Block Error Ratio was less than 0.01

For E-UTRA Band 1/3/7/8/20/28/38 (In the data transfer mode), the throughput is $\geq 95\%$ of the maximum throughput of the reference measurement channel as specified in annex C in TS 136 101 [13] with parameters specified in tables 7.3.1-1 and 7.3.1-2 in TS 136 101 [13] during the test sequence.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**A.10 Surges, Line to Line and Line to Ground**

Surge Immunity Test Result			
Standard	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
Applicant	myFirst Tech Asia Pte. Ltd.		
EUT	myFirst Fone R1s 、 myFirst Fone R1c	Temperature	22.4℃
M/N	KW1305	Humidity	53.5%
Test Mode	TM1-TM26	Criterion	B
Test Engineer	Taylor Hu		

TEST RESULT OF TM1-TM21						
Location	Polarit y	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Observation	Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0	TT, TR	Pass
	-	0°, 90°, 180°, 270°	5	1.0	TT, TR	Pass
TEST RESULT OF TM22-TM23						
Location	Polarit y	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Observation	Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0	TR	Pass
	-	0°, 90°, 180°, 270°	5	1.0	TR	Pass
TEST RESULT OF TM24-TM26						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result (Pass/Fail)	
L-N	+	0°, 90°, 180°, 270°	5	1.0	Pass	
	-	0°, 90°, 180°, 270°	5	1.0	Pass	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

**A.11 Voltage Dips/Interruptions Immunity Test**

Voltage Dips And Interruptions Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
Applicant	myFirst Tech Asia Pte. Ltd.		
EUT	myFirst Fone R1s、myFirst Fone R1c	Temperature	24.3℃
M/N	KW1305	Humidity	53.6%
Test Mode	TM1-TM26	Criterion	B&C
Test Engineer	Taylor Hu		

TEST RESULT OF TM1-TM21				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Observation	Result (Pass/Fail)
0	100	0.5P	TT, TR	Pass
0	100	1P	TT, TR	Pass
70	30	25P	TT, TR	Pass
0	100	250P	TT, TR	Pass

TEST RESULT OF TM21				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Observation	Result (Pass/Fail)
0	100	0.5P	TR	Pass
0	100	1P	TR	Pass
70	30	25P	TR	Pass
0	100	250P	TR	Pass

TEST RESULT OF TM24-TM26			
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Result (Pass/Fail)
0	100	0.5P	Pass
0	100	1P	Pass
70	30	25P	Pass
0	100	250P	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity