



中国认可
国际互认
检测
TESTING
CNAS L4595

RADIO TEST REPORT

For

myFirst Tech Asia Pte. Ltd.

myFirst Fone M1

Test Model: KW1602

Prepared for : myFirst Tech Asia Pte. Ltd.
Address : 31 Woodlands Close, #01-22 Woodlands Horizon
Singapore 737855

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : Room 101, 201, Building A and Room 301, Building C, Juji
Industrial Park, Yabianxueziwei, Shajing Street, Bao'an
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : January 15, 2025
Number of tested samples : 2
Sample No. : A250114072-1, A250114072-2
Serial number : Prototype
Date of Test : January 15, 2025 ~ February 24, 2025
Date of Report : February 25, 2025



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



RADIO TEST REPORT	
ETSI EN 301 908-1 V15.2.1 (2023-01)&ETSI EN 301 908-2 V13.1.1 (2020-06)	
Report Reference No.	LCSA12164390EF
Date of Issue	February 25, 2025
Testing Laboratory Name	Shenzhen LCS Compliance Testing Laboratory Ltd.
Address	Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China
Testing Location/ Procedure	Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing method <input type="checkbox"/>
Applicant's Name	myFirst Tech Asia Pte. Ltd.
Address	31 Woodlands Close, #01-22 Woodlands Horizon Singapore 737855
Test Specification	
Standard	ETSI EN 301 908-1 V15.2.1 (2023-01) ETSI EN 301 908-2 V13.1.1 (2020-06)
Test Report Form No	TRF-4-E-141 A/0
TRF Originator	Shenzhen LCS Compliance Testing Laboratory Ltd.
Master TRF	Dated 2017-06
Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test Item Description	myFirst Fone M1
Trade Mark	myFirst
Test Model	KW1602
Ratings	Input: DC 5V, 1000mA DC 3.85V by Rechargeable Li-ion Battery, 730mAh
Result	Positive

Compiled by:

Ling Zhu/ Administrator

Supervised by:

Jack Liu / Technique principal

Approved by:

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



RADIO -- TEST REPORT

Test Report No. : LCSA12164390EF	February 25, 2025 Date of issue
---	---

Test Model..... : KW1602

EUT..... : myFirst Fone M1

Applicant..... : myFirst Tech Asia Pte. Ltd.

Address..... : 31 Woodlands Close, #01-22Woodlands Horizon
Singapore 737855

Telephone..... : /

Fax..... : /

Manufacturer..... : myFirst Tech Asia Pte. Ltd.

Address..... : 31 Woodlands Close, #01-22Woodlands Horizon
Singapore 737855

Telephone..... : /

Fax..... : /

Factory..... : myFirst Tech Asia Pte. Ltd.

Address..... : 31 Woodlands Close, #01-22Woodlands Horizon
Singapore 737855

Telephone..... : /

Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Revision History

Report Version	Issue Date	Revision Content	Revised By
000	February 25, 2025	Initial Issue	---



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



TABLE OF CONTENTS

1. GENERAL INFORMATION	6
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2. SUPPORT EQUIPMENT LIST	9
1.3. EXTERNAL I/O	9
1.4. OBJECTIVE	9
1.5. TEST CONDITIONS	9
1.6. DESCRIPTION OF TEST MODE	10
1.7. MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	10
1.8. DESCRIPTION OF TEST FACILITY	10
2. SYSTEM TEST CONFIGURATION	11
2.1. JUSTIFICATION	11
2.2. EUT EXERCISE SOFTWARE	11
2.3. SPECIAL ACCESSORIES	11
2.4. BLOCK DIAGRAM/SCHEMATICS	11
2.5. EQUIPMENT MODIFICATIONS	11
2.6. TEST SETUP	11
3. SUMMARY OF TEST RESULTS	12
4. LIST OF MEASURING EQUIPMENT	14
5. PHOTOGRAPHS OF TEST SETUP	15
6. PHOTOGRAPHS OF THE EUT	15





1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT	: myFirst Fone M1
Test Model	: KW1602
Ratings	: Input: DC 5V, 1000mA DC 3.85V by Rechargeable Li-ion Battery, 730mAh
Hardware Version	: /
Software Version	: /
Bluetooth	:
Frequency Range	: 2402MHz~2480MHz
Channel Number	: 79 channels for Bluetooth V2.0 (BDR/EDR)
Channel Spacing	: 1MHz for Bluetooth V2.0 (BDR/EDR)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V2.0 (BDR/EDR)
Bluetooth Version	: V2.0
Antenna Description	: Internal Antenna, 0.33dBi(Max.)
WIFI(2.4G Band)	:
Frequency Range	: 2412MHz~2472MHz
Channel Spacing	: 5MHz
Channel Number	: 13 Channel for 20MHz bandwidth(2412~2472MHz)
Modulation Type	: 802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Antenna Description	: Internal Antenna, 0.33dBi(Max.)
2G	:
Support Band	: <input checked="" type="checkbox"/> GSM 900 (EU-Band) <input checked="" type="checkbox"/> DCS 1800 (EU-Band) <input checked="" type="checkbox"/> GSM 850 (U.S.-Band) <input checked="" type="checkbox"/> PCS 1900 (U.S.-Band)
Release Version	: R99
GPRS Class	: Class 12
Uplink	: GSM 900: 880MHz~915MHz DCS 1800: 1710MHz~1785MHz
Downlink	: GSM 900: 925MHz~960MHz DCS 1800: 1805MHz~1880MHz
Type Of Modulation	: GMSK for GSM/GPRS
Antenna Description	: Internal Antenna -3.28dBi (max.) For GSM 900 0.37dBi (max.) For DCS 1800
Power Class	: GSM 900: Level 5, DCS 1800: Level 0
3G	:



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Support Band : ☒ WCDMA Band I (EU-Band)
☒ WCDMA Band VIII (EU-Band)
Release Version : Release9
Uplink : WCDMA Band I: 1920MHz~1980MHz
WCDMA Band VIII: 880MHz~915MHz
Downlink : WCDMA Band I: 2110MHz~2170MHz
WCDMA Band VIII: 925MHz~960MHz
Type Of Modulation : QPSK/16QAM
Antenna Description : Internal Antenna
0.35dBi (max.) For WCDMA Band I
-3.28dBi (max.) For WCDMA Band VIII
Power Class : Level 3

LTE

Support Band : ☒ E-UTRA Band 1(EU-Band)
☒ E-UTRA Band 3(EU-Band)
☒ E-UTRA Band 7(EU-Band)
☒ E-UTRA Band 8(EU-Band)
☒ E-UTRA Band 20(EU-Band)
☒ E-UTRA Band 28(EU-Band)
☒ E-UTRA Band 38(EU-Band)
☒ E-UTRA Band 40(EU-Band)
LTE Release Version : Release12
FDD Band : Uplink: E-UTRA Band 1: 1920MHz~1980MHz
E-UTRA Band 3: 1710MHz~1785MHz
E-UTRA Band 7: 2500MHz~2570MHz
E-UTRA Band 8: 880MHz~915MHz
E-UTRA Band 20: 832MHz~862MHz
E-UTRA Band 28: 703MHz~748MHz
Downlink: E-UTRA Band 1: 2110MHz~2170MHz
E-UTRA Band 3: 1805MHz~1880MHz
E-UTRA Band 7: 2620MHz~2690MHz
E-UTRA Band 8: 925MHz~960MHz
E-UTRA Band 20: 791MHz~821MHz
E-UTRA Band 28: 758MHz~803MHz
TDD Band : E-UTRA Band 38: 2570MHz~2620MHz
E-UTRA Band 40: 2300MHz~2400MHz
Type Of Modulation : QPSK/16QAM
Antenna Description : Internal Antenna
0.35dBi (max.) For E-UTRA Band 1
0.37dBi (max.) For E-UTRA Band 3
0.33dBi (max.) For E-UTRA Band 7
-3.28dBi (max.) For E-UTRA Band 8



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





-4.31dBi (max.) For E-UTRA Band 20
-5.33dBi (max.) For E-UTRA Band 28
0.34dBi (max.) For E-UTRA Band 38
0.36dBi (max.) For E-UTRA Band 40

Power Class : Class 3

GPS Receiver :

Receive Frequency : 1575.42MHz

Channel Number : 1

Antenna Description : Internal Antenna, 0.43dBi(Max.)



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-46050200UU	---	CE

Note: The adapter is supplied by lab and only use tested.

1.3. External I/O

I/O Port Description	Quantity	Cable
Power Port	1	USB Cable: 0.8m, unshielded

1.4. Objective

Standard Referenced	Standard Title	Standard Version
ETSI EN 301 908-1	IMT cellular networks; Harmonised Standard for access to radio spectrum; Part 1: Introduction and common requirements; Release 15	V15.2.1 (2023-01)
ETSI EN 301 908-2	IMT cellular networks; Harmonised Standard for access to radio spectrum; Part 2: CDMA Direct Spread (UTRA FDD) User Equipment (UE)	V13.1.1 (2020-06)

The objective is to determine compliance with ETSI EN 301 908-1 V15.2.1 (2023-01) & ETSI EN 301 908-2 V13.1.1 (2020-06).

1.5. Test Conditions

Conditions	Temperature	Voltage
Normal	21-25°C	DC 3.85V
Low extreme Temperature/Low extreme Voltage (TL/VL);	-20°C	DC 3.47V
Low extreme Temperature/High extreme Voltage (TL/VH);	-20°C	DC 4.4V
High extreme Temperature/Low extreme Voltage (TH/VL);	45°C	DC 3.47V
High extreme Temperature/High extreme Voltage (TH/VH).	45°C	DC 4.4V

Note1: For all conditions, the humidity range is:40-75%, the pressure range is 86-106kPa. The High Voltage DC 4.4V and Low Voltage DC 3.47V was declared by manufacturer





1.6. Description Of Test Mode

1. WCDMA Band I

- 1). Low Channel Operation(9612Channel)
- 2). Middle Channel Operation(9750Channel)
- 3). High Channel Operation(9888Channel)

2. WCDMA Band VIII

- 1). Low Channel Operation(2713Channel)
- 2). Middle Channel Operation(2788Channel)
- 3). High Channel Operation(2862Channel)

1.7. Measurement Uncertainty (95% confidence levels, k=2)

Test Item		Uncertainty
Radio Frequency	:	0.9×10^{-4}
Total RF Power, Conducted	:	1.0 dB
RF Power Density, Conducted	:	1.8 dB
Spurious Emissions, Conducted	:	1.8 dB
All Emissions, Radiated	:	3.1 dB
Temperature	:	0.5°C
Humidity	:	1 %
DC And Low Frequency Voltages	:	1 %

1.8. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



2. SYSTEM TEST CONFIGURATION

2.1. Justification

N/A

2.2. EUT Exercise Software

N/A

2.3. Special Accessories

The special accessories were supplied by Shenzhen LCS Compliance Testing Laboratory Ltd.

2.4. Block Diagram/Schematics

Please refer to the related document.

2.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

2.6. Test Setup

Please refer to the test setup photo.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



3. SUMMARY OF TEST RESULTS

Test Engineer	:	Paddi Chen
Temperature/ Humidity:	:	23.5°C/ 52.7%

Reference Clause No. (ETSI EN 301 908-2)	Description of Test Items	WCDMA Band VIII	WCDMA Band I
		Result	Result
4.2.2	Transmitter maximum output power		
	Normal	Pass	Pass
	TL/VL	Pass	Pass
	TL/VH	Pass	Pass
	TH/VL	Pass	Pass
	TH/VH	Pass	Pass
	Transmitter maximum output power for HSDPA & HSUPA		
	Normal	Pass	Pass
	TL/VL	Pass	Pass
	TL/VH	Pass	Pass
	TH/VL	Pass	Pass
	TH/VH	Pass	Pass
4.2.3	Transmitter spectrum emission mask		
	Normal	Pass	Pass
	Transmitter spectrum emission mask for HSDPA & HSUPA		
	Normal	Pass	Pass
4.2.4	Transmitter spurious emissions		
	Normal	Pass	Pass
	Transmitter spurious emission for HSDPA & HSUPA		
	Normal	Pass	Pass
4.2.5	Transmitter minimum output power		
	Normal	Pass	Pass
	TL/VL	Pass	Pass
	TL/VH	Pass	Pass
	TH/VL	Pass	Pass
	TH/VH	Pass	Pass
4.2.6	Receiver Adjacent Channel Selectivity (ACS)		
	NT / NV	Pass	Pass
	Receiver Adjacent Channel Selectivity for HSDPA & HSUPA		
	NT / NV	Pass	Pass
4.2.7	Receiver blocking characteristics		
	Normal	Pass	Pass
4.2.8	Receiver spurious response		
	Normal	Pass	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4.2.9	Receiver intermodulation characteristics		
	Normal	Pass	Pass
4.2.10	Receiver spurious emissions		
	Normal	Pass	Pass
4.2.11	Out-of-synchronization handling of output power		
	Normal	Pass	Pass
4.2.12	Transmitter Adjacent Channel Leakage power Ratio (ACLR)		
	Normal	Pass	Pass
	TL/VL	Pass	Pass
	TL/VH	Pass	Pass
	TH/VL	Pass	Pass
	TH/VH	Pass	Pass
	Transmitter Adjacent Channel Leakage power Ratio (ACLR) for HSDPA & HSUPA		
	Normal	Pass	Pass
	TL/VL	Pass	Pass
	TL/VH	Pass	Pass
	TH/VL	Pass	Pass
	TH/VH	Pass	Pass
4.2.13	Receiver Reference Sensitivity level		
	Normal	Pass	Pass
	TL/VL	Pass	Pass
	TL/VH	Pass	Pass
	TH/VL	Pass	Pass
	TH/VH	Pass	Pass
	Receiver Reference Sensitivity level for HSDPA & HSUPA		
	Normal	Pass	Pass
	TL/VL	Pass	Pass
	TL/VH	Pass	Pass
	TH/VL	Pass	Pass
	TH/VH	Pass	Pass

Reference Clause No. (ETSI EN 301 908-1)	Description of Test Items	WCDMA Band VIII	WCDMA Band I
		Result	Result
4.2.2	Radiated emissions (UE)		
	Normal	Pass	Pass
4.2.4	Control and monitoring functions (UE)		
	Normal	Pass	Pass

***Note:

Result: Describes test result of Test Case.

Pass: Test Case passed on specified conformance test platform.

Normal(TN/VN): Normal temperature – 25°C; Normal voltage. – DC 3.85V

TH: High extreme Temperature – +45°C

VH: High extreme Voltage – DC 4.4V

TL: Low extreme Temperature – -20°C

VL: Low extreme Voltage – DC 3.47V

N/A: Not applicable.

—: Not test.



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



4. LIST OF MEASURING EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	LTE Test Software	Tonscend	JS1120-1	N/A	N/A	N/A
2	RF Control Unit	Tonscend	JS0806-1	158060009	2024-11-08	2025-11-07
3	MXA Signal Analyzer	Agilent	N9020A	MY51250905	2024-10-08	2025-10-07
4	DC Power Supply	Agilent	E3642A	N/A	2024-10-08	2025-10-07
5	MXG Vector Signal Generator	Agilent	N5182A	MY47071151	2024-06-06	2025-06-05
6	PSG Analog Signal Generator	Agilent	E8257D	MY4520521	2024-06-06	2025-06-05
7	Temperature & Humidity Chamber	Baro	/	/	2024-06-12	2025-06-11
8	EMI Test Software	Farad	EZ	/	N/A	N/A
9	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2022-08-17	2025-08-16
10	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-07-13	2027-07-12
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-08-03	2027-08-02
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2024-07-13	2027-07-12
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2024-07-13	2027-07-12
15	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2024-07-30	2025-07-29
16	EMI Test Receiver	R&S	ESR 7	101181	2024-06-06	2025-06-05
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2024-06-06	2025-06-05
18	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2024-10-08	2025-10-07
19	High-frequency amplifier	JS Denki Pte	PA0118-43	JSPA21009	2024-10-08	2025-10-07
20	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2024-06-06	2025-06-05
21	RF Filter	Micro-Tronics	BRC50718	017	2024-10-08	2025-10-07
22	RF Filter	Micro-Tronics	BRC50719	011	2024-10-08	2025-10-07
23	RF Filter	Micro-Tronics	BRC50720	011	2024-10-08	2025-10-07
24	RF Filter	Micro-Tronics	BRC50721	013	2024-10-08	2025-10-07
25	RF Filter	Micro-Tronics	BRM50702	195	2024-06-06	2025-06-05
26	6dB Attenuator	/	100W/6dB	1172040	2024-06-06	2025-06-05
27	3dB Attenuator	/	2N-3dB	/	2024-10-08	2025-10-07





5. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix D for Photographs of Test Setup_RF.

6. PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for Photographs of The EUT.



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Annex A

Transmitter maximum output power

The worst test result of maximum output power for WCDMA Band I

Test Condition		Measure Result (dBm)			Nominal Output Power (dBm)	Conclusion
Temperature (°C)	Voltage (Vdc)	Low Channel 9612	Middle Channel 9750	High Channel 9888		
TL	VL	22.88	22.87	22.86	24	Pass
	VN	22.97	22.98	23.00		Pass
	VH	22.93	22.94	22.97		Pass
TN	VL	23.09	23.07	23.15		Pass
	VN	23.17	23.14	23.09		Pass
	VH	23.16	23.09	23.09		Pass
TH	VL	22.83	22.79	22.73		Pass
	VN	22.81	22.87	22.88		Pass
	VH	22.87	22.82	22.76		Pass

The worst test result of maximum output power for WCDMA Band I (HSUPA)

Test Condition		Measure Result (dBm)			Nominal Output Power (dBm)	Conclusion
Temperature (°C)	Voltage (Vdc)	Low Channel 9612	Middle Channel 9750	High Channel 9888		
TL	VL	22.05	22.05	22.00	24	Pass
	VN	22.05	22.07	22.08		Pass
	VH	21.85	21.85	21.84		Pass
TN	VL	22.26	22.30	22.25		Pass
	VN	22.25	22.31	22.30		Pass
	VH	22.13	22.13	22.10		Pass
TH	VL	21.82	21.75	21.74		Pass
	VN	21.86	21.78	21.80		Pass
	VH	21.85	21.83	21.74		Pass

The worst test result of maximum output power for WCDMA Band I (HSDPA)

Test Condition		Measure Result (dBm)			Nominal Output Power (dBm)	Conclusion
Temperature (°C)	Voltage (Vdc)	Low Channel 9612	Middle Channel 9750	High Channel 9888		
TL	VL	21.98	21.99	22.00	24	Pass
	VN	21.88	21.97	21.99		Pass
	VH	21.89	21.87	21.84		Pass
TN	VL	22.21	22.21	22.22		Pass
	VN	22.27	22.29	22.31		Pass
	VH	22.08	22.05	22.05		Pass
TH	VL	21.67	21.61	21.60		Pass
	VN	21.78	21.81	21.83		Pass
	VH	21.67	21.62	21.64		Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



The worst test result of maximum output power for WCDMA Band VIII

Test Condition		Measure Result (dBm)			Nominal Output Power (dBm)	Conclusion
Temperature (°C)	Voltage (Vdc)	Low Channel 2713	Middle Channel 2788	High Channel 2862		
TL	VL	22.89	22.92	22.95	24	Pass
	VN	22.81	22.81	22.83		Pass
	VH	22.87	22.89	22.90		Pass
TN	VL	23.00	22.97	22.96		Pass
	VN	23.06	23.11	23.13		Pass
	VH	22.94	23.00	23.04		Pass
TH	VL	22.71	22.68	22.63		Pass
	VN	22.88	22.88	22.92		Pass
	VH	22.72	22.71	22.76		Pass

The worst test result of maximum output power for WCDMA Band VIII (HSUPA)

Test Condition		Measure Result (dBm)			Nominal Output Power (dBm)	Conclusion
Temperature (°C)	Voltage (Vdc)	Low Channel 2713	Middle Channel 2788	High Channel 2862		
TL	VL	21.76	21.84	21.80	24	Pass
	VN	21.94	21.96	21.95		Pass
	VH	21.92	21.90	21.91		Pass
TN	VL	22.07	22.09	22.06		Pass
	VN	22.10	22.15	22.15		Pass
	VH	22.01	22.08	22.14		Pass
TH	VL	21.75	21.83	21.80		Pass
	VN	21.78	21.80	21.88		Pass
	VH	21.67	21.65	21.61		Pass

The worst test result of maximum output power for WCDMA Band VIII (HSDPA)

Test Condition		Measure Result (dBm)			Nominal Output Power (dBm)	Conclusion
Temperature (°C)	Voltage (Vdc)	Low Channel 2713	Middle Channel 2788	High Channel 2862		
TL	VL	21.87	21.84	21.85	24	Pass
	VN	21.95	21.92	21.96		Pass
	VH	21.90	21.92	21.93		Pass
TN	VL	21.99	21.98	22.03		Pass
	VN	21.91	21.96	21.97		Pass
	VH	21.93	21.94	21.97		Pass
TH	VL	21.58	21.62	21.56		Pass
	VN	21.67	21.66	21.73		Pass
	VH	21.60	21.68	21.70		Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




Transmitter spurious emissions

(Note: Only Record The Worst Test Result.)


The Worst Test Result of Spurious Emissions for Band I (Middle Channel, Traffic)

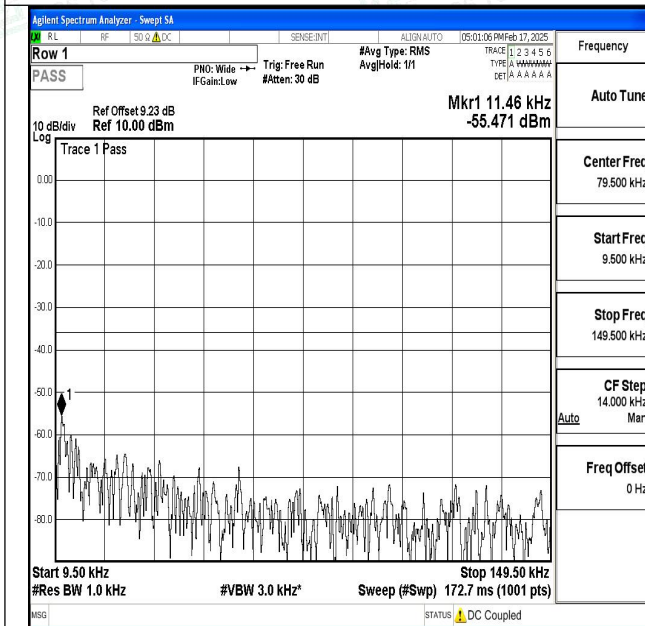


9.5KHz~149.5KHz

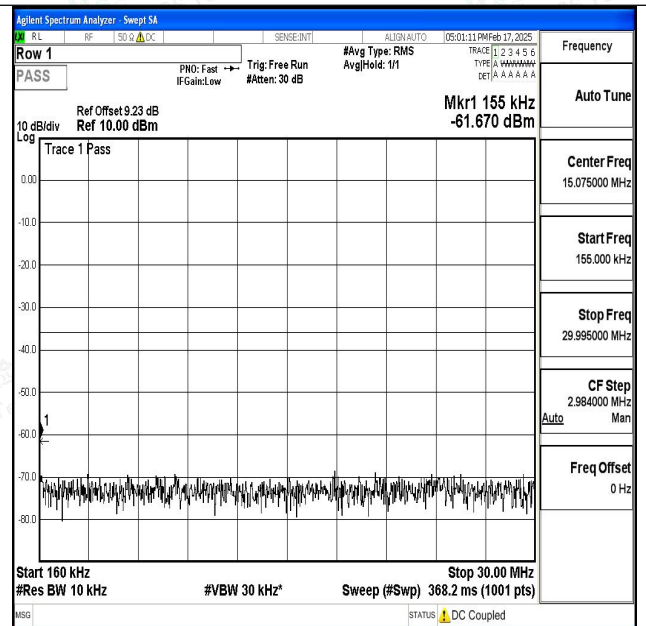

160KHz~30MKHz

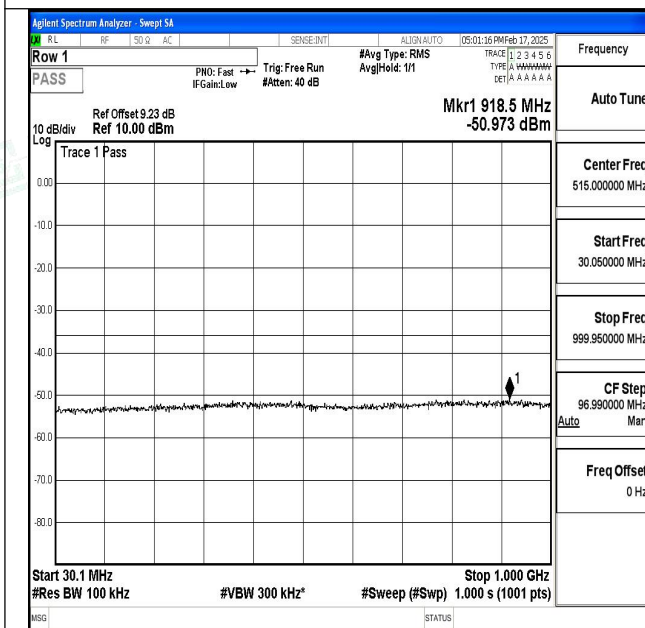

30.1MKHz~1GHz

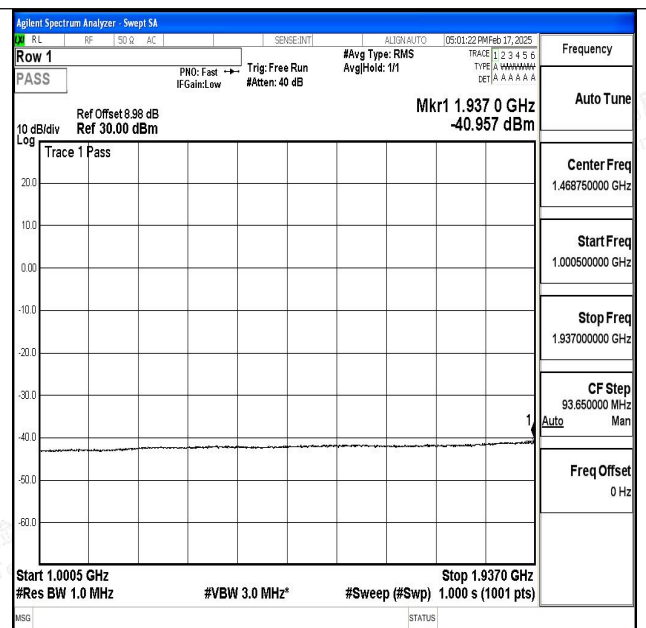

1.005GHz~1.937GHz




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

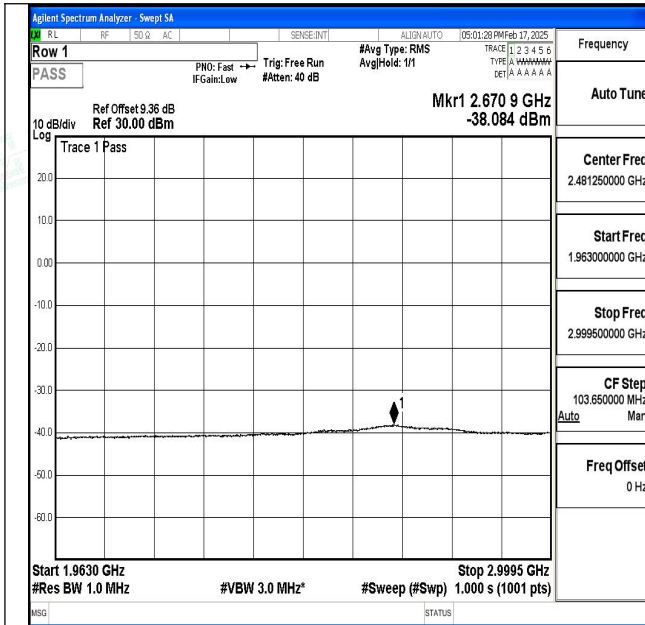


1.963GHz~2.9995GHz

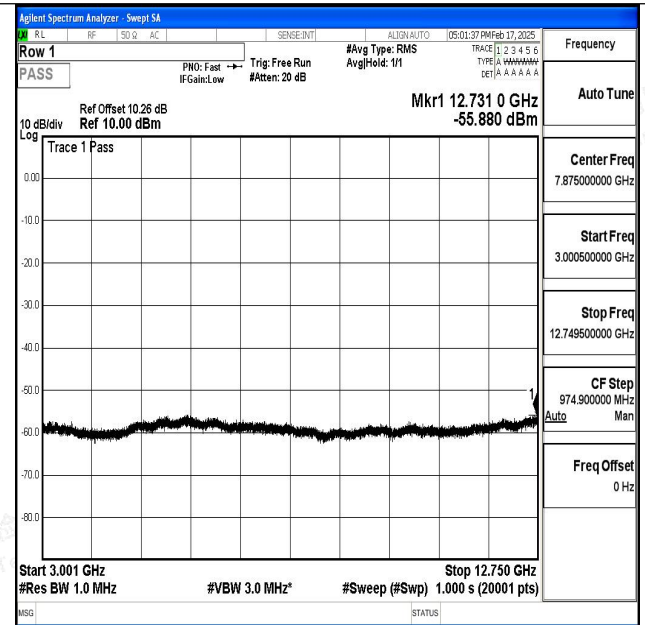


3.001GHz~12.75GHz

The Worst Test Result of Spurious Emissions for Band I (Middle Channel, Traffic)

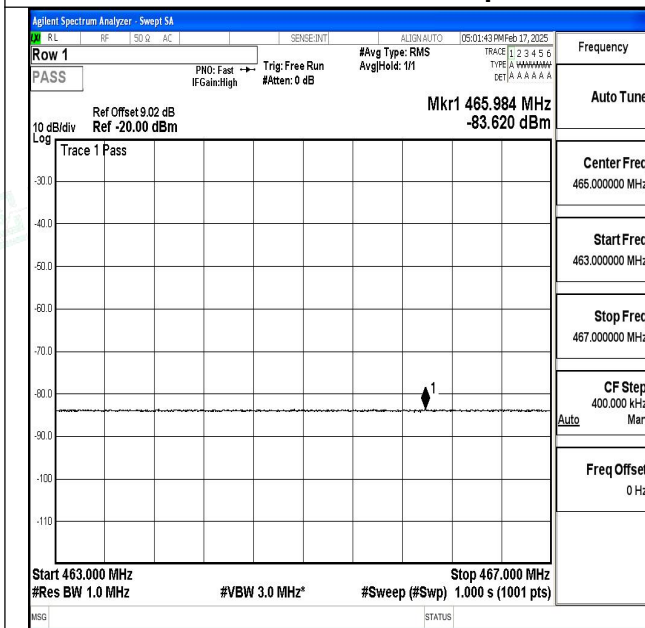

463.000MHz~467.000MHz

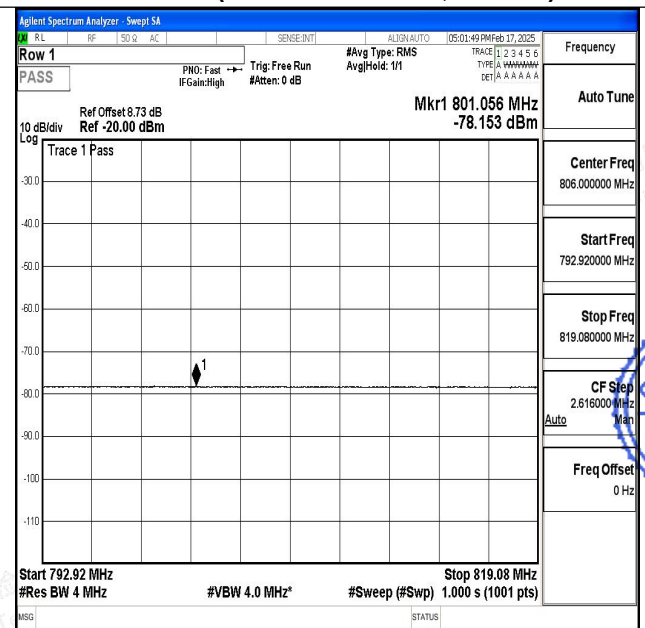

792.92MHz~819.08MHz




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

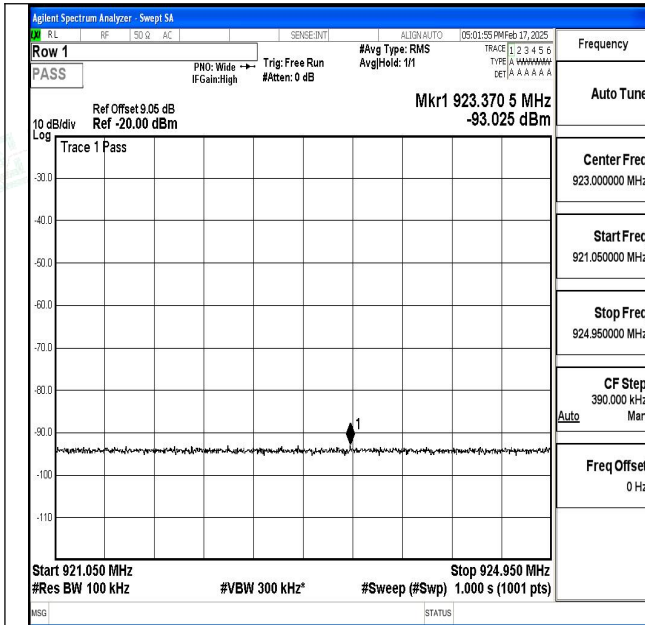


921.050MHz~924.950MHz

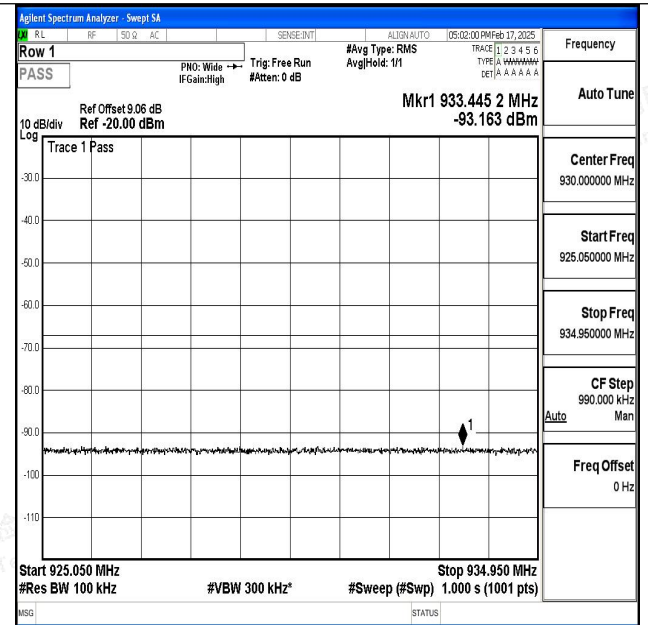

925.050MHz~934.950MHz

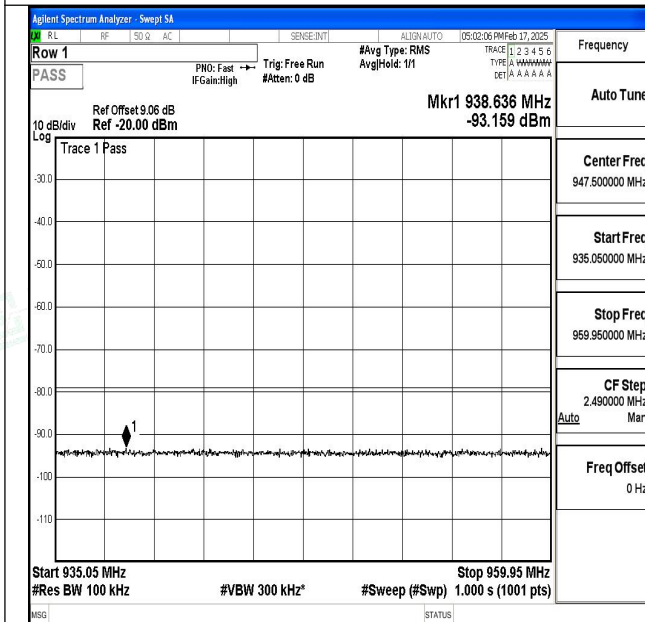

935.05MHz~959.95MHz

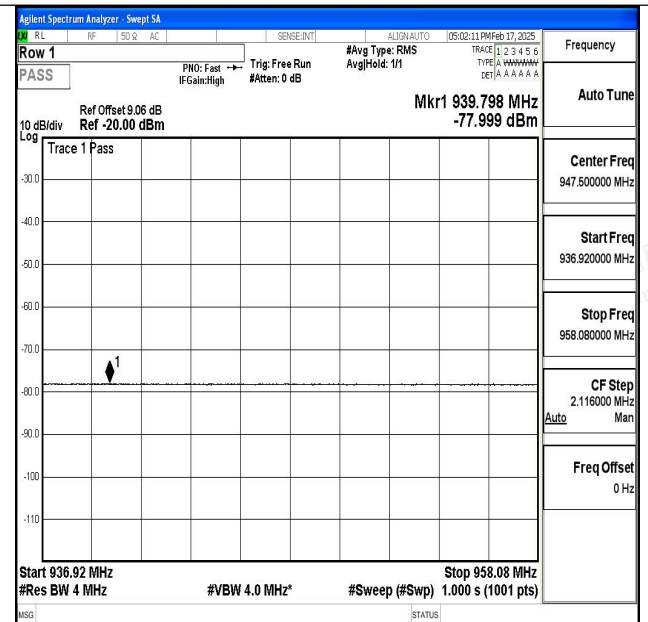

936.92MHz~958.08MHz




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

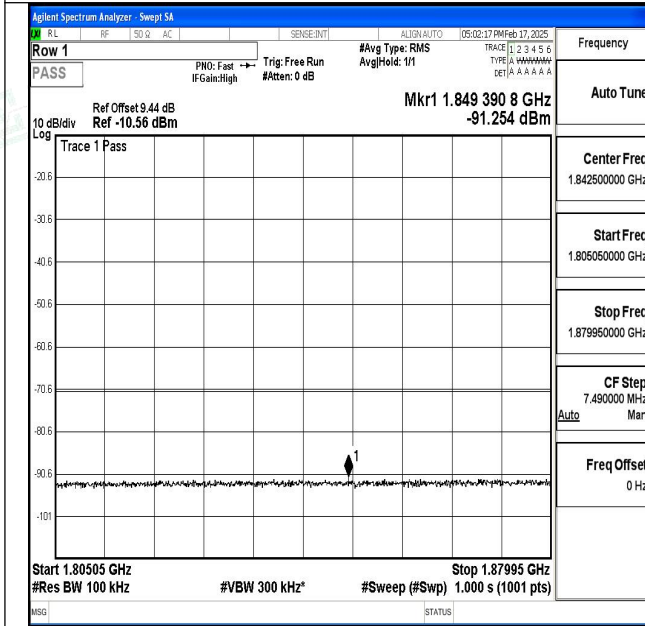**The Worst Test Result of Spurious Emissions for Band I (Middle Channel, Traffic)**


1.80505GHz~1.87995GHz

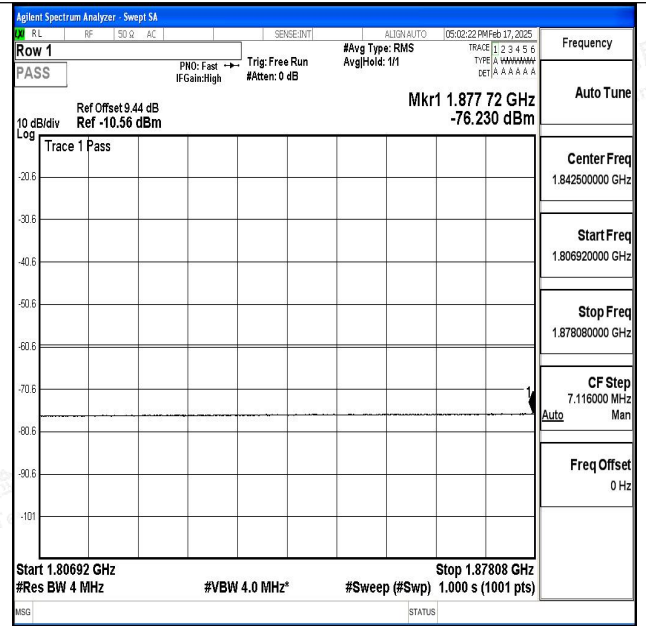

1.80692GHz~1.87808GHz

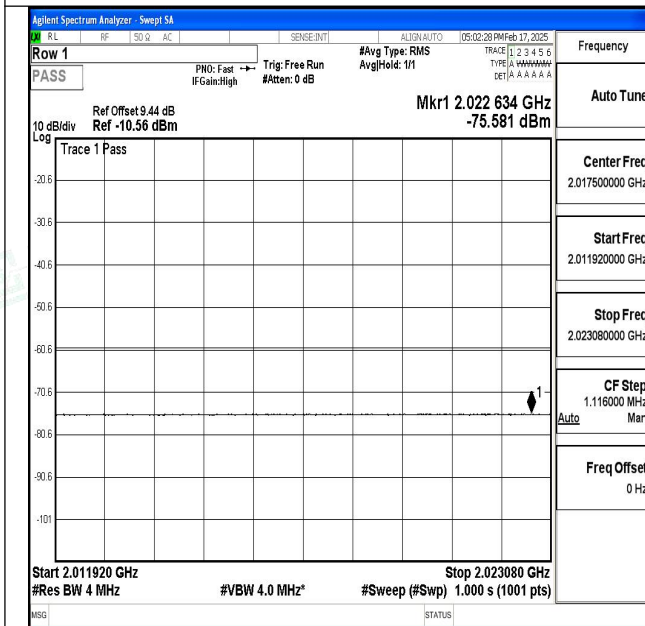

2.01192GHz~2.02308GHz

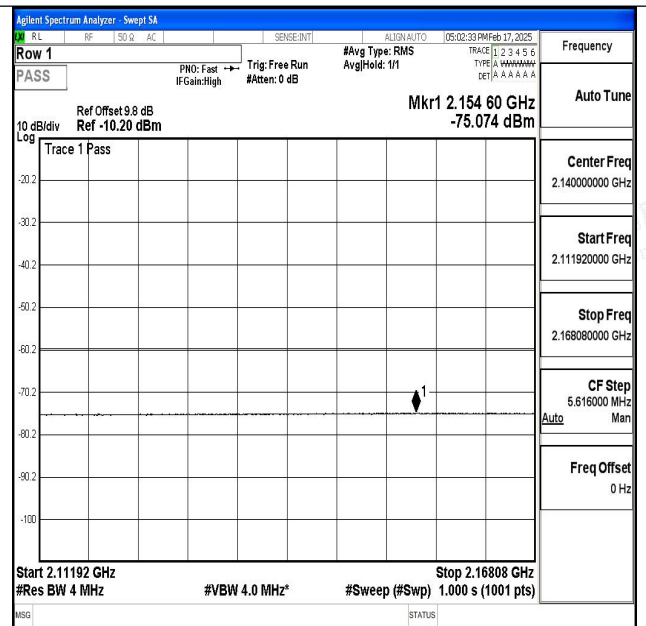

2.11192GHz~2.16808GHz





Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

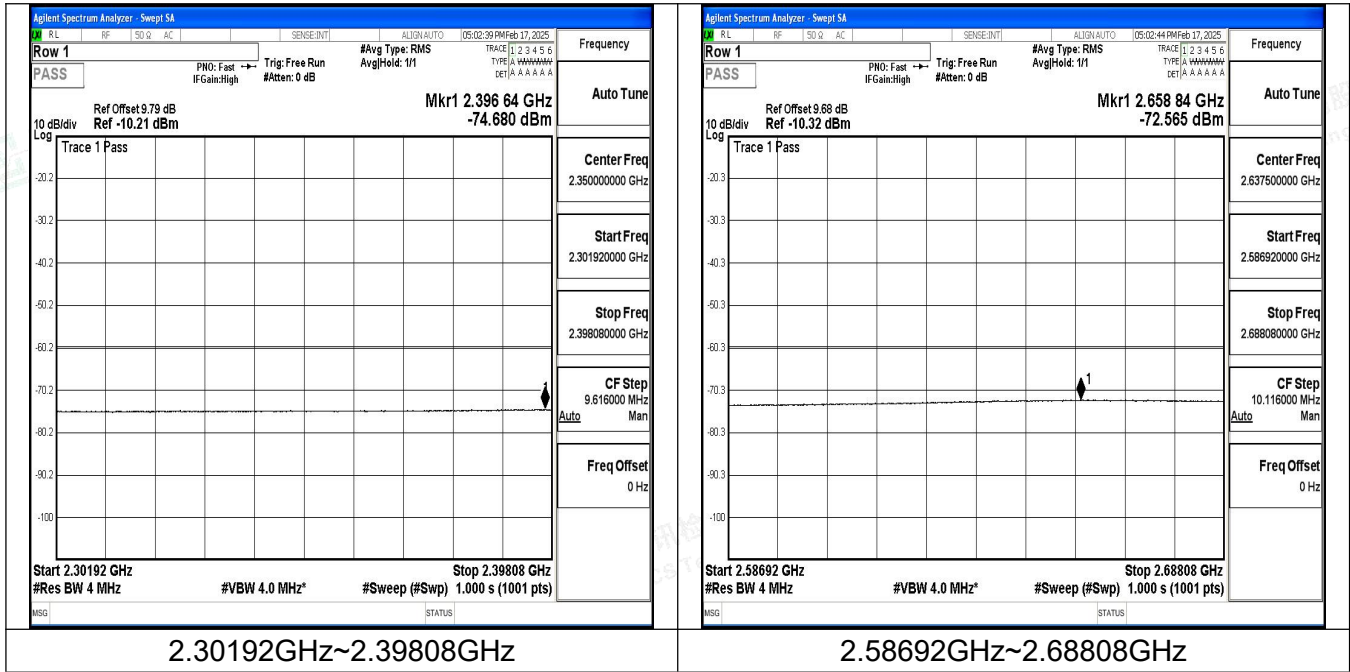


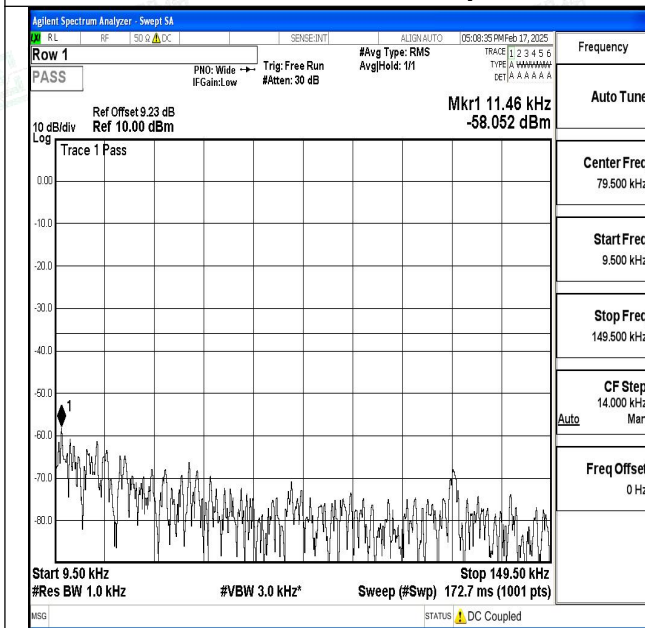**The Worst Test Result of Spurious Emissions for Band VIII (Middle Channel, Traffic)**


9.50KHz~149.50KHz

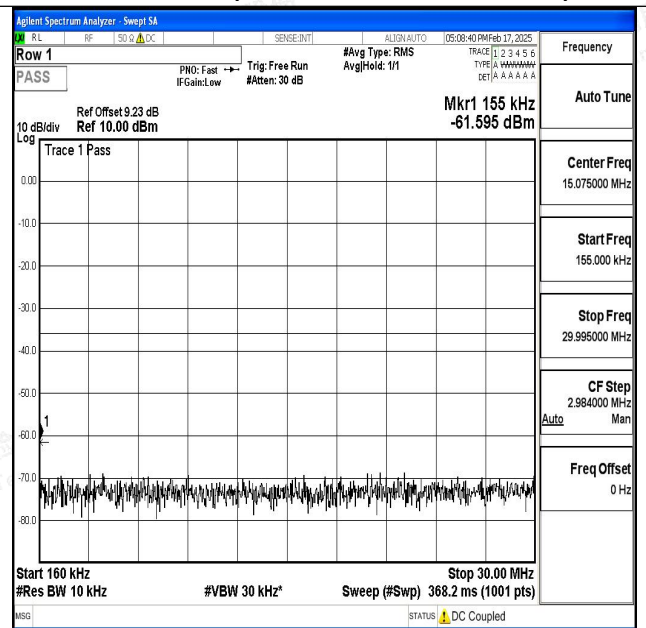

160KHz~30.00MHz

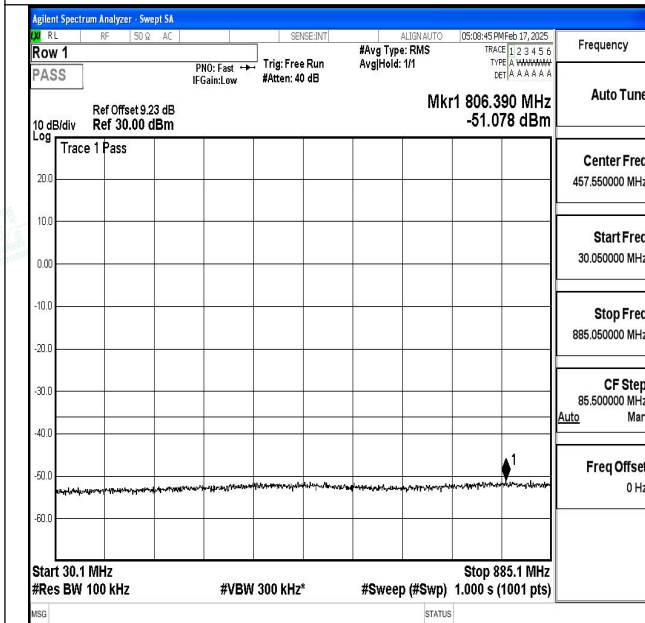

30.1MHz~885.1MHz

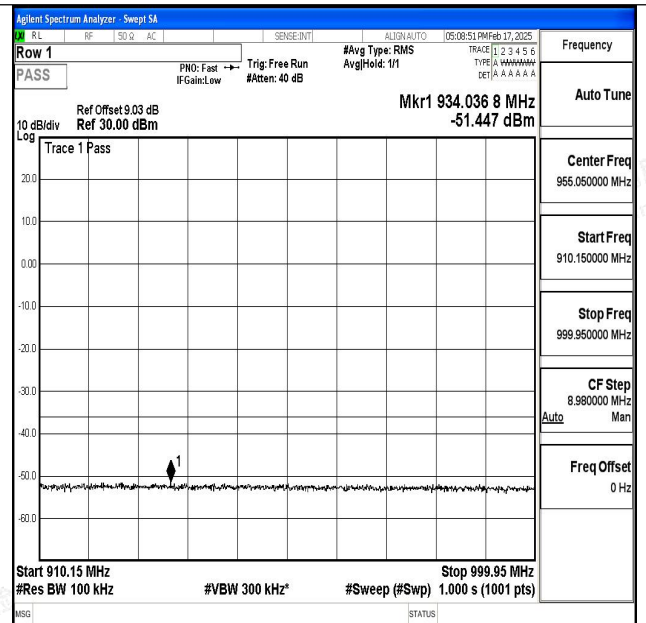

910.15MHz~999.95MHz




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

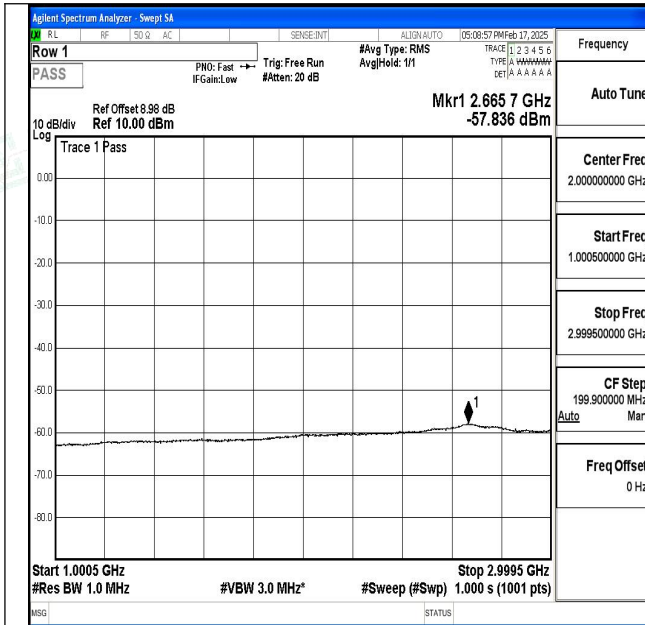


1.0005GHz~2.9995GHz

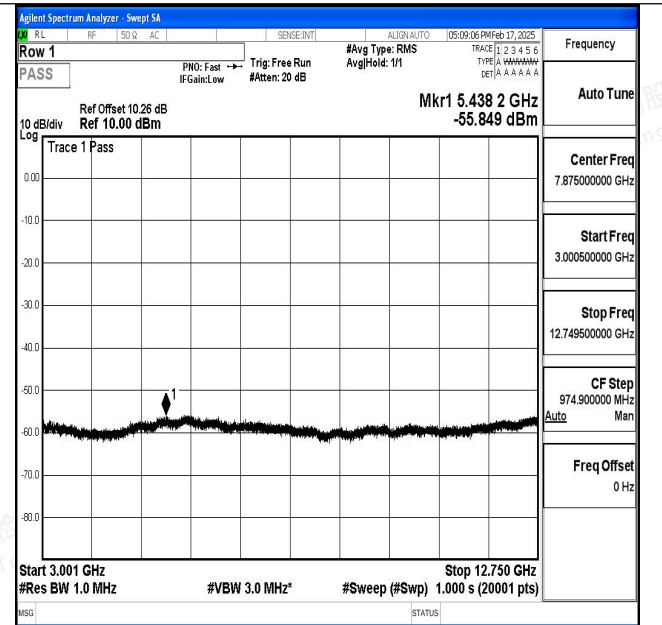


3.001GHz~12.750GHz

The Worst Test Result of Spurious Emissions for Band VIII (Middle Channel, Traffic)

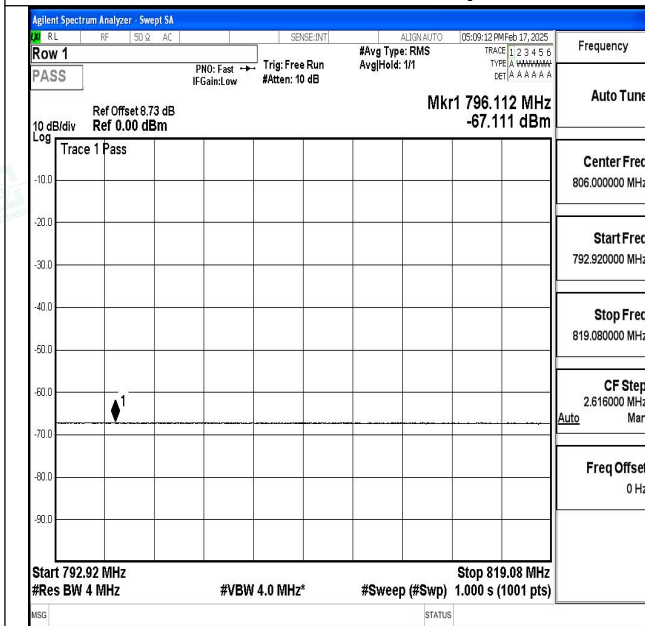

792.92MHz~819.08MHz

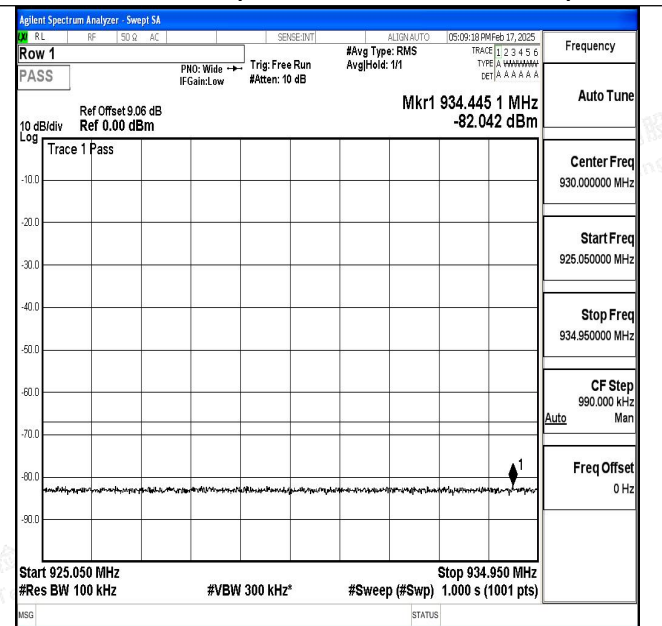

925.050MHz~934.950MHz




Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity

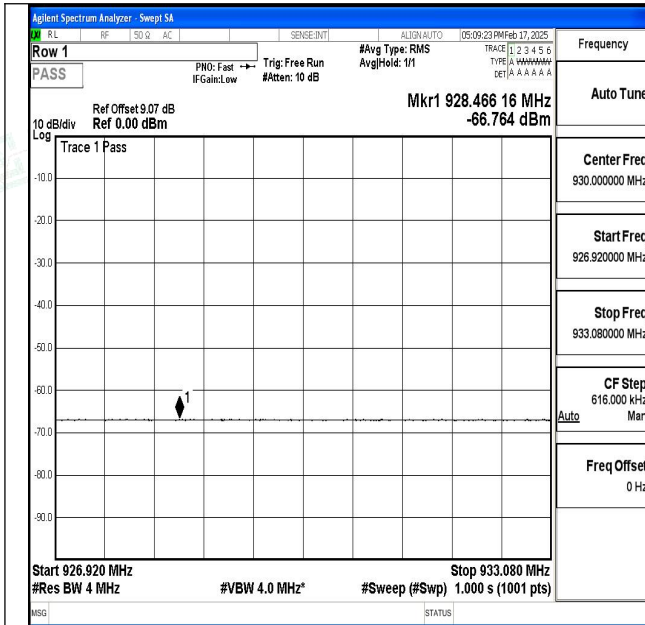


926.920MHz~933.080MHz

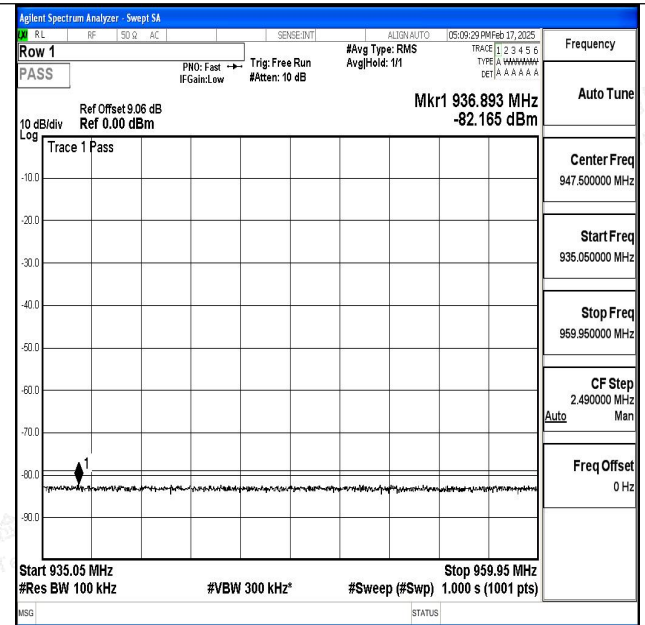

935.05MHz~959.95MHz

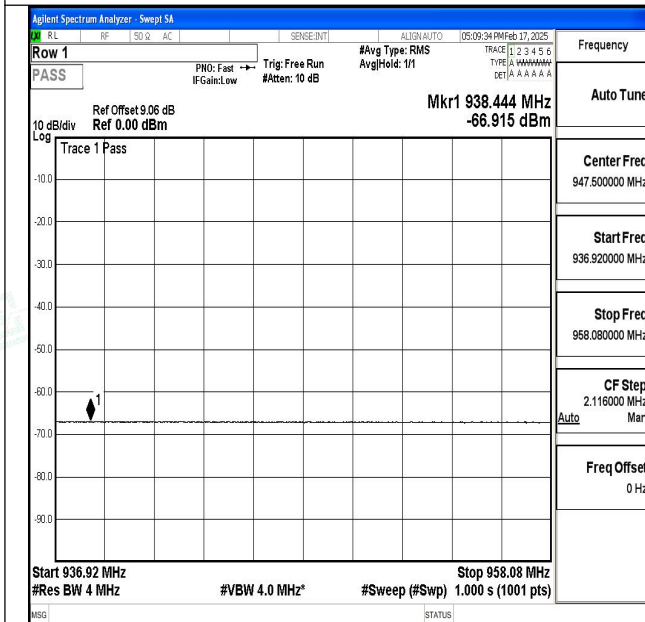

936.92MHz~958.08MHz

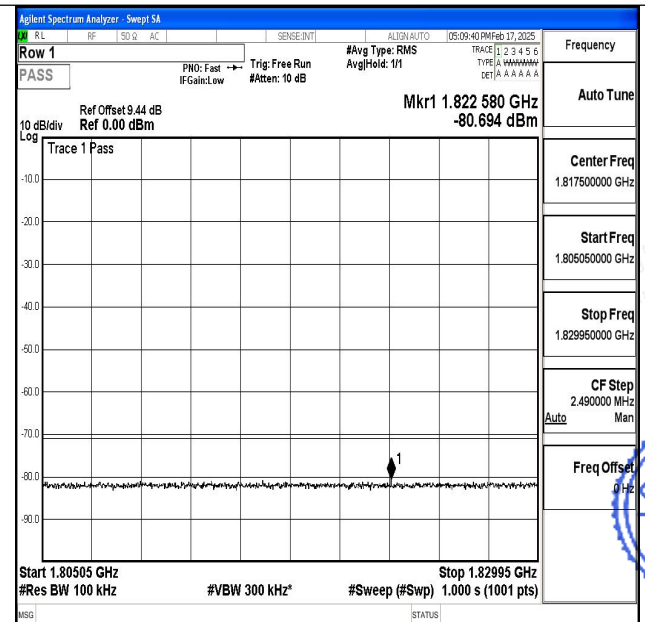

1.80505GHz~1.82995GHz




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

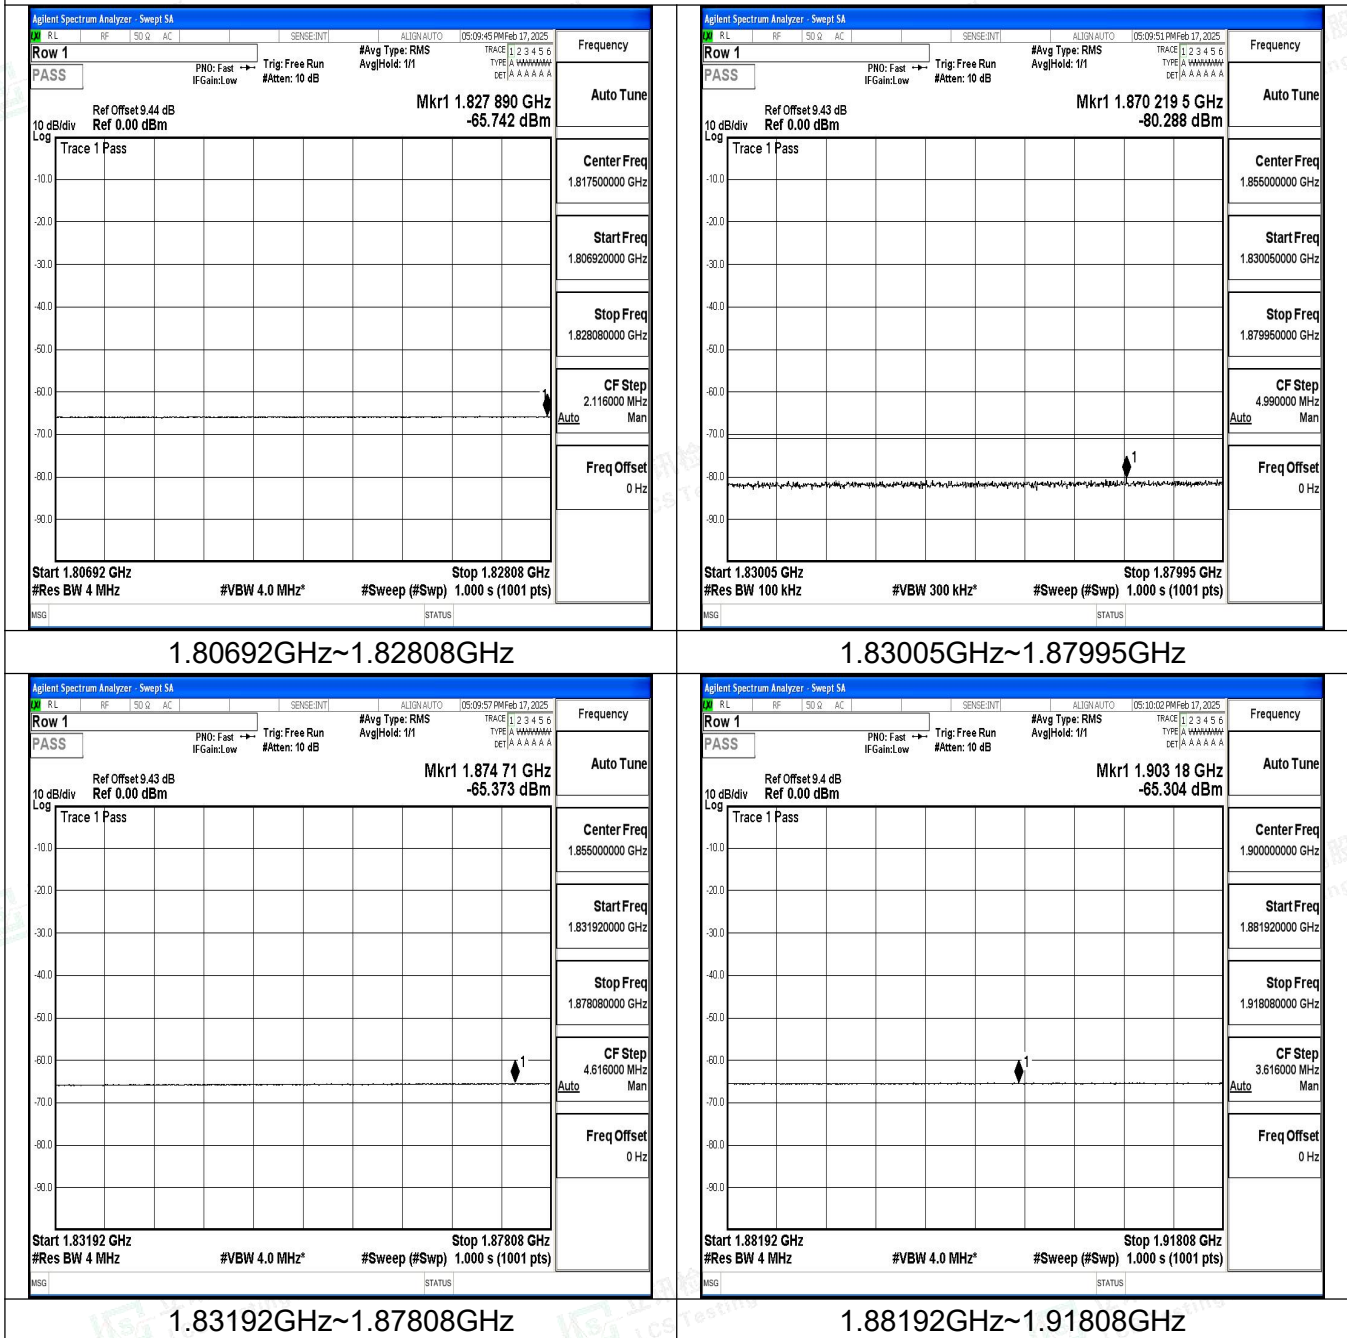**The Worst Test Result of Spurious Emissions for Band VIII (Middle Channel, Traffic)**

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity




The Worst Test Result of Spurious Emissions for Band VIII (Middle Channel, Traffic)

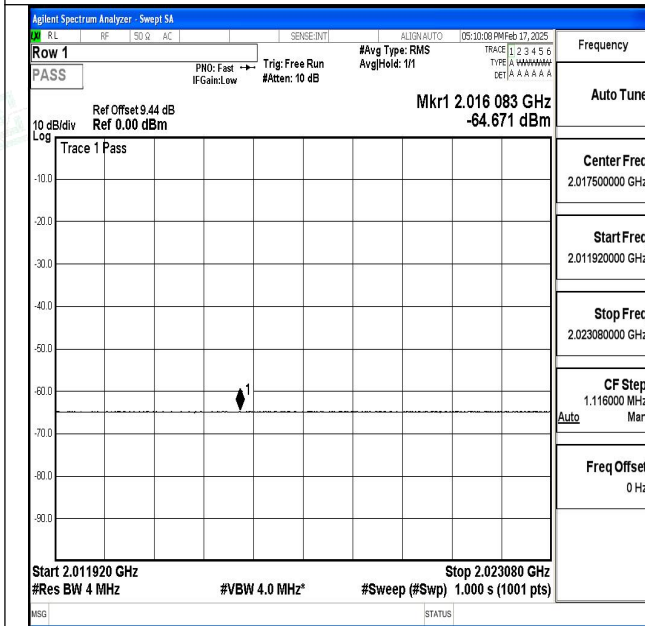


2.011920GHz~2.023080GHz

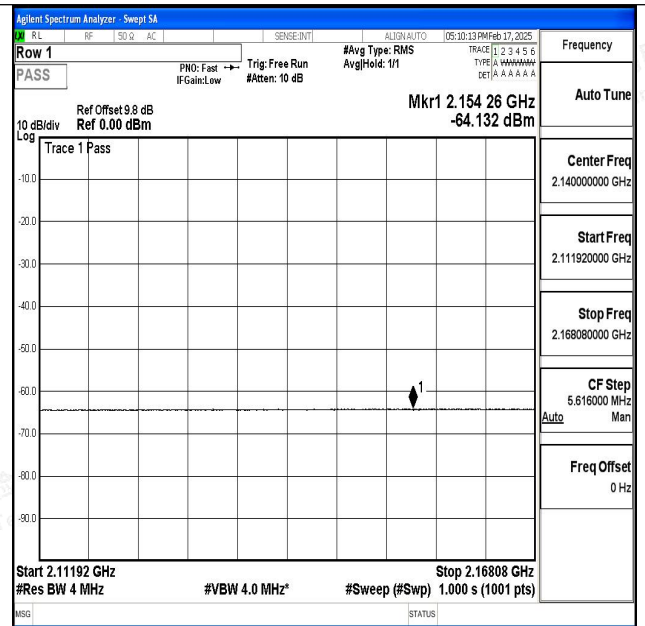

2.11192GHz~2.16808GHz

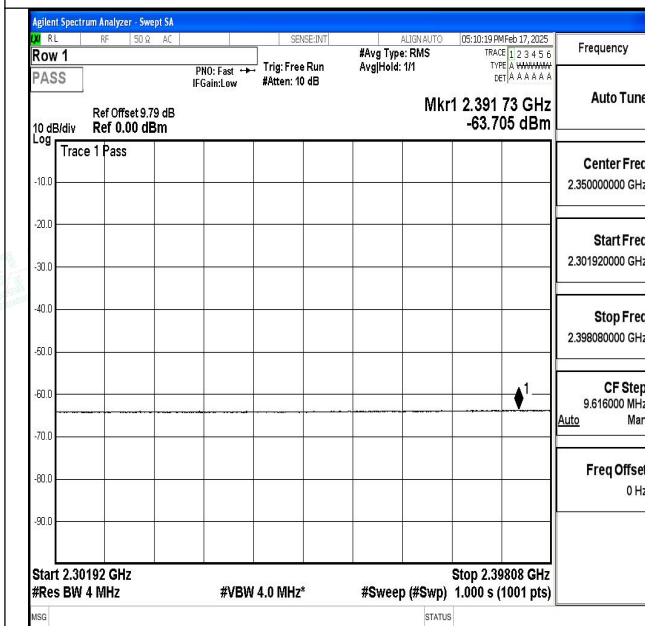

2.30192GHz~2.39808GHz

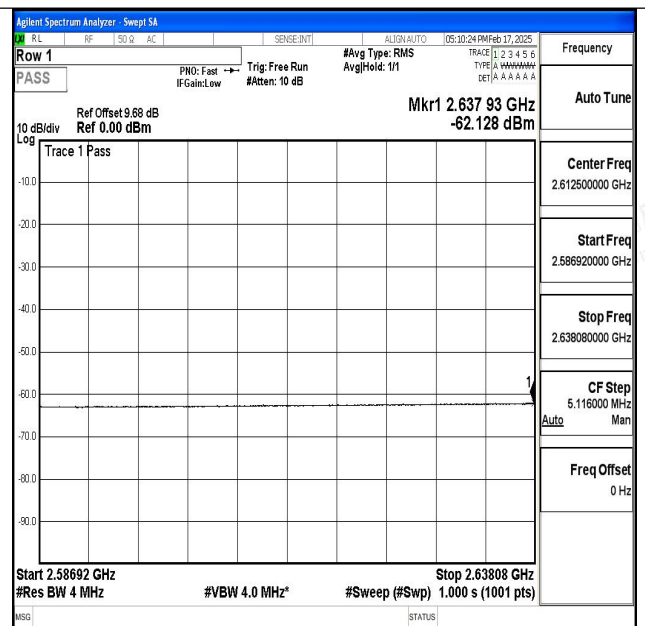

2.586920GHz~2.63808GHz




Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

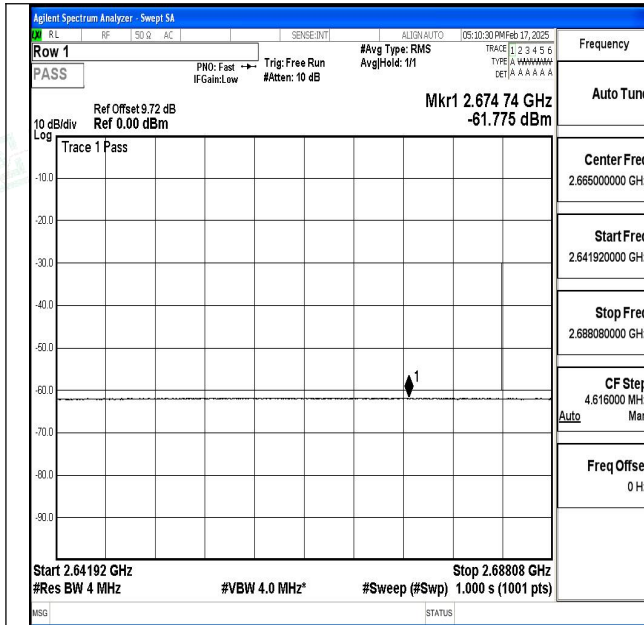

2.64192GHz~2.68808GHz





Transmitter spurious emissions

Radiated spurious emissions - MS allocated a channel(Worst Case)

WCDMA Band I: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
53.81	Horizontal	-74.86	-36.00	Pass
939.33	H	-74.12	-36.00	
3823.26	H	-65.18	-30.00	
5735.93	H	-56.64	-30.00	
7643.93	H	-58.07	-30.00	
WCDMA Band I: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
60.65	Vertical	-78.11	-36.00	Pass
704.92	V	-74.28	-36.00	
3823.17	V	-65.00	-30.00	
5731.22	V	-59.28	-30.00	
7643.33	V	-55.01	-30.00	

WCDMA Band VIII: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
57.74	Horizontal	-78.37	-36.00	Pass
751.99	H	-77.00	-36.00	
1285.29	H	-66.29	-30.00	
2580.25	H	-50.84	-30.00	
3505.86	H	-59.27	-30.00	
WCDMA Band VIII: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
60.29	Vertical	-73.23	-36.00	Pass
764.51	V	-79.32	-36.00	
1280.64	V	-68.68	-30.00	
2581.61	V	-51.01	-30.00	
3504.91	V	-54.64	-30.00	



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Radiated spurious emissions - MS in Idle Mode(Worst Case)

WCDMA Band I: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
56.01	Horizontal	-74.01	-57.00	Pass
884.70	H	-75.25	-57.00	
1689.44	H	-64.40	-47.00	
2576.32	H	-57.04	-47.00	
3244.71	H	-55.45	-47.00	
WCDMA Band I: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
51.05	Vertical	-78.18	-57.00	Pass
764.26	V	-73.43	-57.00	
1683.36	V	-60.34	-47.00	
2574.83	V	-57.96	-47.00	
3250.18	V	-57.26	-47.00	

WCDMA Band VIII: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
50.37	Horizontal	-77.01	-57.00	Pass
976.67	H	-70.01	-57.00	
1700.78	H	-70.21	-47.00	
2680.83	H	-52.82	-47.00	
3246.04	H	-56.27	-47.00	
WCDMA Band VIII: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
53.84	Vertical	-74.18	-57.00	Pass
702.41	V	-76.74	-57.00	
1698.46	V	-62.38	-47.00	
2680.78	V	-52.18	-47.00	
3249.38	V	-51.23	-47.00	

-----THE END OF REPORT-----



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity