



Appendix A for Emission and Immunity test results


Product Name: myFirst Fone R1s, S11

Test Model: KW1305, G4K1

A.1 Line Conducted Emission

***Note: For pre-scan, the worst case is TM1, and the test data was shown as follow:


Test Model	KW1305, G4K1	Test Mode	TM1
Environmental Conditions	23.3℃, 53.7% RH	Test Engineer	Li Huan
Pol.	Line	Test Voltage	AC 230V/50Hz

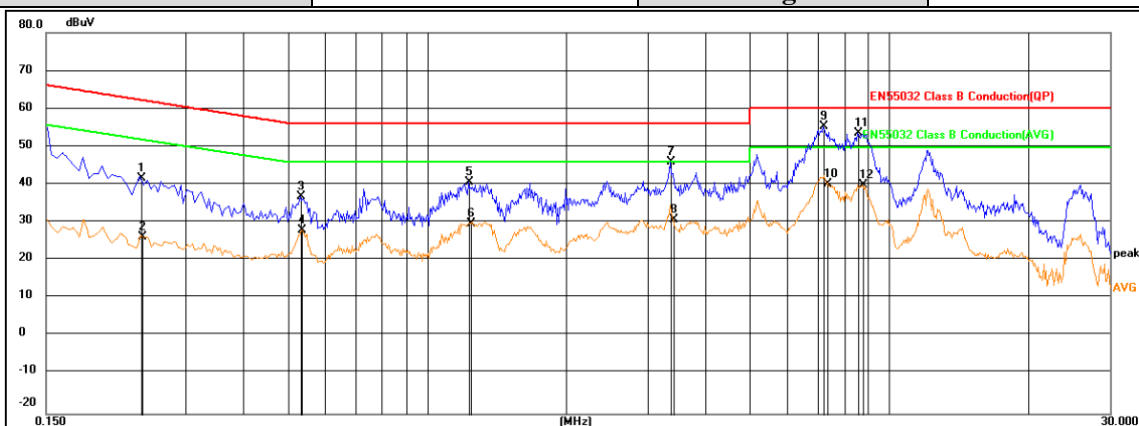

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2404	22.65	19.22	41.87	62.08	-20.21	QP
2	0.2429	7.28	19.22	26.50	52.00	-25.50	AVG
3	0.5325	17.92	19.15	37.07	56.00	-18.93	QP
4	0.5378	9.04	19.14	28.18	46.00	-17.82	AVG
5	1.2345	21.64	19.28	40.92	56.00	-15.08	QP
6	1.2435	10.83	19.28	30.11	46.00	-15.89	AVG
7	3.3765	26.63	19.46	46.09	56.00	-9.91	QP
8	3.4080	11.59	19.46	31.05	46.00	-14.95	AVG
9	7.2060	35.84	19.58	55.42	60.00	-4.58	QP
10	7.3635	20.81	19.59	40.40	50.00	-9.60	AVG
11	8.5785	33.93	19.64	53.57	60.00	-6.43	QP
12	8.7675	20.47	19.65	40.12	50.00	-9.88	AVG



Test Model	KW1305, G4K1	Test Mode	TM1
Environmental Conditions	23.3°C, 53.7% RH	Test Engineer	Li Huan
Pol.	Neutral	Test Voltage	AC 230V/50Hz

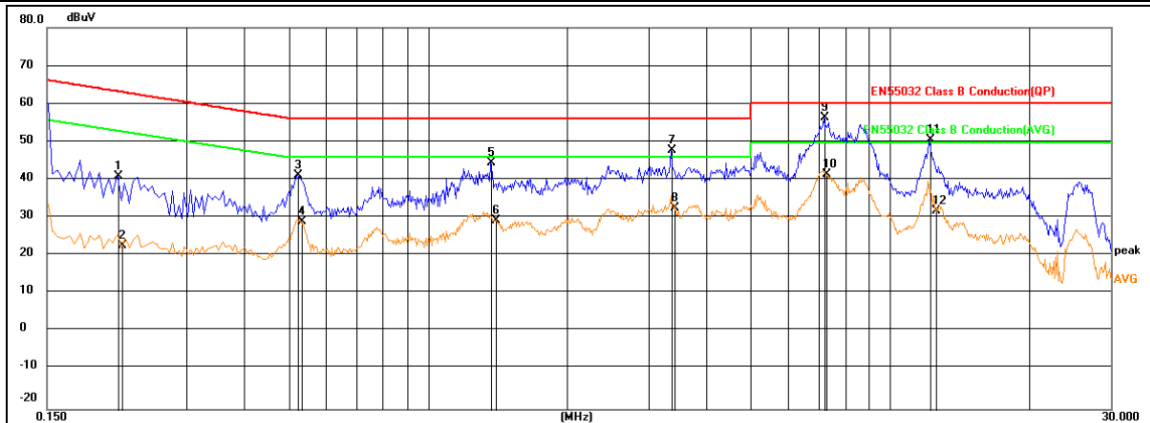

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2130	21.98	19.19	41.17	63.09	-21.92	QP
2	0.2185	3.81	19.20	23.01	52.88	-29.87	AVG
3	0.5235	22.26	19.17	41.43	56.00	-14.57	QP
4	0.5325	10.21	19.15	29.36	46.00	-16.64	AVG
5	1.3695	25.26	19.31	44.57	56.00	-11.43	QP
6	1.3965	10.13	19.32	29.45	46.00	-16.55	AVG
7	3.3810	28.47	19.46	47.93	56.00	-8.07	QP
8	3.4125	13.36	19.46	32.82	46.00	-13.18	AVG
9	7.2015	36.97	19.58	56.55	60.00	-3.45	QP
10	7.2555	22.07	19.59	41.66	50.00	-8.34	AVG
11	12.1965	30.72	19.88	50.60	60.00	-9.40	QP
12	12.5160	12.01	19.92	31.93	50.00	-18.07	AVG

Note: For conducted emission and radiated emission test, a power supply of 230VAC and 120VAC was used for testing respectively, and only recorded the worst case of 230VAC.



A.3 Radiated Disturbance

Test Model	KW1305, G4K1	Test Mode	TM1
Environmental Conditions	24.3°C, 54.3% RH	Test Engineer	Li Huan
Pol.	Vertical	Detector Function	Quasi-peak
Distance	3m	Test Voltage	AC 230V/50Hz



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	38.8878	38.71	-16.67	22.04	41.11	-19.07	QP
2	122.4040	42.16	-19.91	22.25	37.17	-14.92	QP
3	240.8304	41.19	-15.90	25.29	42.00	-16.71	QP
4	432.5457	38.89	-11.81	27.08	42.00	-14.92	QP
5	576.6443	36.32	-8.93	27.39	42.00	-14.61	QP
6 *	903.3094	40.09	-5.87	34.22	42.00	-7.78	QP



Test Model	KW1305, G4K1	Test Mode	TM1
Environmental Conditions	24.3°C, 54.3% RH	Test Engineer	Li Huan
Pol.	Horizontal	Detector Function	Quasi-peak
Distance	3m	Test Voltage	AC 230V/50Hz



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	40.4172	31.66	-16.33	15.33	40.98	-25.65	QP
2	122.4040	43.64	-19.91	23.73	37.17	-13.44	QP
3	240.8304	43.99	-15.90	28.09	42.00	-13.91	QP
4	432.5457	40.08	-11.81	28.27	42.00	-13.73	QP
5	576.6443	34.47	-8.93	25.54	42.00	-16.46	QP
6 *	900.1474	39.68	-5.89	33.79	42.00	-8.21	QP



Test Mode: TM1 (Above 1GHz)	Tested by: Li Huan
Test Voltage: AC 230V/50Hz	Test Distance: 3m
Detector Function: Peak + AV	Test Results: Passed

Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1126.02	49.26	1.14	50.40	70.00	-19.60	Peak	Horizontal
1126.02	30.56	1.14	31.70	50.00	-18.30	Average	Horizontal
1693.24	48.41	2.67	51.08	70.00	-18.92	Peak	Horizontal
1693.24	28.77	2.67	31.44	50.00	-18.56	Average	Horizontal
2396.19	50.62	5.75	56.37	70.00	-13.63	Peak	Horizontal
2396.19	31.11	5.75	36.86	50.00	-13.14	Average	Horizontal
3383.18	51.32	1.83	53.15	74.00	-20.85	Peak	Horizontal
3383.18	30.00	1.83	31.83	54.00	-22.17	Average	Horizontal
4189.36	50.69	3.17	53.86	74.00	-20.14	Peak	Horizontal
4189.36	28.48	3.17	31.65	54.00	-22.35	Average	Horizontal
5925.54	49.63	6.13	55.76	74.00	-18.24	Peak	Horizontal
5925.54	31.88	6.13	38.01	54.00	-15.99	Average	Horizontal

Freq. MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1126.20	51.01	1.14	52.15	70.00	-17.85	Peak	Vertical
1126.20	28.39	1.14	29.53	50.00	-20.47	Average	Vertical
1558.39	48.38	2.67	51.05	70.00	-18.95	Peak	Vertical
1558.39	29.54	2.67	32.21	50.00	-17.79	Average	Vertical
2918.34	51.71	5.75	57.46	70.00	-12.54	Peak	Vertical
2918.34	31.19	5.75	36.94	50.00	-13.06	Average	Vertical
3734.54	50.29	1.83	52.12	74.00	-21.88	Peak	Vertical
3734.54	29.51	1.83	31.34	54.00	-22.66	Average	Vertical
4597.11	50.40	3.17	53.57	74.00	-20.43	Peak	Vertical
4597.11	29.50	3.17	32.67	54.00	-21.33	Average	Vertical
5978.96	50.05	6.13	56.18	74.00	-17.82	Peak	Vertical
5978.96	29.58	6.13	35.71	54.00	-18.29	Average	Vertical

Note:

1. Field strength limits for frequency above 1000MHz are based on average limits. However, Peak mode field strength shall not exceed the average limits specified plus 20dB.
2. Measurements above show only up to 6 maximum emissions noted.
3. Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Factor = Antenna Factor + Cable Loss + Amplifier Factor
Emission Level = Reading level + Factor
Margin = Emission Level - Limit



A.4 Harmonic Current Emissions

Because power of EUT less than 75W, According standard EN 61000-3-2, Harmonic current unnecessary to test.

A.5 Voltage Fluctuation and Flicker

Test Model		KW1305, G4K1		Test Engineer		Li Huan	
Environmental Conditions		22.4℃, 53.5% RH		Test Voltage		AC 230V/50Hz	
	Type of Test:		Flickermeter Test - Table				
	Power Analyzer:		Voltech PM6000 SN: 200006700523 Firmware Version: v1.21.07RC2				
			Channel(s):				
			1. SN: 090015502053, 28 Adjusted Date: 22 JUN 2011. 2. SN:None Adjusted Date:None				
			3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None				
				5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
				Shunt(s):			
				1. SN: 091024301916, 4 Adjusted Date: 23 JUN 2011. 2. SN:None Adjusted Date:None			
				3. SN:None Adjusted Date:None 4. SN:None Adjusted Date:None			
				5. SN:None Adjusted Date:None 6. SN:None Adjusted Date:None			
AC Source:		Mains / Manual Source					
Overall Result:		Notes:					
PASS		Measurement method - Voltage					

**A.6 RF Electromagnetic Field (80 MHz - 6000 MHz)**

Test Model	KW1305, G4K1	Test Engineer	Li Huan
Environmental Conditions	23.6°C, 52.8% RH	Test Voltage	AC 230V/50Hz

MS Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
GSM/GPRS/EGPRS 900 MHz, Traffic	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
GSM/GPRS/EGPRS 900 MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
DCS/GPRS/EGPRS 1800 MHz, Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
DCS/GPRS/EGPRS 1800 MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
WCDMA/ HSDPA/HSUPA Band I 2100 MHz, Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
WCDMA HSDPA/HSUPA Band I 2100MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
WCDMA/ HSDPA/HSUPA Band VIII 900MHz, Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
WCDMA HSDPA/HSUPA Band VIII 900MHz, Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
E-UTRA Band 1 Traffic	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
E-UTRA Band 1 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
E-UTRA Band 3 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
E-UTRA	Vertical	80-6000	3	See Note	Front, Right,	Pass



Band 3 Idle					Left, Back	
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
E-UTRA Band 7 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
E-UTRA Band 7 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
E-UTRA Band 8 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
E-UTRA Band 8 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
E-UTRA Band 20 Traffic	Vertical	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT,CR	Front, Right, Left, Back	Pass
E-UTRA Band 20 Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

Bluetooth Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

2.4G WIFI Test Result:

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CT, CR	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

**GPS Test Result:**

EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	CR	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	CR	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

TM19-TM20Test Result:


EUT Working Mode	Antenna Polarity	Frequency (MHz)	Fielded Strength (V/m)	Observation	Position	Conclusion
Operating Mode	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass
Idle	Vertical	80-6000	3	See Note	Front, Right, Left, Back	Pass
	Horizontal	80-6000	3	See Note	Front, Right, Left, Back	Pass

Special conditions for EMC immunity tests

EUT Operating Mode		Polarity	Conclusion
GSM 900	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	RX Quality	H	Pass
		V	Pass
DCS 1800	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	RX Quality	H	Pass
		V	Pass
WCDMA HSDPA/HSUPA Band I 2100MHz	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	BER	H	Pass
		V	Pass
WCDMA HSDPA/HSUPA Band VIII 900MHz	Uplink	H	Pass
		V	Pass
	Downlink	H	Pass
		V	Pass
	BER	H	Pass
		V	Pass




Test Plots for GSM 900 (80MHz ~ 1000MHz)

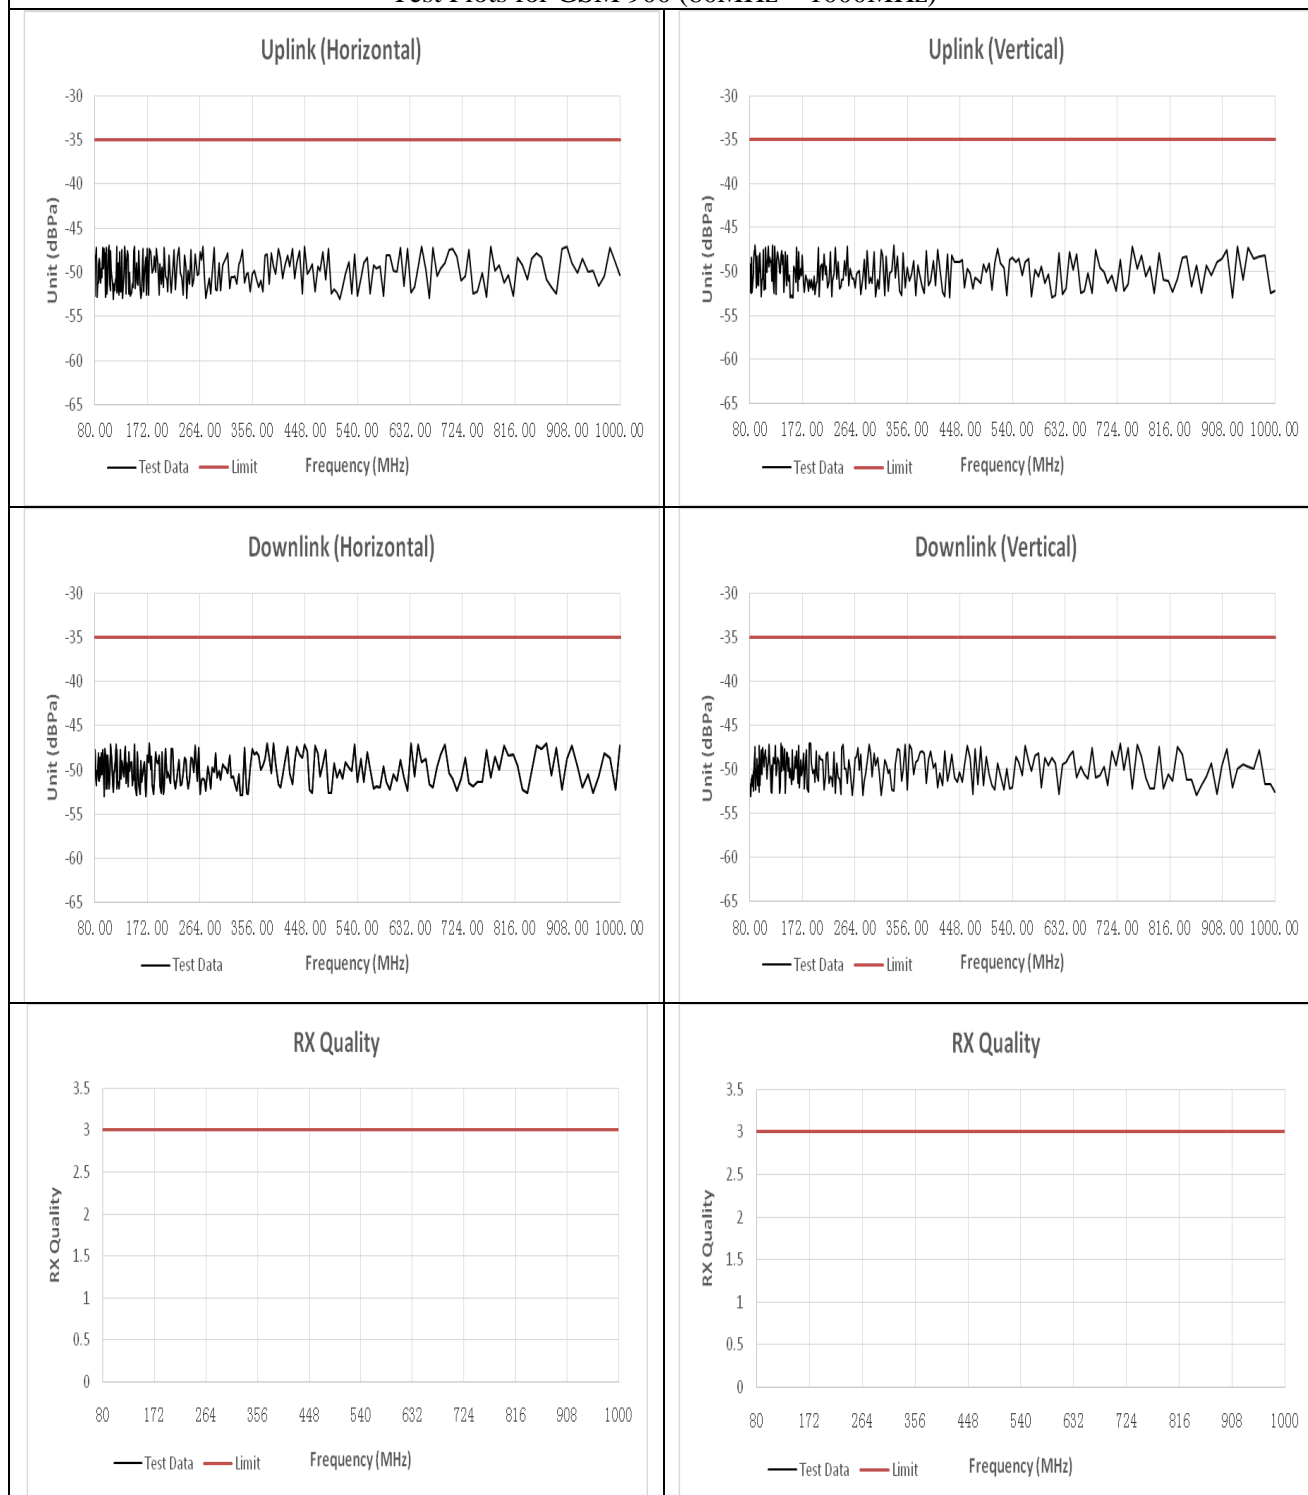




Test Plots for GSM 900 (1GHz ~ 6GHz)

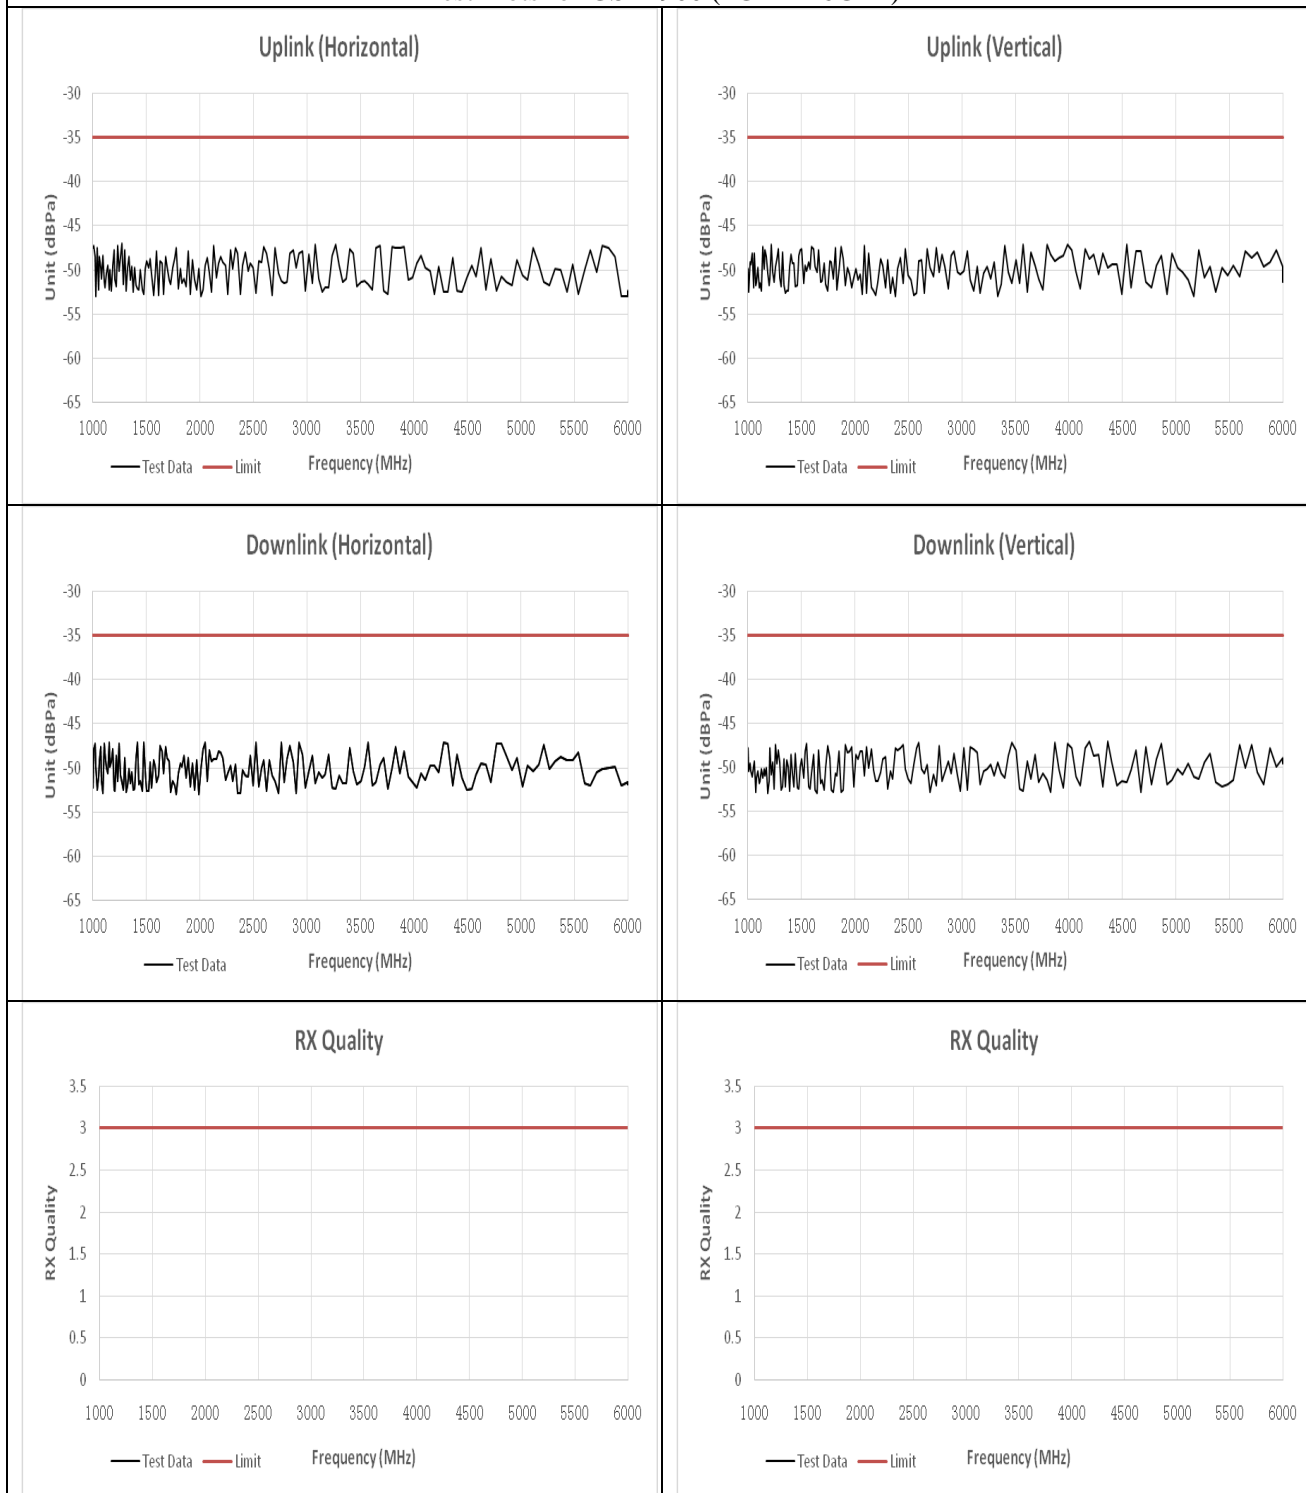




Test Plots for DCS 1800 (80MHz ~ 1000MHz)

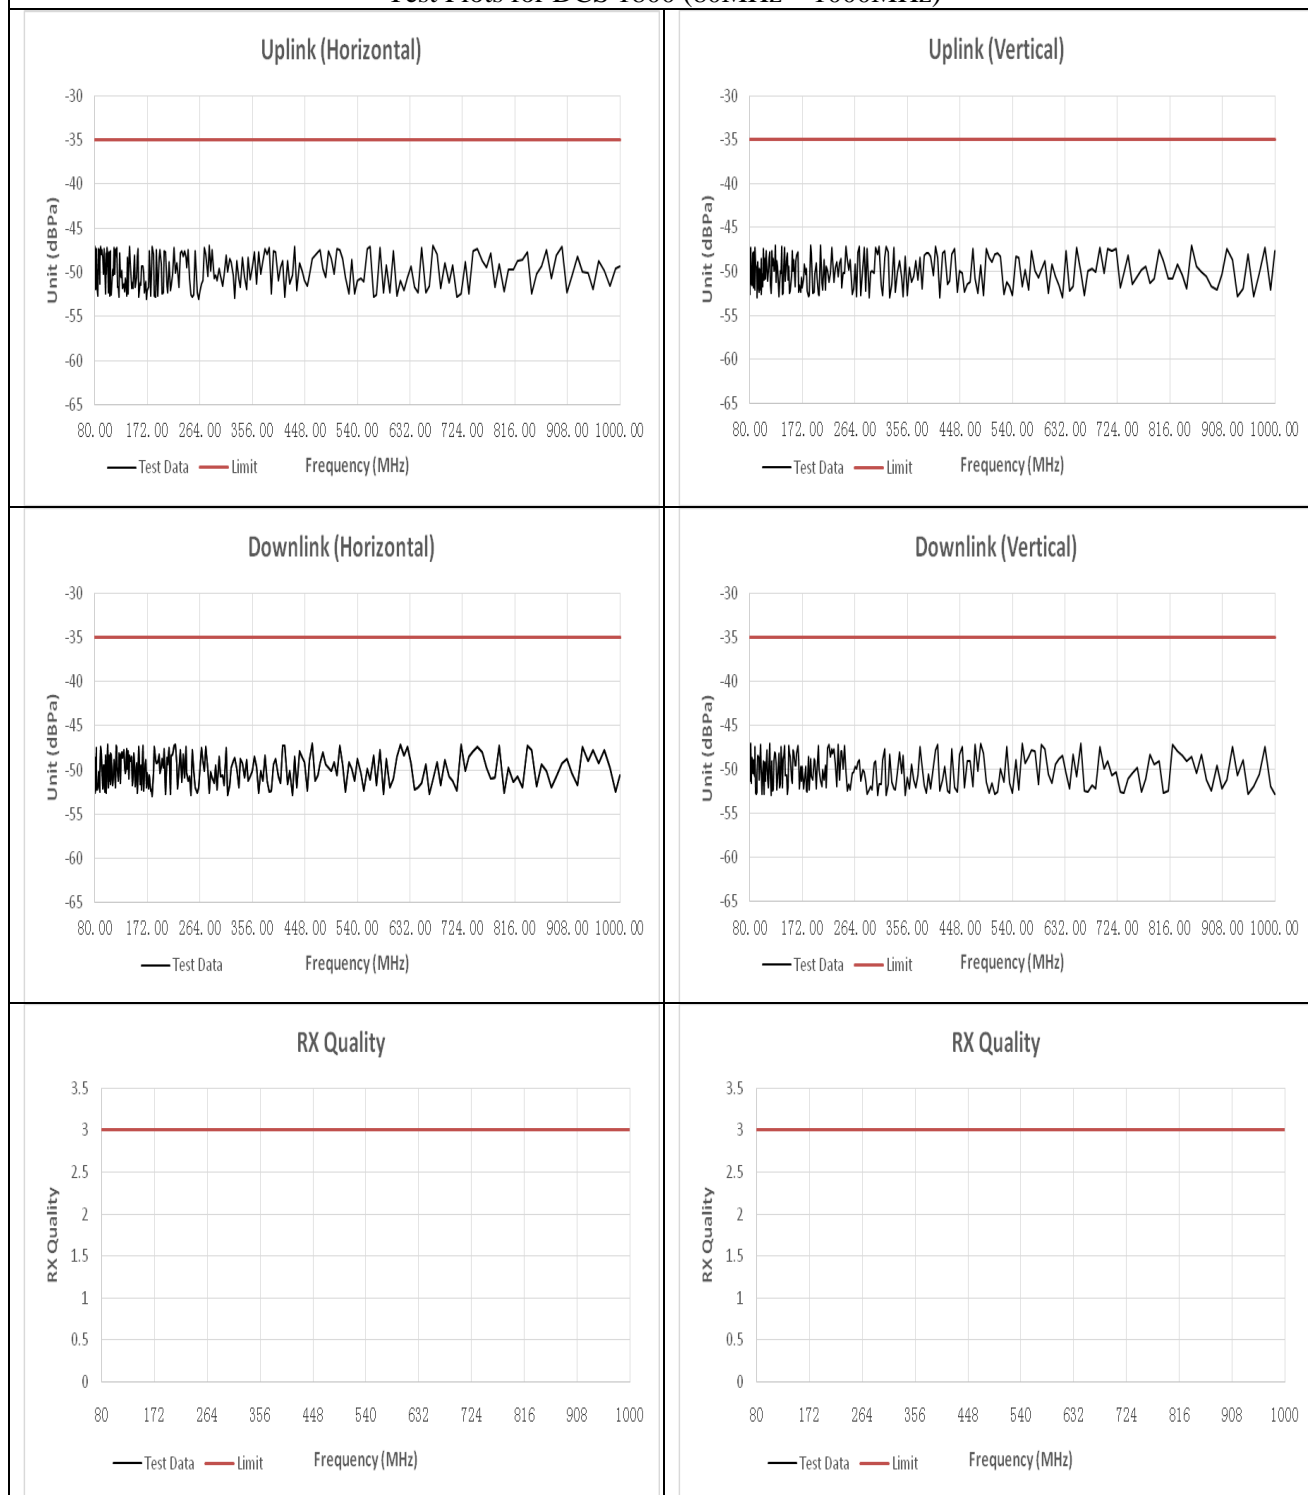




Test Plots for DCS 1800 (1GHz ~ 6GHz)

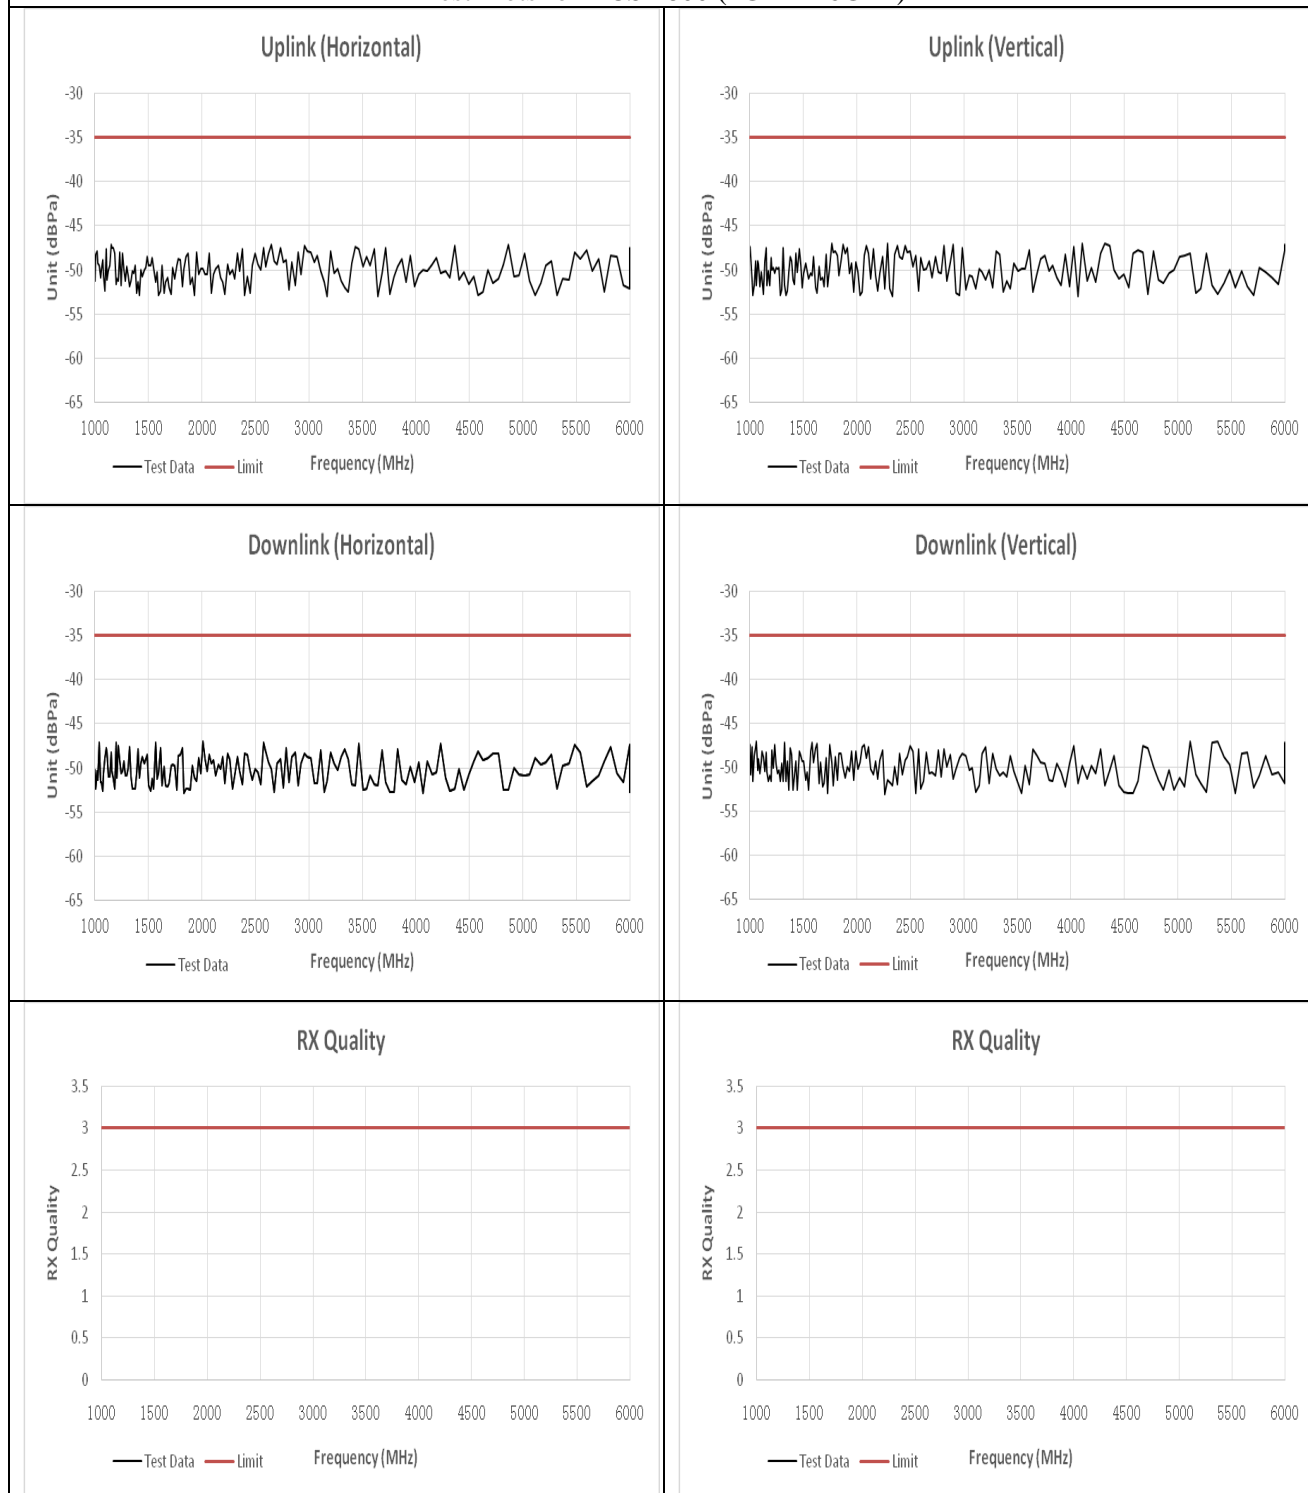




Test Plots for WCDMA Band I (80MHz ~ 1000MHz)

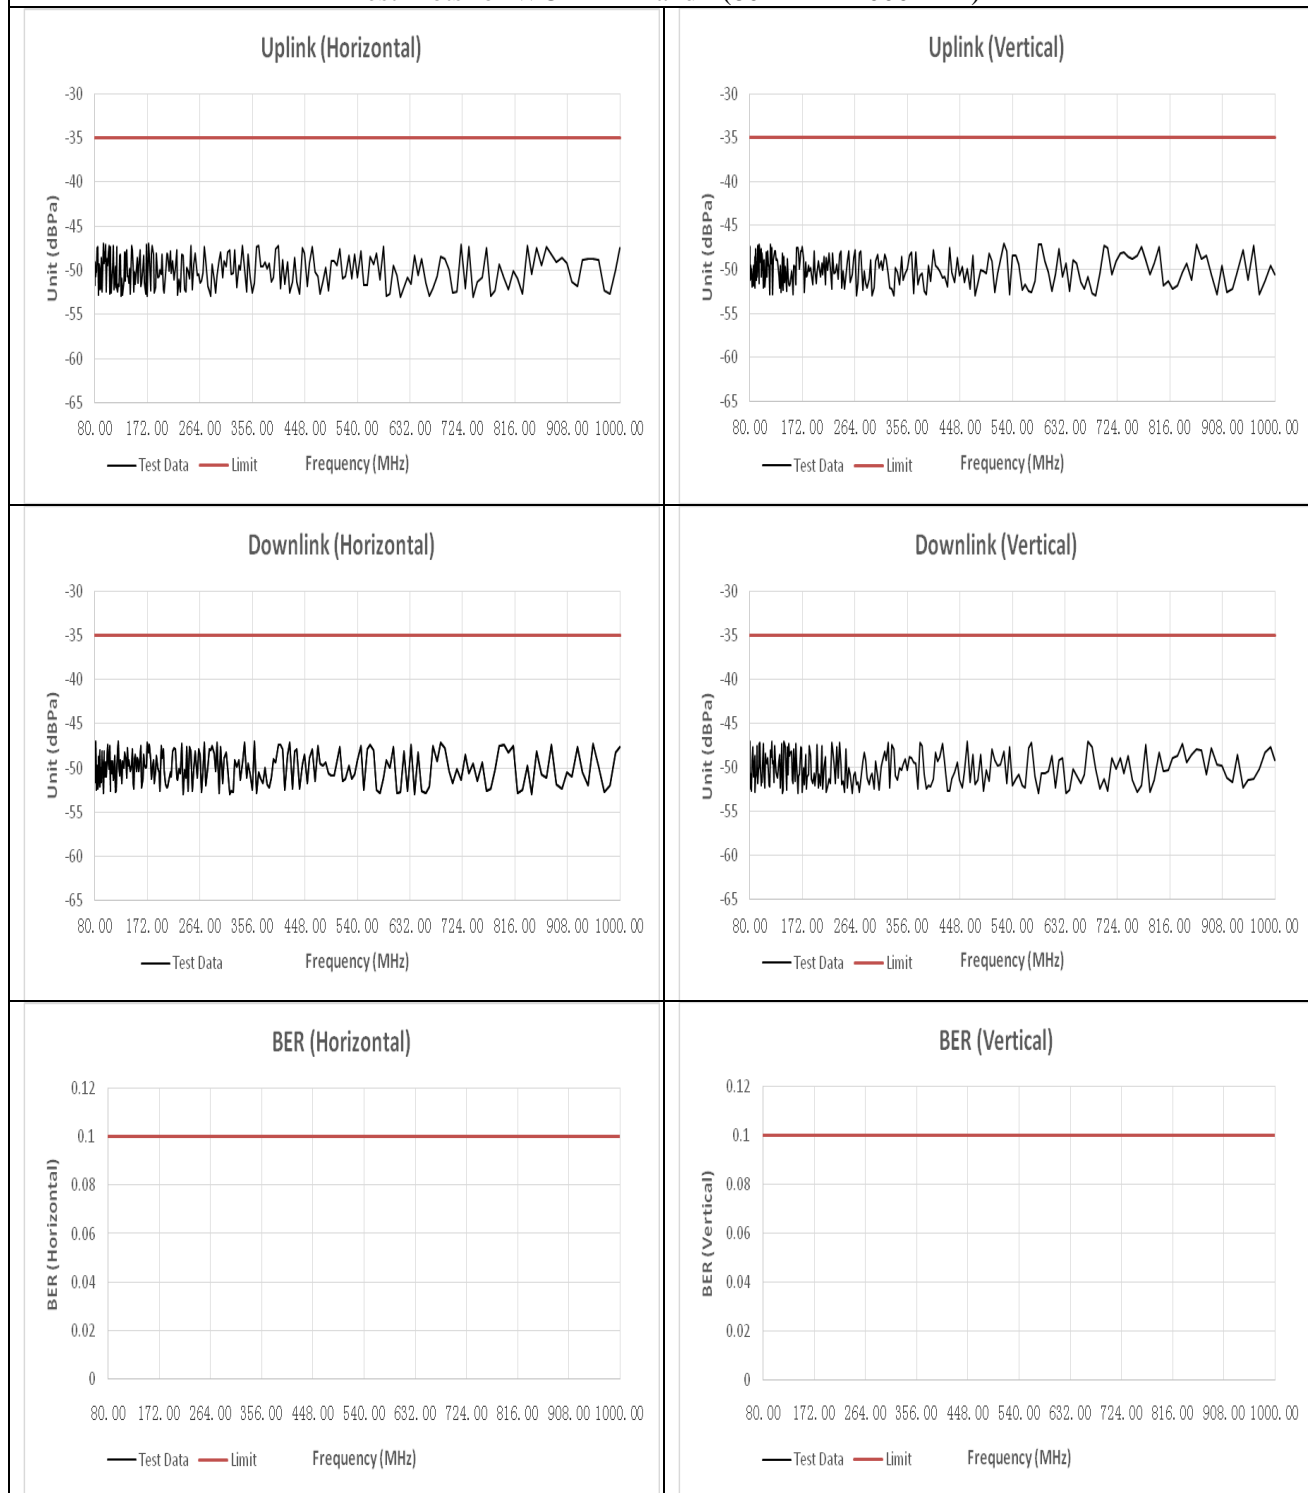




Test Plots for WCDMA Band I (1GHz ~ 6GHz)

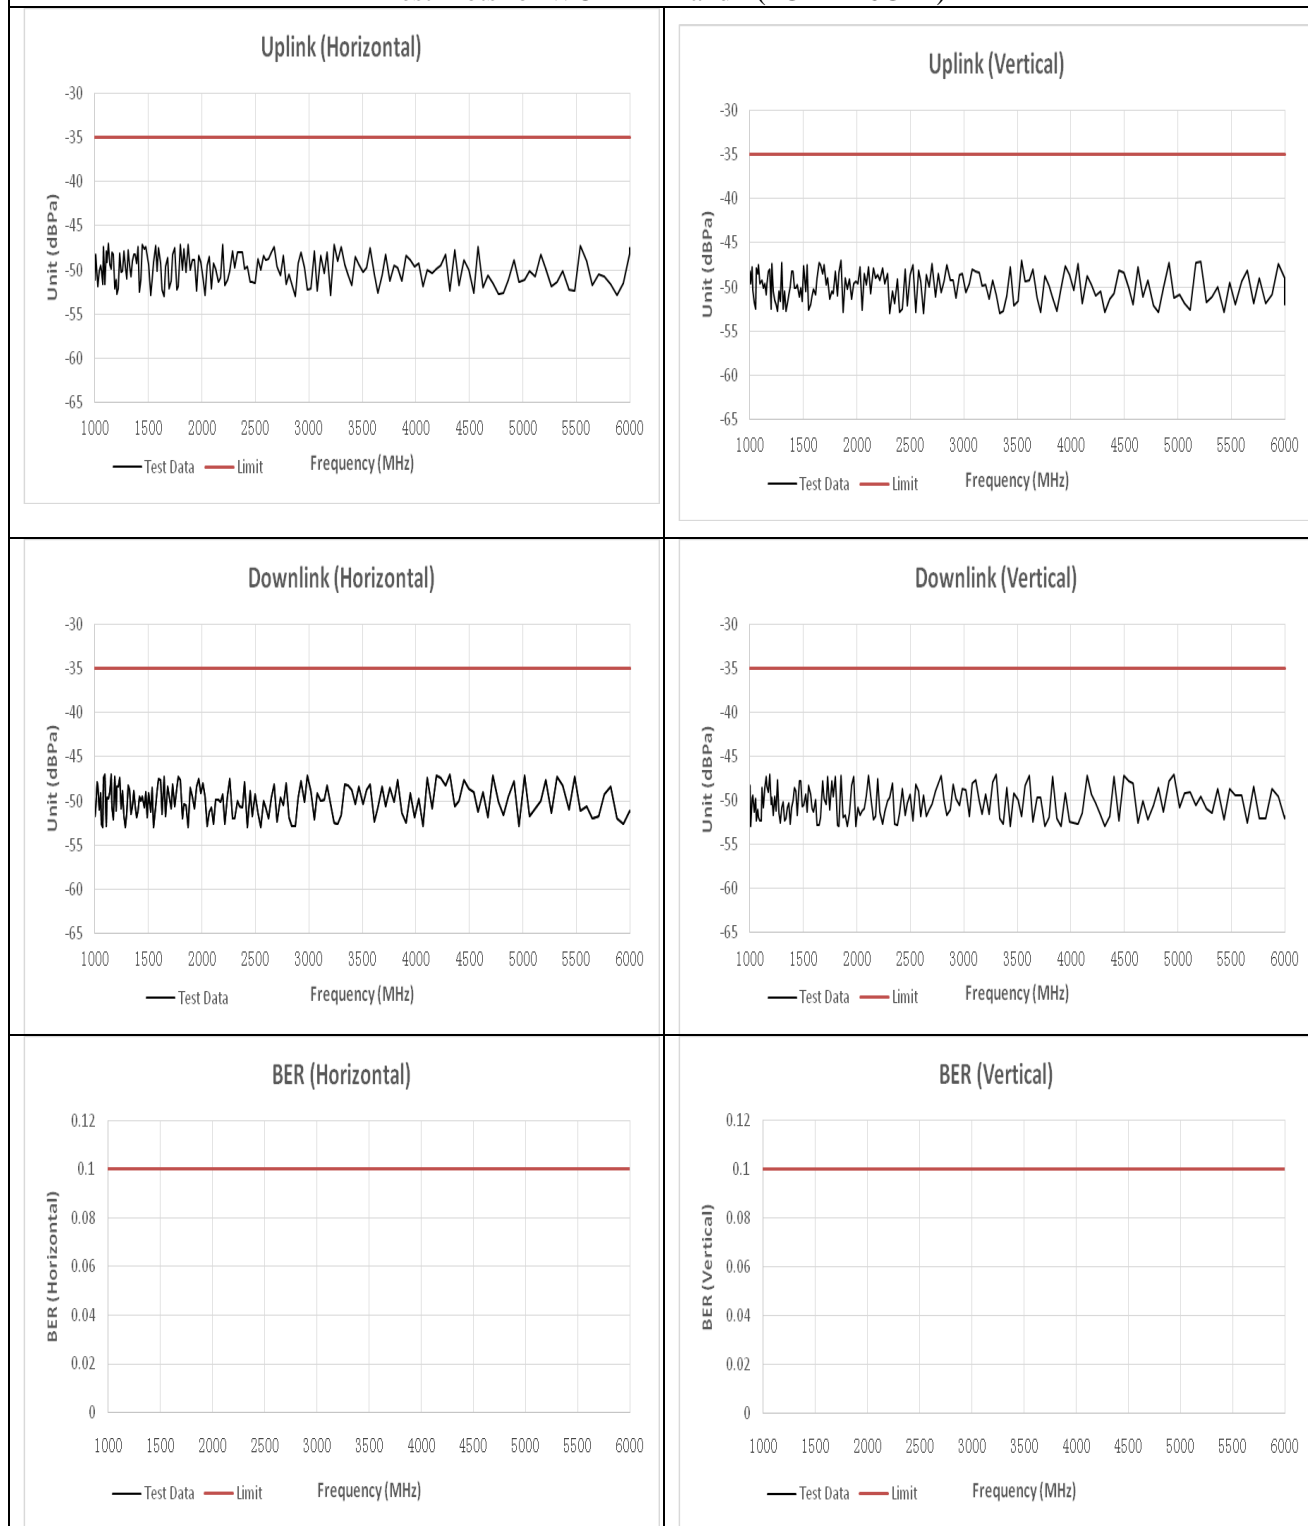




Test Plots for WCDMA Band VIII (80MHz ~ 1000MHz)

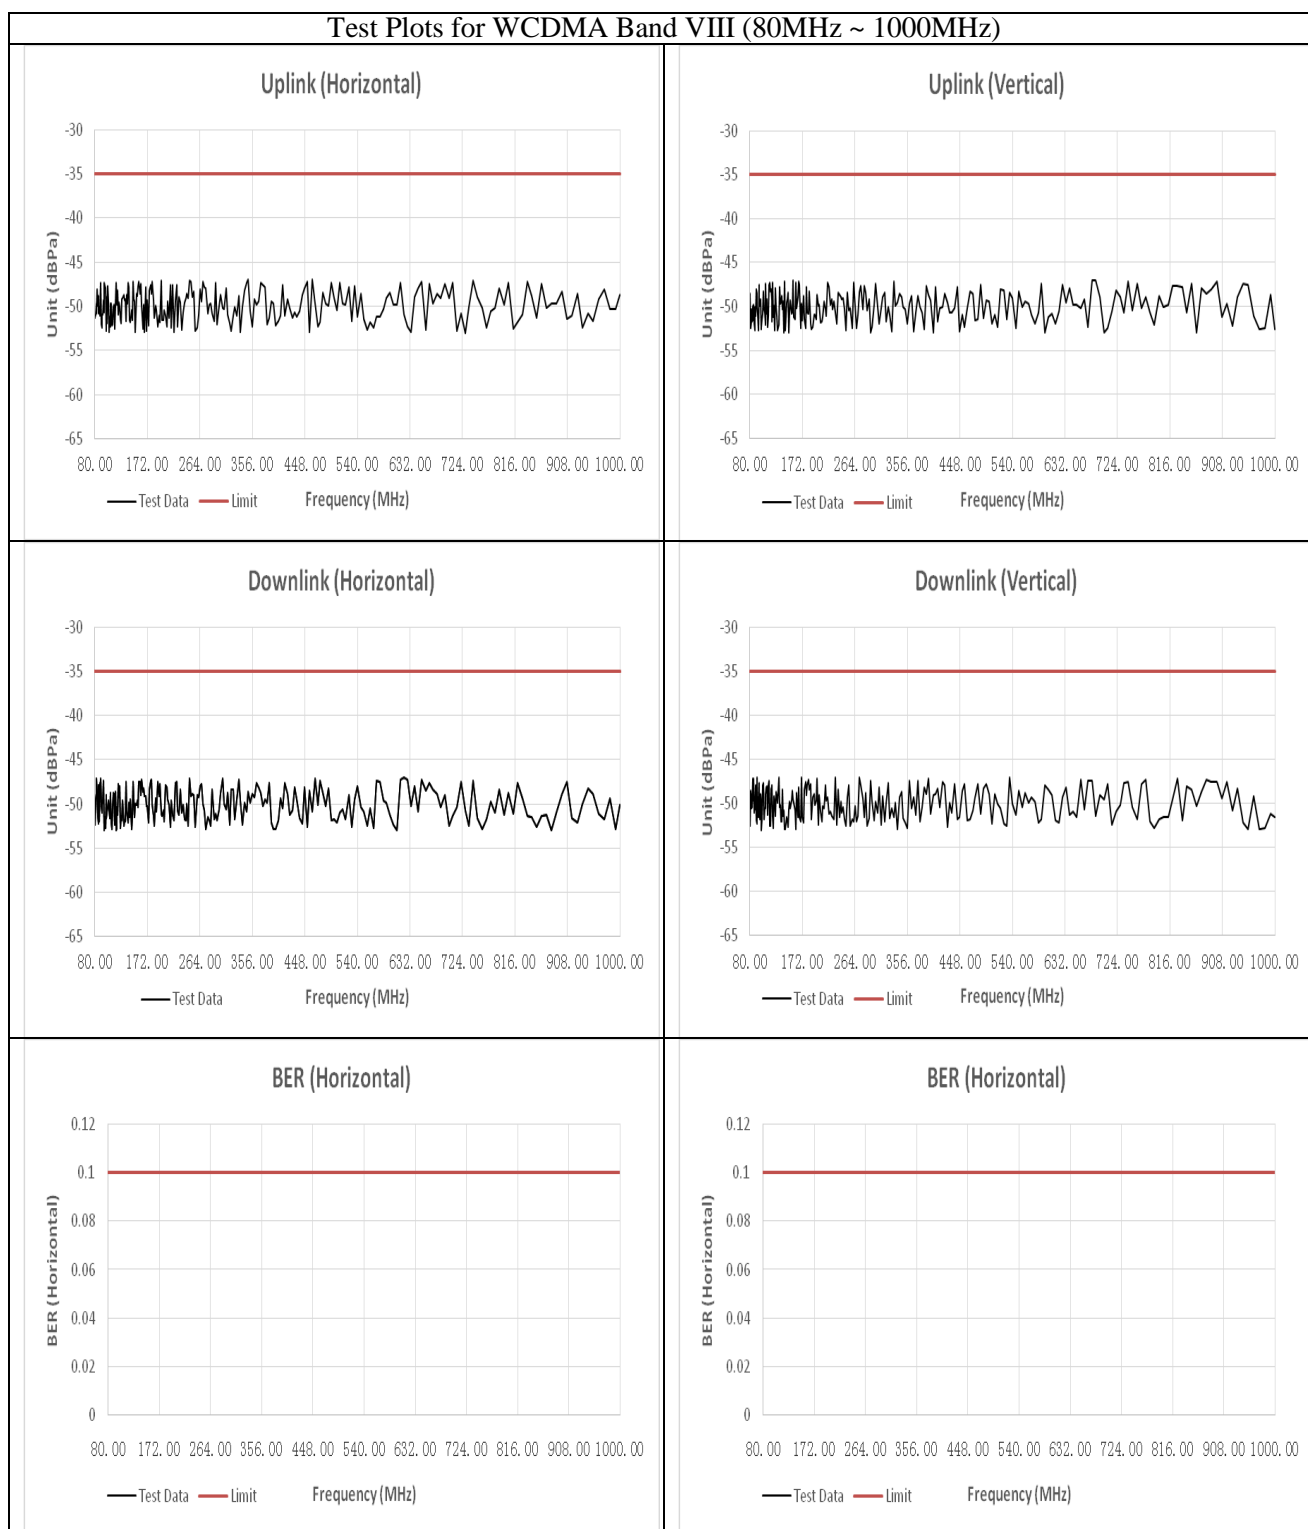



Test Plots for WCDMA Band VIII (1GHz ~ 6GHz)

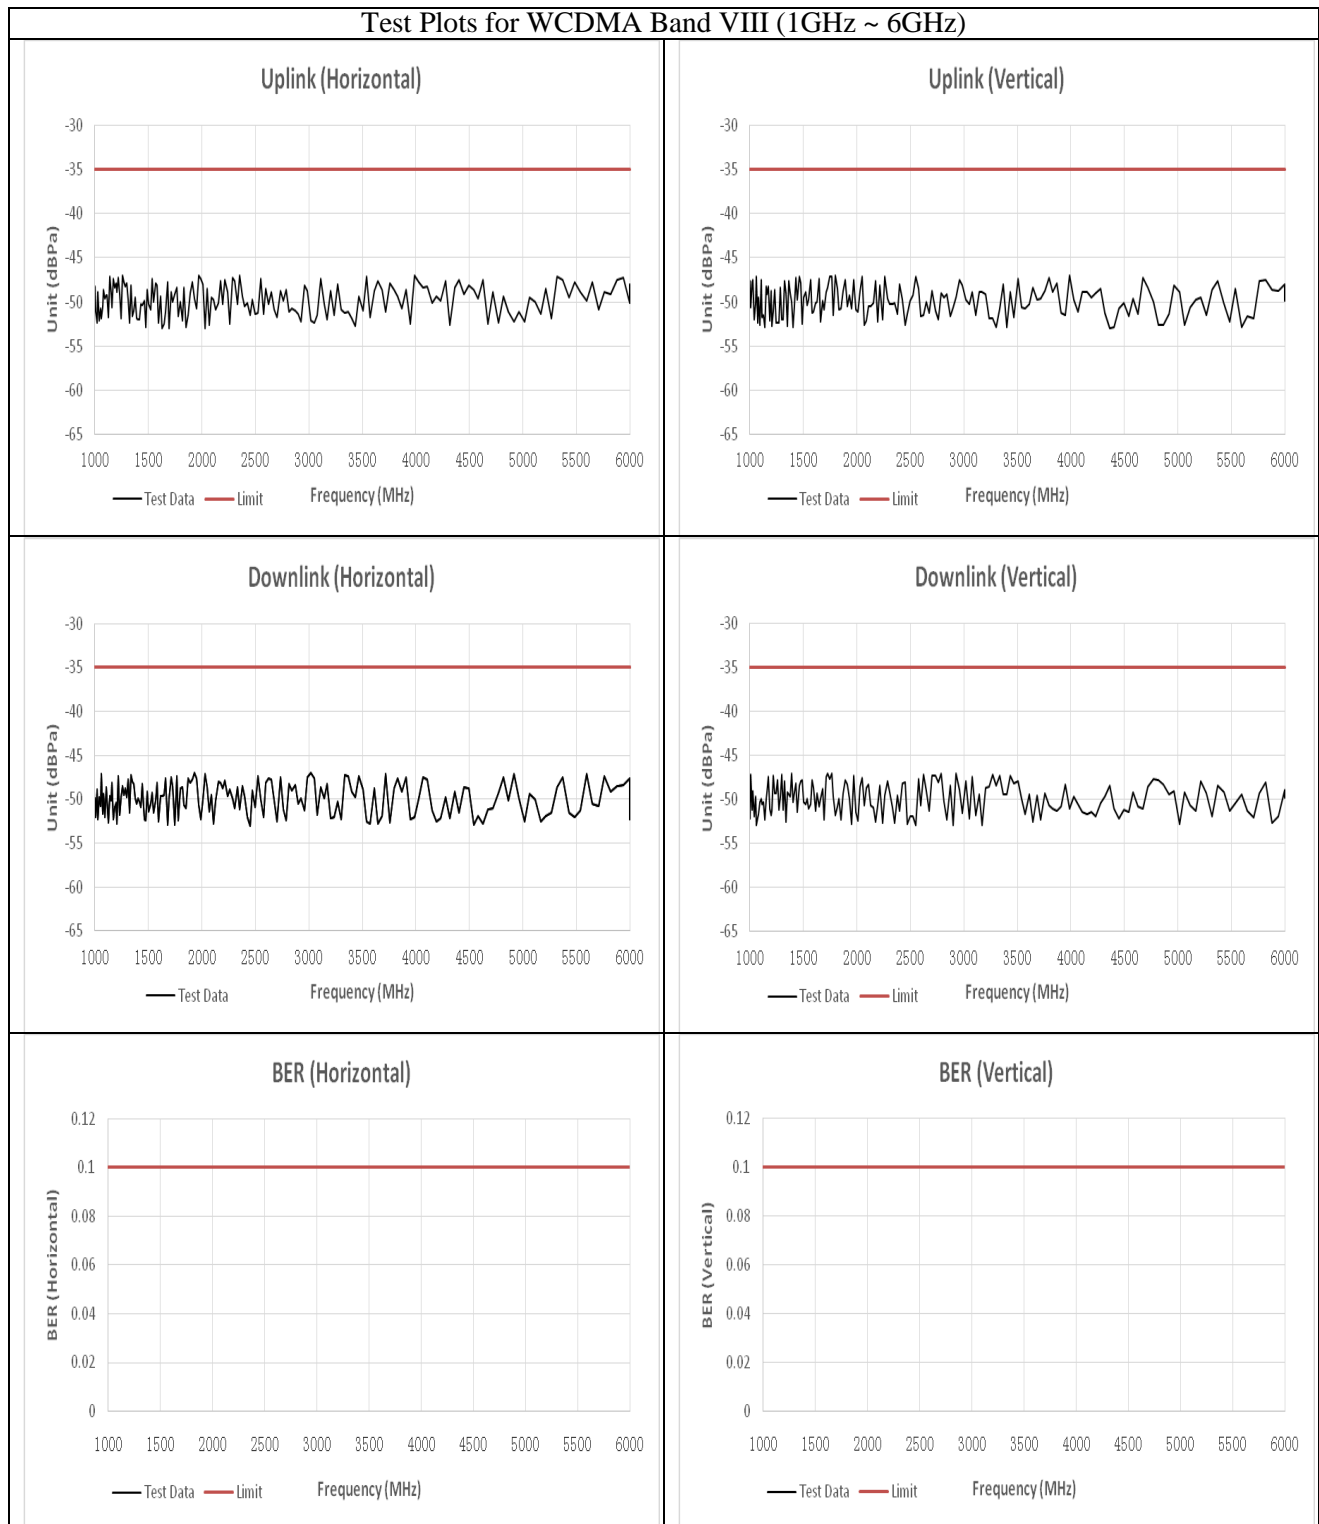

Note: The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

During the test, the Maximum Bit Error Ratio was less than 0.001

During the test, the Maximum Block Error Ratio was less than 0.01

For E-UTRA Band 1/3/7/8/20 (In the data transfer mode), the throughput is $\geq 95\%$ of the maximum throughput of the reference measurement channel as specified in annex C in TS 136 101 [13] with parameters specified in tables 7.3.1-1 and 7.3.1-2 in TS 136 101 [13] during the test sequence.



A.7 Electrostatic Discharge

Electrostatic Discharge Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-2 <input checked="" type="checkbox"/> EN 61000-4-2		
Applicant	OAXIS ASIA PTE LTD		
EUT	myFirst Fone R1s, S11	Temperature	23.5℃
M/N	KW1305, G4K1	Humidity	52.3%
Criterion	B	Pressure	1021mbar
Test Mode	TM1-TM20	Test Engineer	Li Huan
TEST RESULT OF MS & WIFI & BLUETOOTH			
Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TT, TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TT, TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TT, TR	Pass
TEST RESULT OF GPS			
Test Voltage	Coupling	Observation	Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge	TR	Pass
±2KV, ±4kV, ±8kV	Air Discharge	TR	Pass
±2KV, ±4kV	Indirect Discharge HCP	TR	Pass
±2KV, ±4kV	Indirect Discharge VCP	TR	Pass
TEST RESULT OF TM19-TM20			
Test Voltage	Coupling		Result (Pass/Fail)
±2KV, ±4kV	Contact Discharge		Pass
±2KV, ±4kV, ±8kV	Air Discharge		Pass
±2KV, ±4kV	Indirect Discharge HCP		Pass
±2KV, ±4kV	Indirect Discharge VCP		Pass
Note: The EUT performance complied with performance criteria for TT&TR to MS Function and there is no any degradation of performance and function.			



A.8 Electrical Fast Transient Immunity

Electrical Fast Transient/Burst Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-4 <input checked="" type="checkbox"/> EN 61000-4-4		
Applicant	OAXIS ASIA PTE LTD		
EUT	myFirst Fone R1s, S11	Temperature	23.4℃
M/N	KW1305, G4K1	Humidity	52.3%
Test Mode	TM1-TM20	Criterion	B
Test Engineer	Li Huan		

TEST RESULT OF MS & WIFI & BLUETOOTH				
Line	Test Voltage	Polarity	Observation	Result (Pass/Fail)
L	1KV	+/-	TT, TR	Pass
N	1KV	+/-	TT, TR	Pass
L-N	1KV	+/-	TT, TR	Pass
TEST RESULT OF GPS				
Line	Test Voltage	Polarity	Observation	Result (Pass/Fail)
L	1KV	+/-	TR	Pass
N	1KV	+/-	TR	Pass
L-N	1KV	+/-	TR	Pass
TEST RESULT OF TM19-TM20				
Line	Test Voltage	Polarity	Result (Pass/Fail)	
L	1KV	+/-	Pass	
N	1KV	+/-	Pass	
L-N	1KV	+/-	Pass	



A.9 RF Common Mode

Injected Currents Susceptibility Test Results

Standard	<input type="checkbox"/> IEC 61000-4-6 <input checked="" type="checkbox"/> EN 61000-4-6		
Applicant	OAXIS ASIA PTE LTD		
EUT	myFirst Fone R1s, S11	Temperature	24.4℃
M/N	KW1305, G4K1	Humidity	53.5%
Test Mode	TM1-TM20	Criterion	A
Test Engineer	Li Huan		

TEST RESULT OF MS (GSM & WCDMA & LTE)

Frequency Range (MHz)	Strength (Unmodulated)	Injected Position	Observation	Result (Pass/Fail)
0.15 ~ 10	3V	AC Mains	CT, CR	Pass
10 ~ 30	3V to 1V			
30 ~ 80	1V			

TEST RESULT OF WIFI & BLUETOOTH

Frequency Range (MHz)	Strength (Unmodulated)	Injected Position	Observation	Result (Pass/Fail)
0.15 ~ 10	3V	AC Mains	CT, CR	Pass
10 ~ 30	3V to 1V			
30 ~ 80	1V			

TEST RESULT OF TM19-TM20

Frequency Range (MHz)	Strength (Unmodulated)	Injected Position	Result (Pass/Fail)
0.15 ~ 10	3V	AC Mains	Pass
10 ~ 30	3V to 1V		
30 ~ 80	1V		

Remark:

1. Modulation Signal:1kHz 80% AM


2. Measurement Equipment :

Simulator: CIT-10 (FRANKONIA)


CDN : ☒CDN-M2 (FRANKONIA)☐CDN-M3 (FRANKONIA)




Test Plots for GSM 900

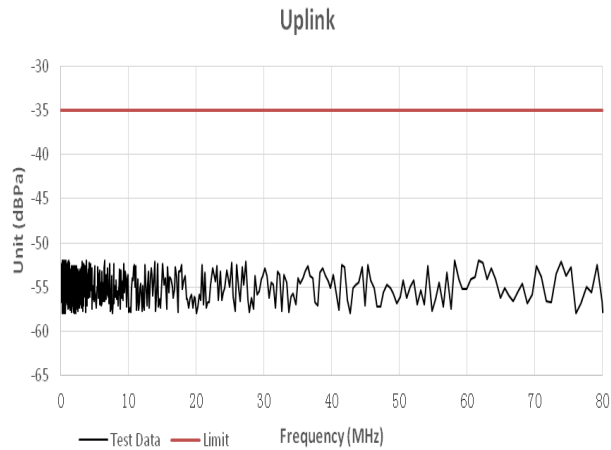


Test Plots for DCS 1800

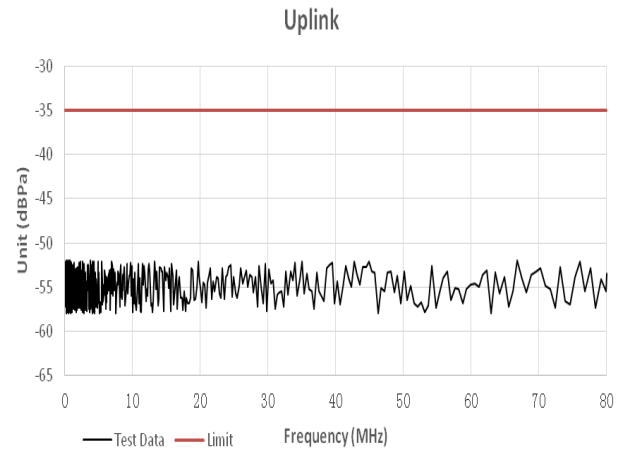


Downlink

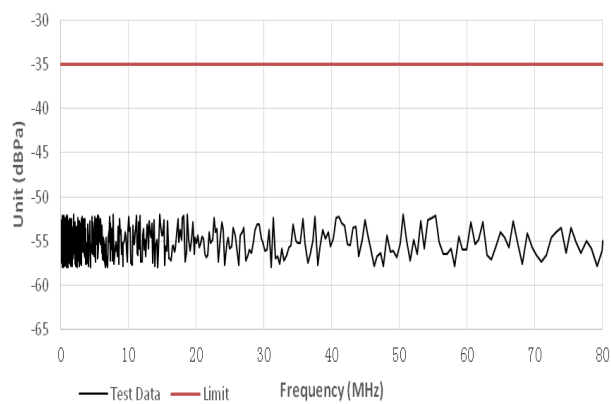


Downlink

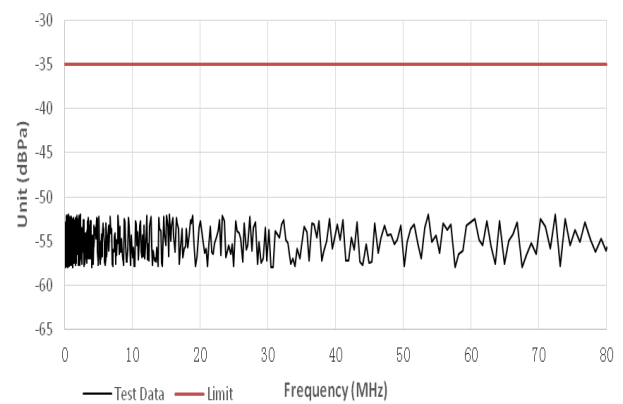


RX Quality

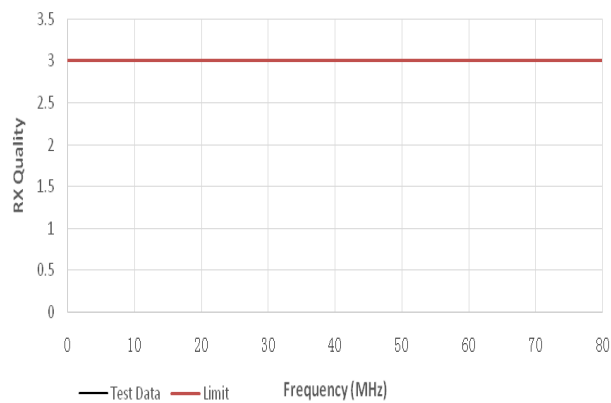

RX Quality

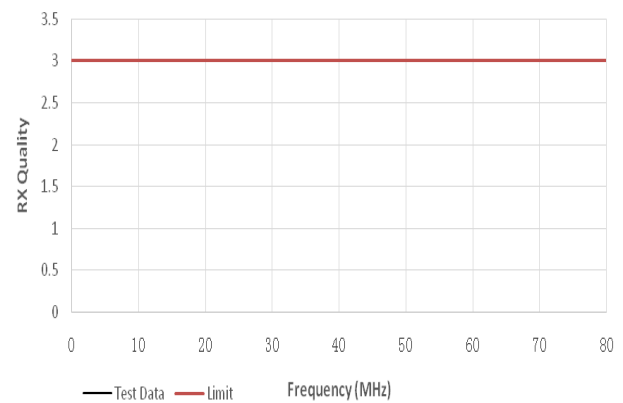

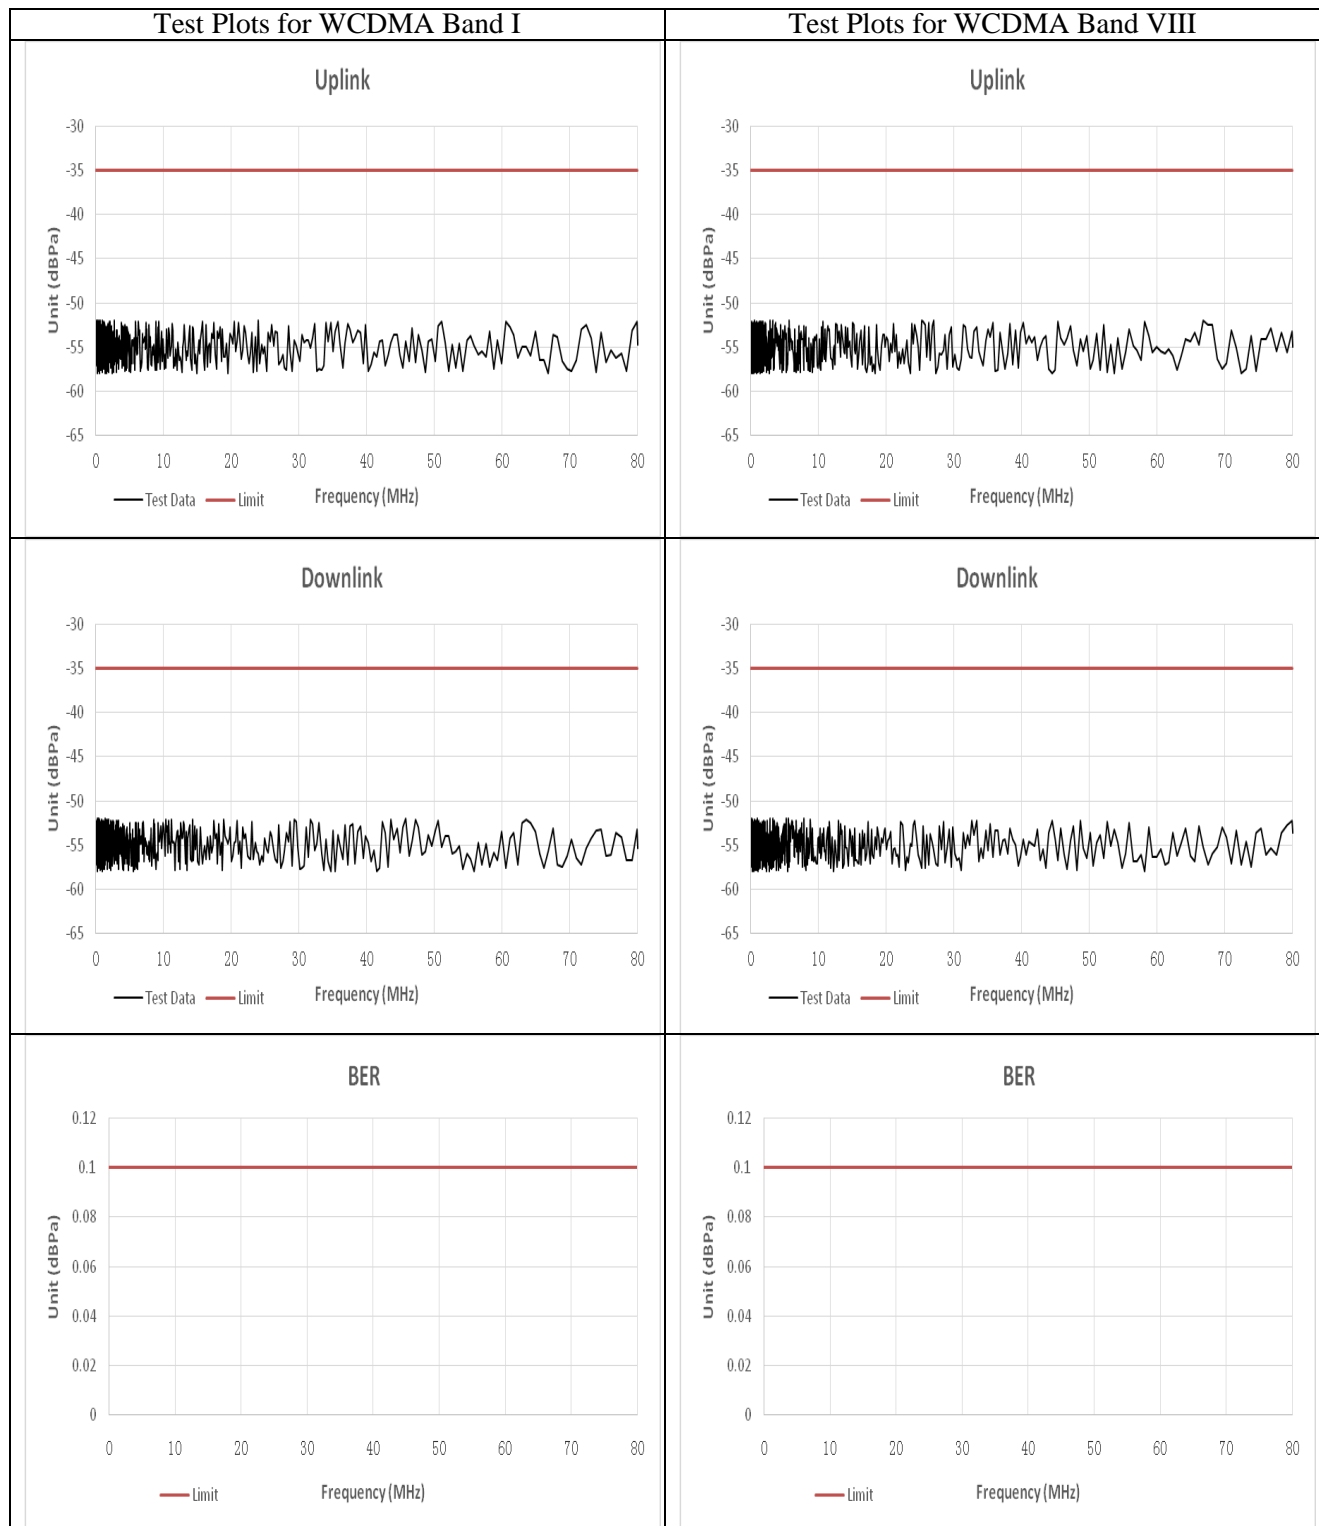

Note: The EUT performance complied with performance criteria for CT&CR to MS Function and there is no any degradation of performance and function.

During the test, the Maximum Bit Error Ratio was less than 0.001

During the test, the Maximum Block Error Ratio was less than 0.01

For E-UTRA Band 1/3/7/8/20 (In the data transfer mode), the throughput is $\geq 95\%$ of the maximum throughput of the reference measurement channel as specified in annex C in TS 136 101 [13] with parameters specified in tables 7.3.1-1 and 7.3.1-2 in TS 136 101 [13] during the test sequence.

**A.10 Surges, Line to Line and Line to Ground**

Surge Immunity Test Result			
Standard	<input type="checkbox"/> IEC 61000-4-5 <input checked="" type="checkbox"/> EN 61000-4-5		
Applicant	OAXIS ASIA PTE LTD		
EUT	myFirst Fone R1s, S11	Temperature	23.3°C
M/N	KW1305, G4K1	Humidity	52.3%
Test Mode	TM1-TM20	Criterion	B
Test Engineer	Li Huan		

TEST RESULT OF MS & WIFI & BLUETOOTH						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Observation	Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0	TT, TR	Pass
	-	0°, 90°, 180°, 270°	5	1.0	TT, TR	Pass
TEST RESULT OF GPS						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Observation	Result (Pass/Fail)
L-N	+	0°, 90°, 180°, 270°	5	1.0	TR	Pass
	-	0°, 90°, 180°, 270°	5	1.0	TR	Pass
TEST RESULT OF TM19-TM20						
Location	Polarity	Phase Angle	Number of Pulse	Pulse Voltage (KV)	Result (Pass/Fail)	
L-N	+	0°, 90°, 180°, 270°	5	1.0	Pass	
	-	0°, 90°, 180°, 270°	5	1.0	Pass	

**A.11 Voltage Dips/Interruptions Immunity Test**

Voltage Dips And Interruptions Test Results			
Standard	<input type="checkbox"/> IEC 61000-4-11 <input checked="" type="checkbox"/> EN 61000-4-11		
Applicant	OAXIS ASIA PTE LTD		
EUT	myFirst Fone R1s, S11	Temperature	23.6°C
M/N	KW1305, G4K1	Humidity	54.4%
Test Mode	TM1-TM20	Criterion	B&C
Test Engineer	Li Huan		

TEST RESULT OF MS & WIFI & BLUETOOTH				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Observation	Result (Pass/Fail)
0	100	0.5P	TT, TR	Pass
0	100	1P	TT, TR	Pass
70	30	25P	TT, TR	Pass
0	100	250P	TT, TR	Pass
TEST RESULT OF GPS				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Observation	Result (Pass/Fail)
0	100	0.5P	TR	Pass
0	100	1P	TR	Pass
70	30	25P	TR	Pass
0	100	250P	TR	Pass
TEST RESULT OF TM19-TM20				
Test Level % U _T	Voltage Dips & Short Interruptions % U _T	Duration (in periods)	Result (Pass/Fail)	
0	100	0.5P	Pass	
0	100	1P	Pass	
70	30	25P	Pass	
0	100	250P	Pass	