



Appendix E for BT Test Data

Product Name: myFirst Fone R1s、myFirst Fone R1c

Test Model: KW1305

Environmental Conditions

Temperature:	23.6° C
Relative Humidity:	54.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Taylor Hu
Supervised by:	Nick Peng





E.1 RF Output Power

Condition	Mode	Frequency (MHz)	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	2.54	20	Pass
NVNT	1-DH5	2480	2.67	20	Pass
NVNT	2-DH5	2402	0.88	20	Pass
NVNT	2-DH5	2480	0.88	20	Pass

Condition	Mode	Frequency (MHz)	Max EIRP (dBm)	Limit (dBm)	Verdict
NVLT	1-DH5	2402	2.47	20	Pass
NVLT	1-DH5	2480	2.66	20	Pass
NVLT	2-DH5	2402	0.87	20	Pass
NVLT	2-DH5	2480	0.84	20	Pass

Condition	Mode	Frequency (MHz)	Max EIRP (dBm)	Limit (dBm)	Verdict
NVHT	1-DH5	2402	2.41	20	Pass
NVHT	1-DH5	2480	2.61	20	Pass
NVHT	2-DH5	2402	0.80	20	Pass
NVHT	2-DH5	2480	0.80	20	Pass

***Note: 20 bursts had been captured for power measurement.







E.2 Accumulated Transmit Time

Condition	Mode	Frequency (MHz)	Accumulated Transmit Time (ms)	Limit (ms)	Sweep Time (ms)	Burst Number	Verdict
NVNT	1-DH5	2402	348	400	31600	120	Pass
NVNT	1-DH5	2480	313.2	400	31600	108	Pass
NVNT	2-DH5	2402	332.75	400	31600	121	Pass
NVNT	2-DH5	2480	275	400	31600	100	Pass

Dwell NVNT 1-DH5 2402MHz

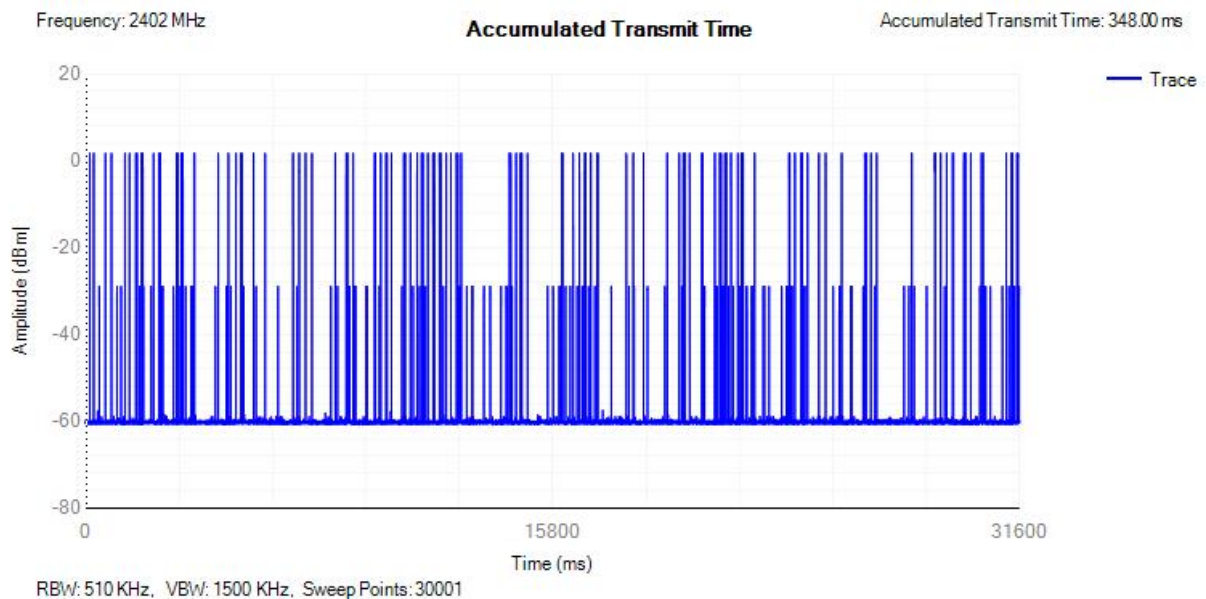


Dwell NVNT 1-DH5 2480MHz

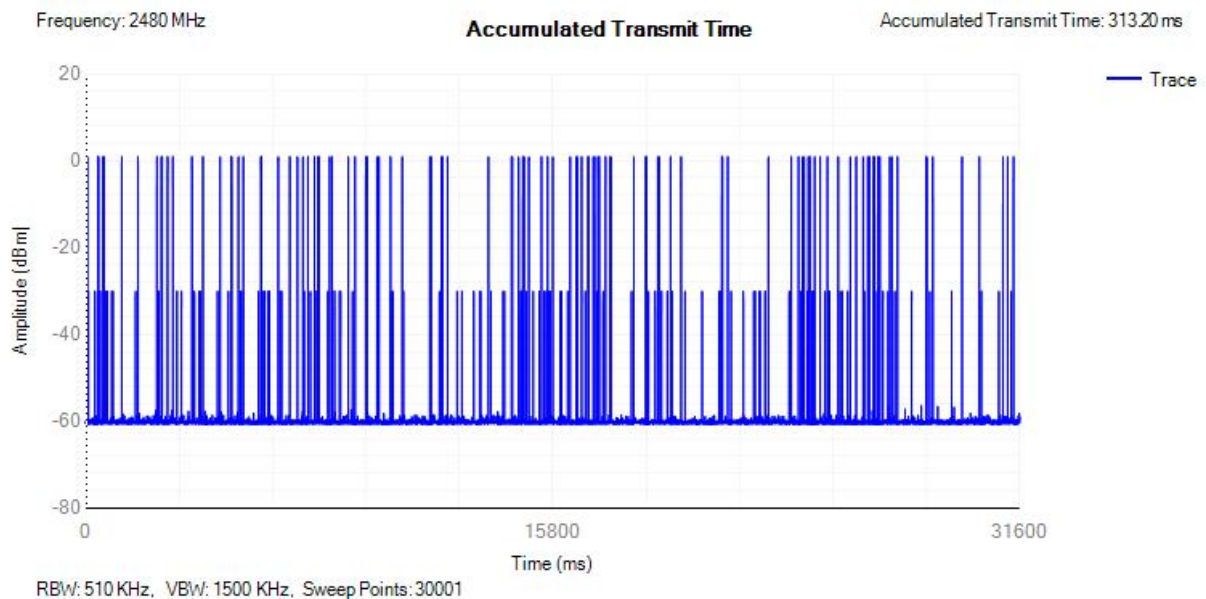




Dwell NVNT 2-DH5 2402MHz

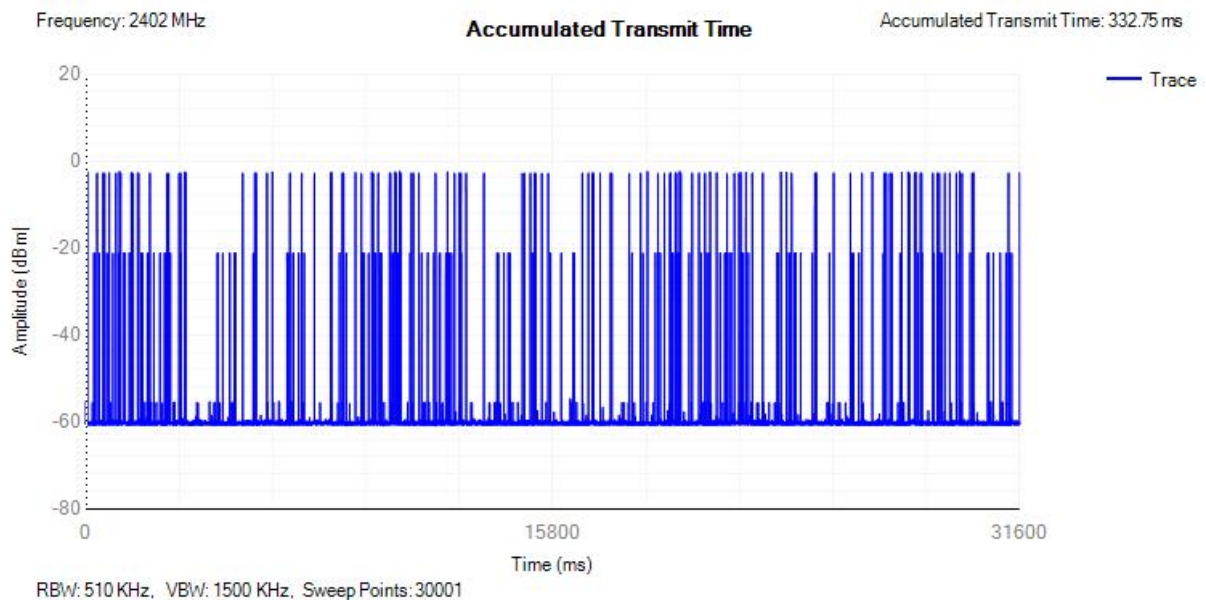

Dwell NVNT 2-DH5 2480MHz

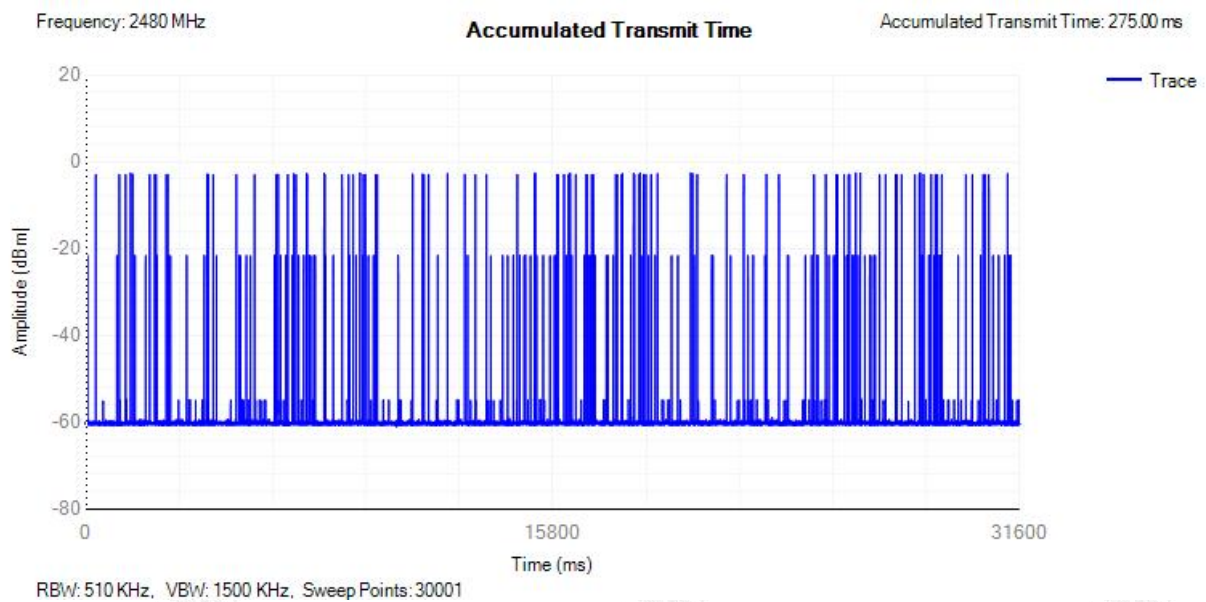





E.3 Frequency Occupation

Condition	Mode	Frequency (MHz)	Frequency Occupation (ms)	Limit (ms)	Sweep Time (ms)	Burst Number	Verdict
NVNT	1-DH5	2402	11.6	0	916.4	4	Pass
NVNT	1-DH5	2480	2.9	0	916.4	1	Pass
NVNT	2-DH5	2402	11	0	869	4	Pass
NVNT	2-DH5	2480	0	0	869	0	Pass

Freq. Occup. NVNT 1-DH5 2402MHz

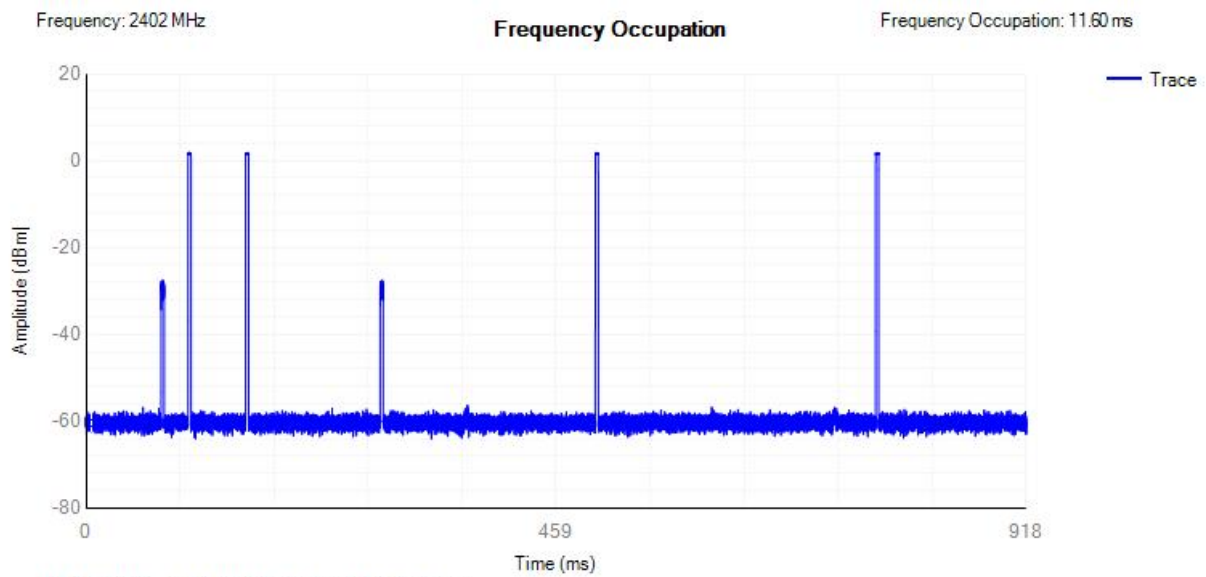


Freq. Occup. NVNT 1-DH5 2480MHz

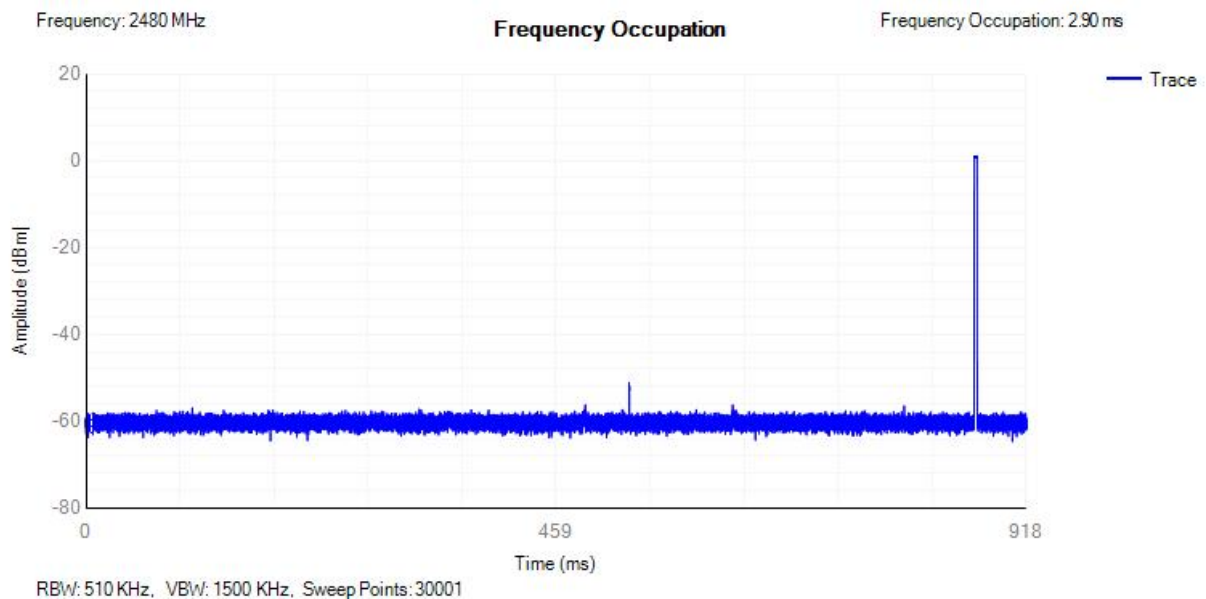




Freq. Occup. NVNT 2-DH5 2402MHz

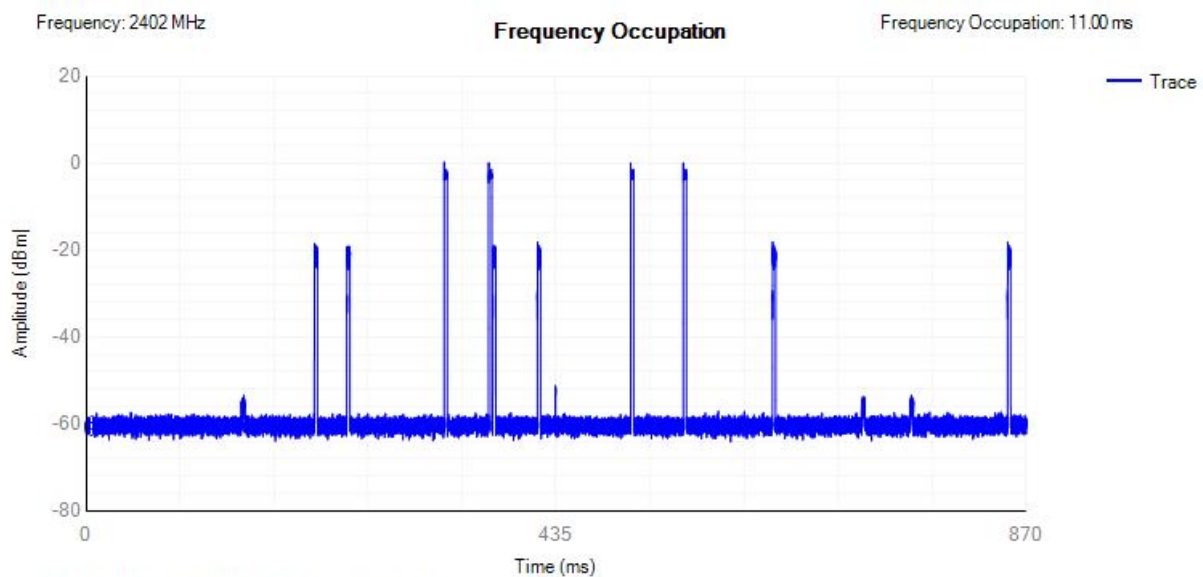

Freq. Occup. NVNT 2-DH5 2480MHz

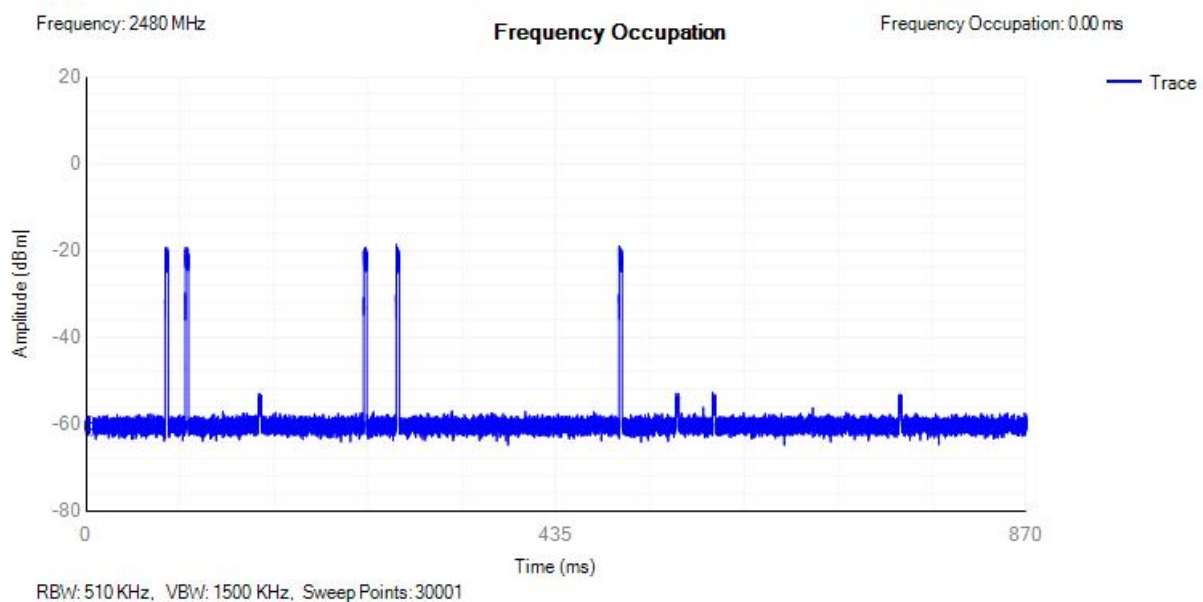





E.4 Hopping Sequence

Condition	Mode	Hopping Number	Limit	Band Allocation (%)	Limit Band Allocation (%)	Verdict
NVNT	1-DH5	79	15	95.38	70	Pass
NVNT	2-DH5	79	15	95.92	70	Pass

Hopping Seq. NVNT 1-DH5 2402MHz

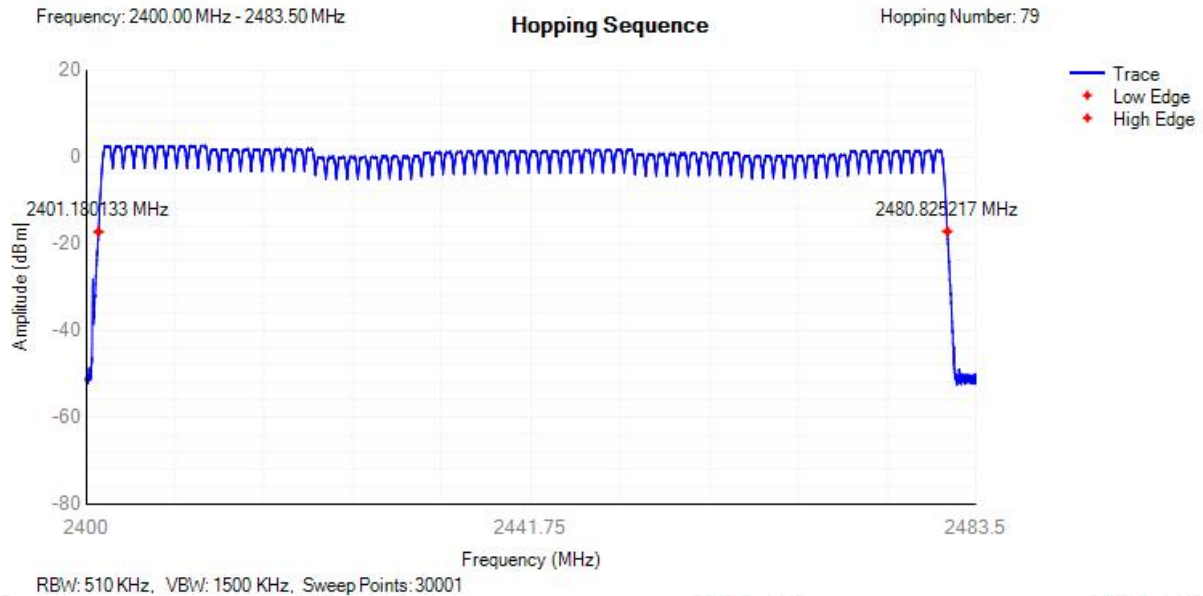

Hopping Seq. NVNT 2-DH5 2402MHz

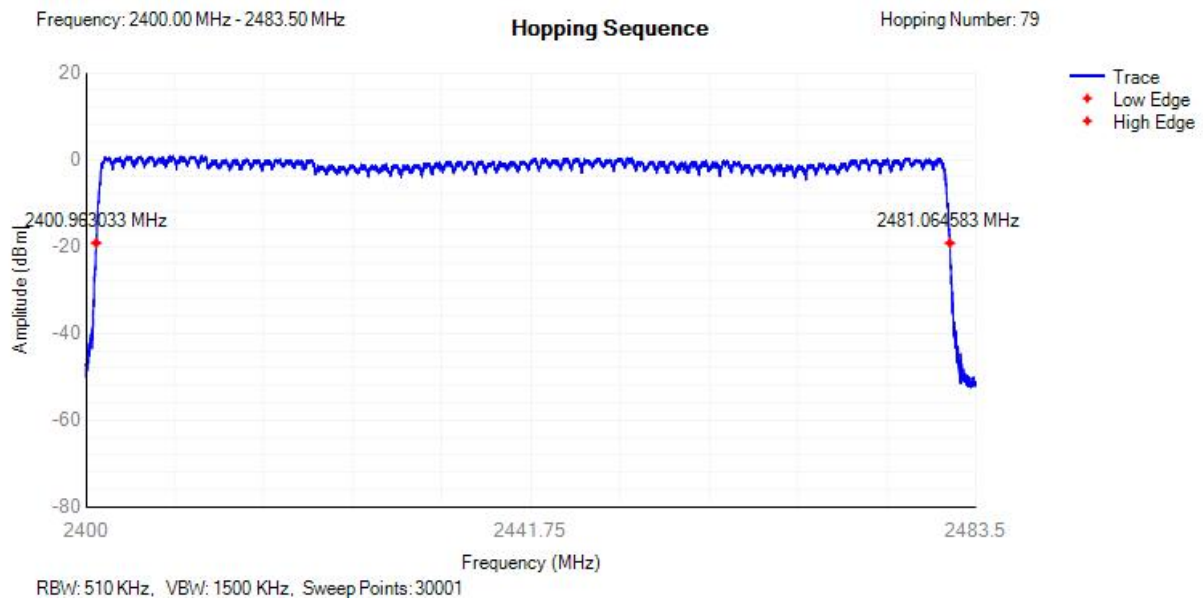





E.5 Hopping Frequency Separation

Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	2402.0101	2402.9602	0.95	0.1	Pass
NVNT	1-DH5	2479.0011	2480.0045	1	0.1	Pass
NVNT	2-DH5	2402.0515	2403.1633	1.11	0.1	Pass
NVNT	2-DH5	2479.0038	2480.0607	1.05	0.1	Pass

HFS NVNT 1-DH5 2402MHz

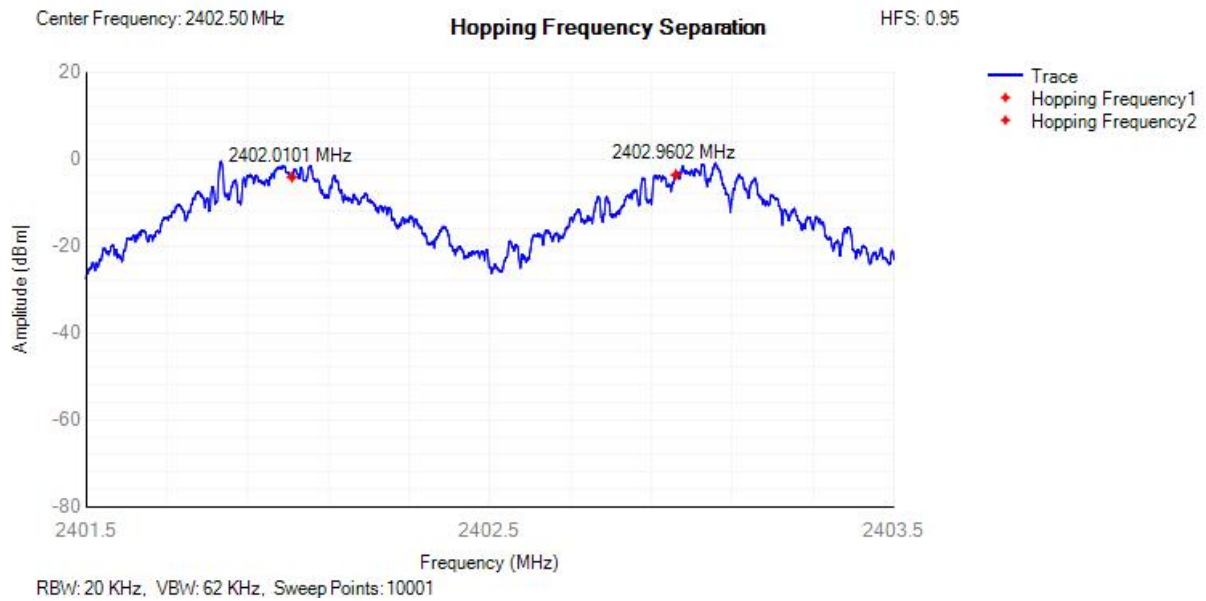


HFS NVNT 1-DH5 2480MHz

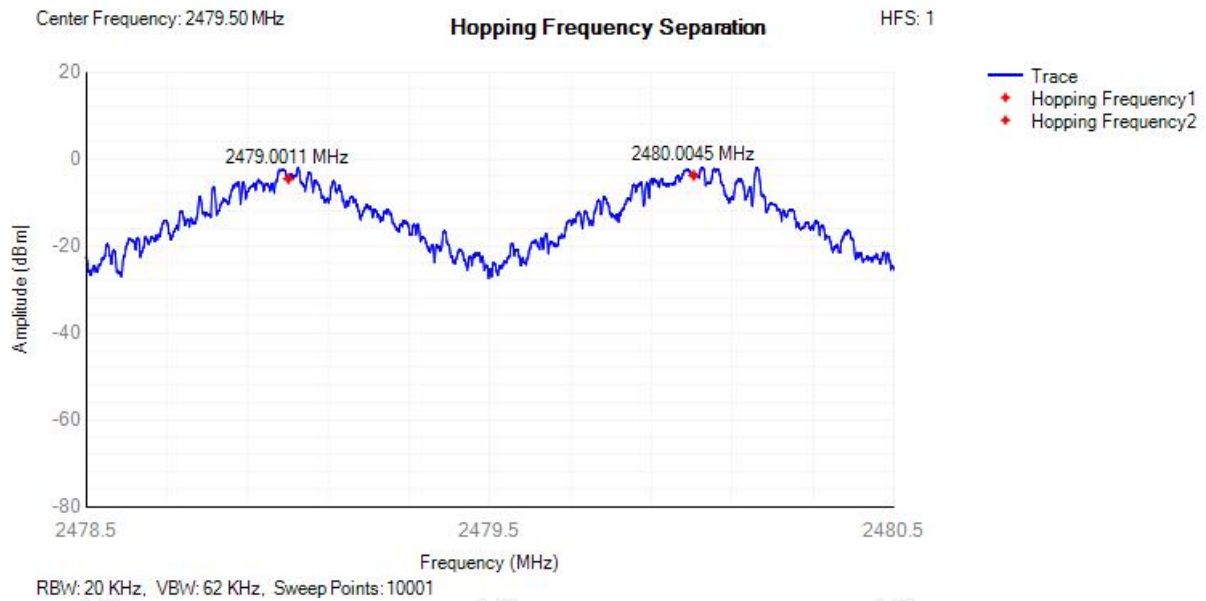




HFS NVNT 2-DH5 2402MHz

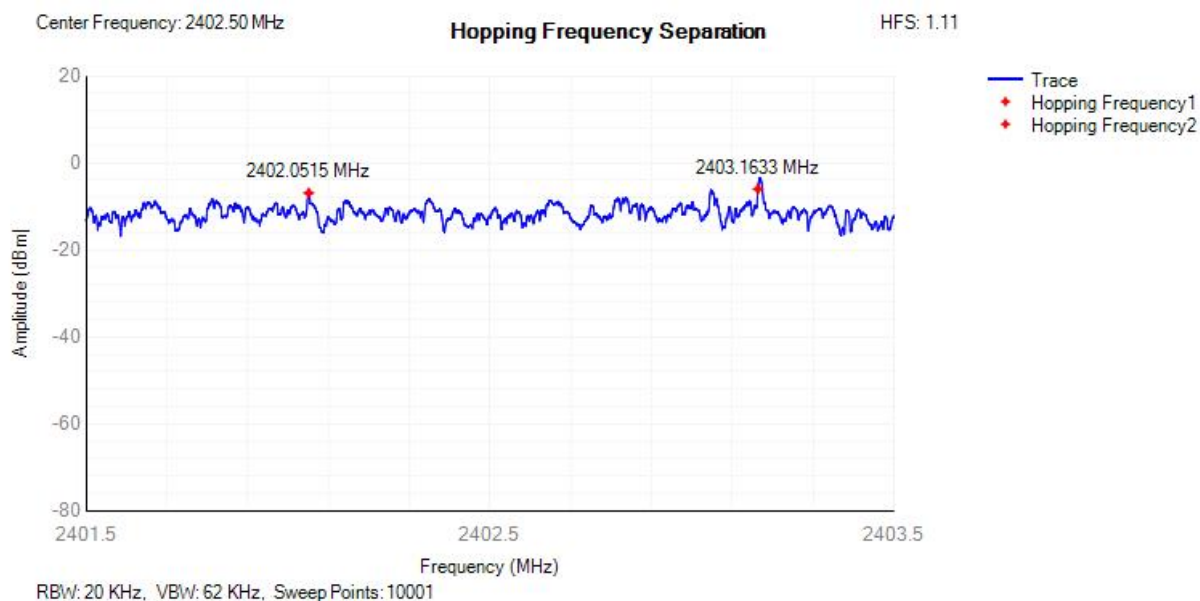

HFS NVNT 2-DH5 2480MHz

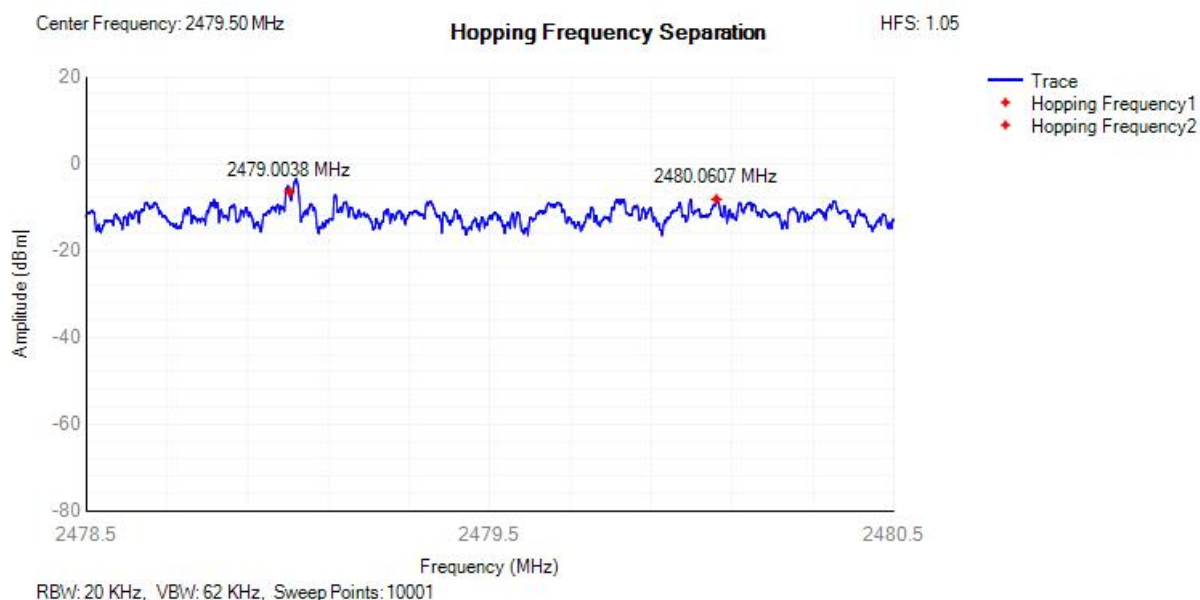




E.6 Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Edge (MHz)	Upper Edge (MHz)	Limit OBW (MHz)	Verdict
NVNT	1-DH5	2402	2401.997	0.858	2401.568	2402.426	2400 - 2483.5MHz	Pass
NVNT	1-DH5	2480	2479.997	0.861	2479.566	2480.427	2400 - 2483.5MHz	Pass
NVNT	2-DH5	2402	2401.998	1.179	2401.408	2402.587	2400 - 2483.5MHz	Pass
NVNT	2-DH5	2480	2479.998	1.178	2479.408	2480.587	2400 - 2483.5MHz	Pass

OBW NVNT 1-DH5 2402MHz

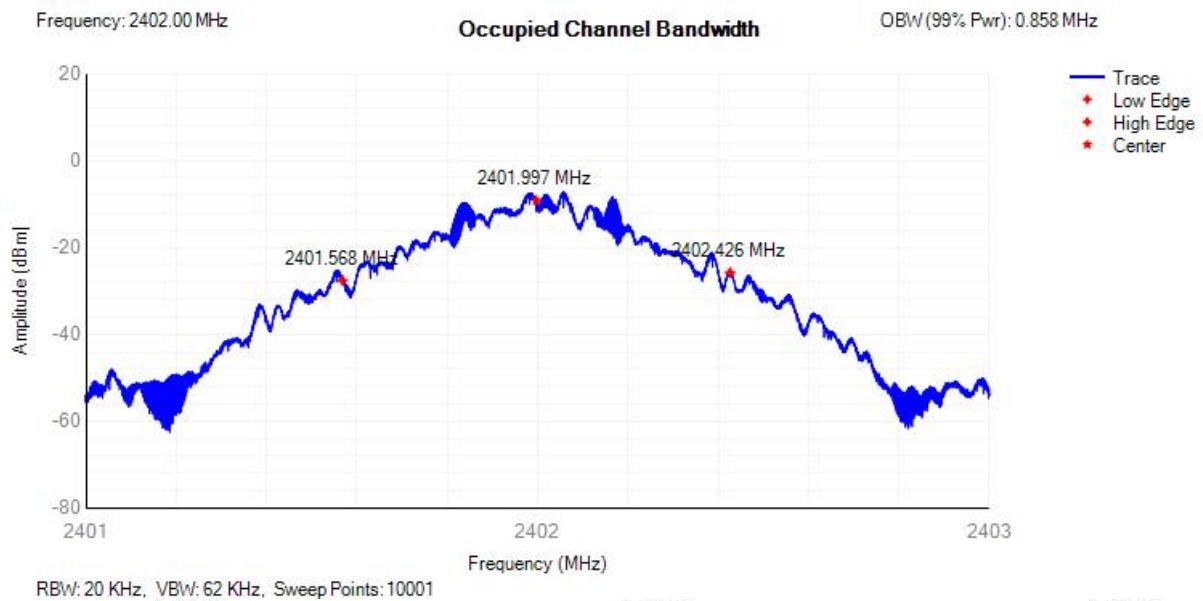




OBW NVNT 1-DH5 2480MHz

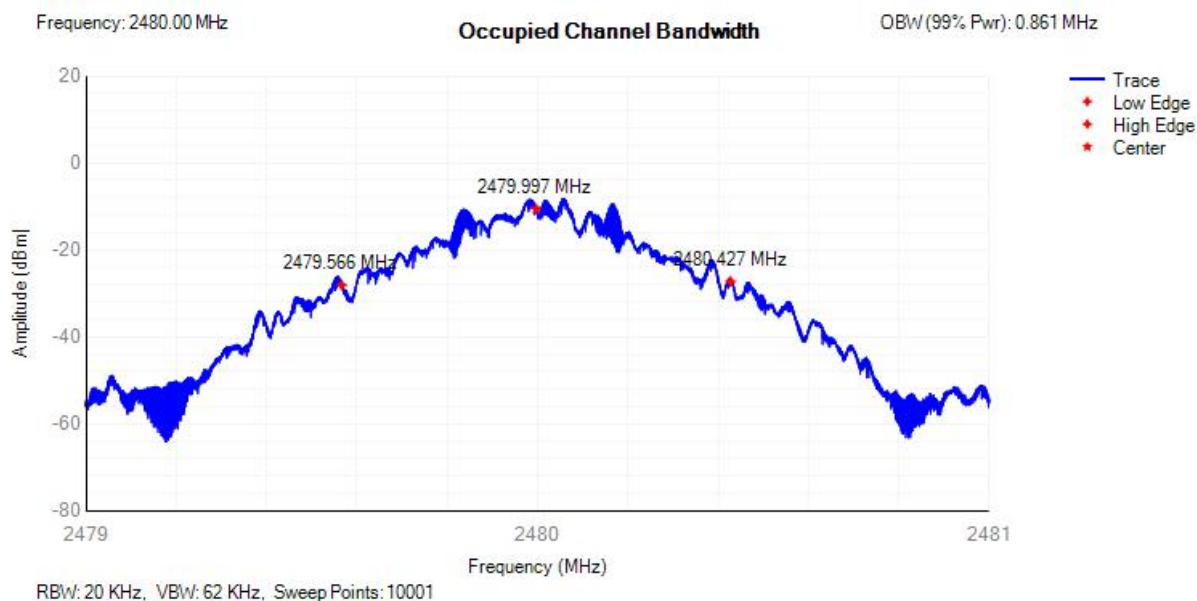


OBW NVNT 2-DH5 2402MHz

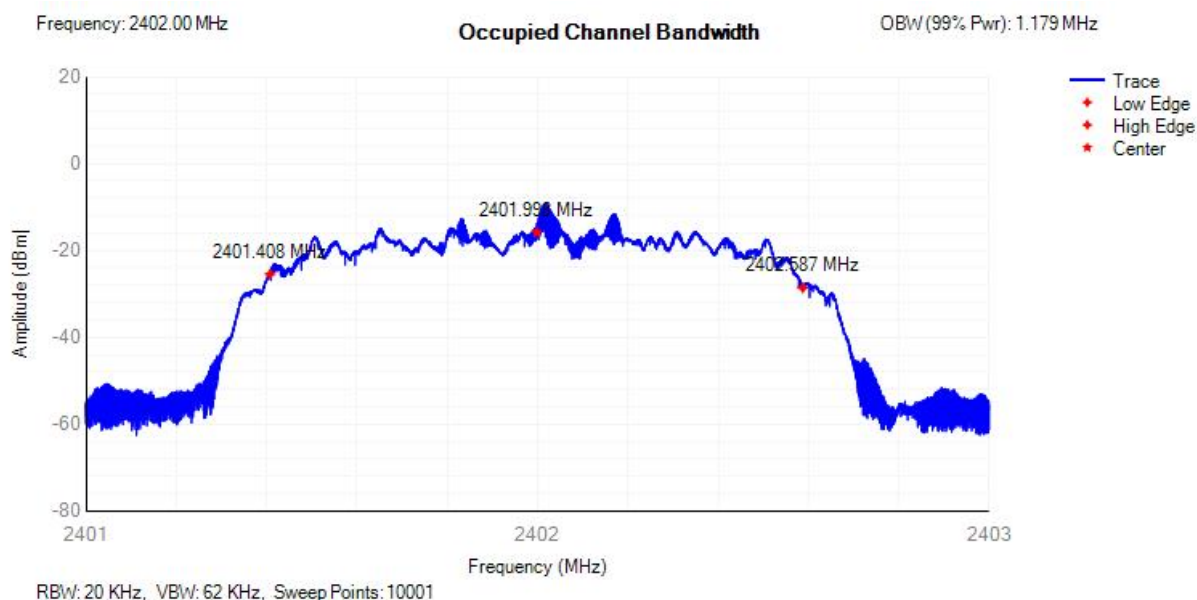



OBW NVNT 2-DH5 2480MHz

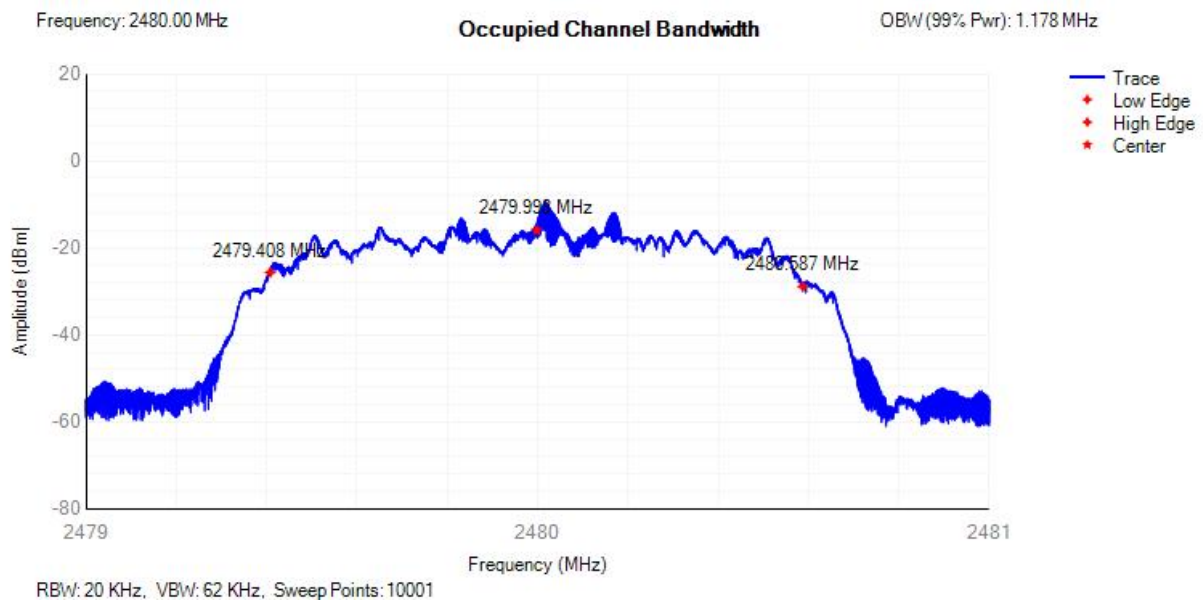




E.7 Transmitter unwanted emissions in the out-of-band domain

Condition	Mode	Frequency (MHz)	OOB Frequency (MHz)	Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	1-DH5	2402	2399.5	-69.41	-10	Pass
NVNT	1-DH5	2402	2399.321	-73.31	-10	Pass
NVNT	1-DH5	2402	2398.321	-73.24	-20	Pass
NVNT	1-DH5	2402	2398.142	-76.65	-20	Pass
NVNT	1-DH5	2402	2484	-76.48	-10	Pass
NVNT	1-DH5	2402	2484.178	-71.55	-10	Pass
NVNT	1-DH5	2402	2485.178	-70.59	-20	Pass
NVNT	1-DH5	2402	2485.356	-74.79	-20	Pass
NVNT	1-DH5	2480	2399.5	-68.01	-10	Pass
NVNT	1-DH5	2480	2399.321	-76.32	-10	Pass
NVNT	1-DH5	2480	2398.321	-73.11	-20	Pass
NVNT	1-DH5	2480	2398.142	-76.47	-20	Pass
NVNT	1-DH5	2480	2484	-71.92	-10	Pass
NVNT	1-DH5	2480	2484.178	-69.78	-10	Pass
NVNT	1-DH5	2480	2485.178	-76.11	-20	Pass
NVNT	1-DH5	2480	2485.356	-76.26	-20	Pass
NVNT	2-DH5	2402	2399.5	-76.66	-10	Pass
NVNT	2-DH5	2402	2399.321	-75.93	-10	Pass
NVNT	2-DH5	2402	2398.321	-76.93	-20	Pass
NVNT	2-DH5	2402	2398.142	-75.56	-20	Pass
NVNT	2-DH5	2402	2484	-73.93	-10	Pass
NVNT	2-DH5	2402	2484.178	-75.22	-10	Pass
NVNT	2-DH5	2402	2485.178	-76.44	-20	Pass
NVNT	2-DH5	2402	2485.356	-76.67	-20	Pass
NVNT	2-DH5	2480	2399.5	-58.78	-10	Pass
NVNT	2-DH5	2480	2399.321	-71.97	-10	Pass
NVNT	2-DH5	2480	2398.321	-73.76	-20	Pass
NVNT	2-DH5	2480	2398.142	-75.55	-20	Pass
NVNT	2-DH5	2480	2484	-74.15	-10	Pass
NVNT	2-DH5	2480	2484.178	-71.54	-10	Pass
NVNT	2-DH5	2480	2485.178	-71.78	-20	Pass
NVNT	2-DH5	2480	2485.356	-76.24	-20	Pass






Tx. Emissions OOB NVNT 1-DH5 2402MHz

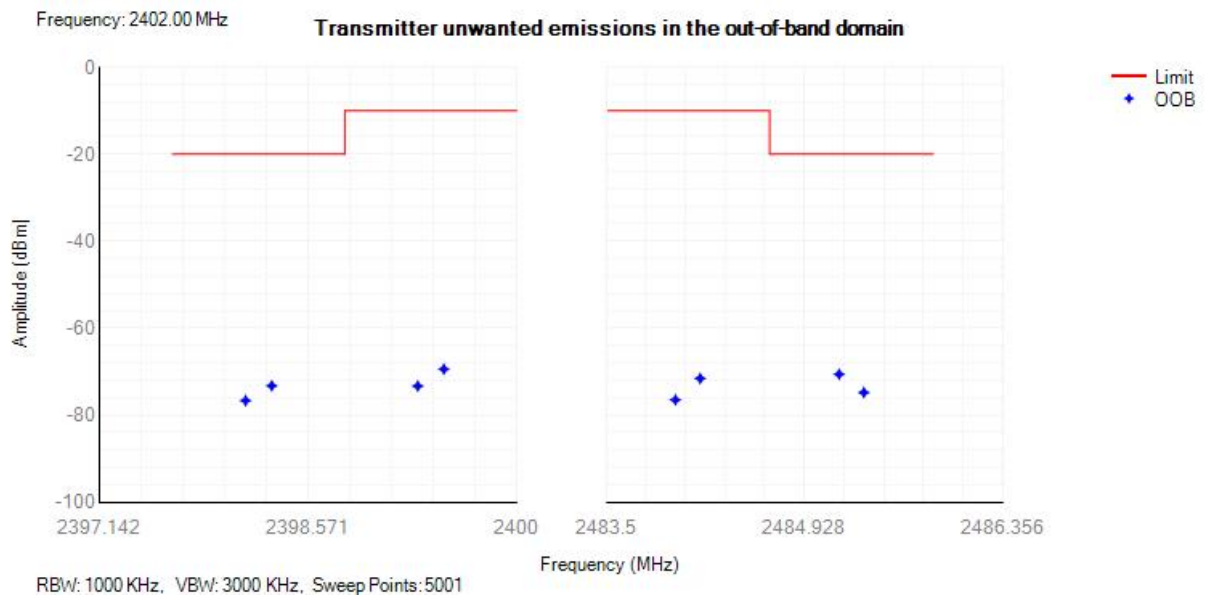


Tx. Emissions OOB NVNT 1-DH5 2480MHz

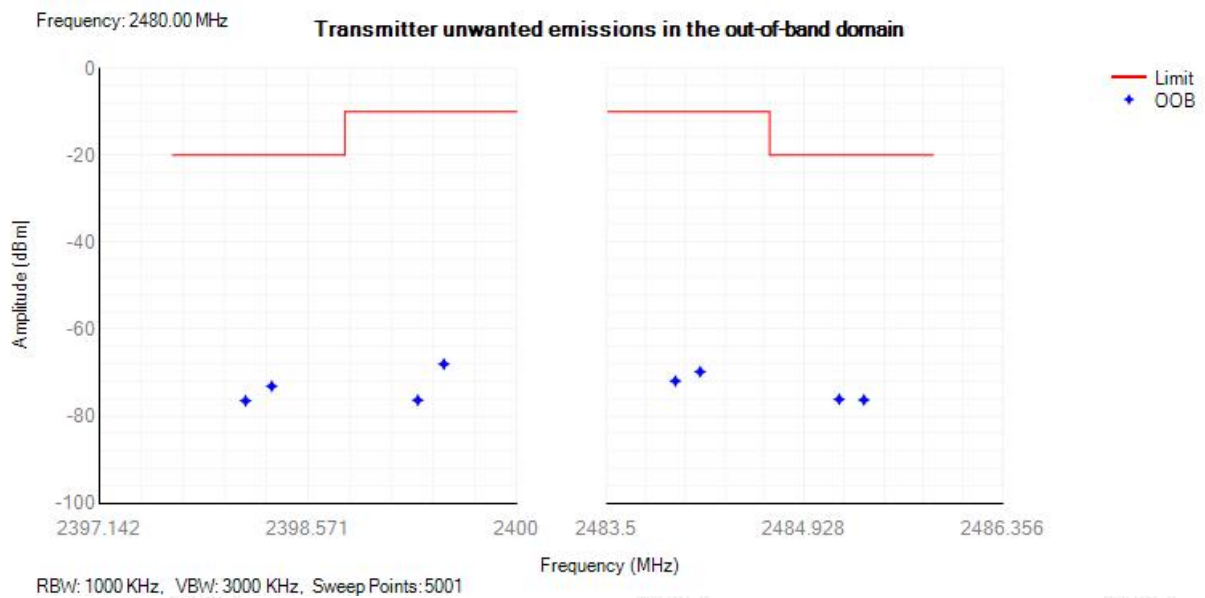




Tx. Emissions OOB NVNT 2-DH5 2402MHz

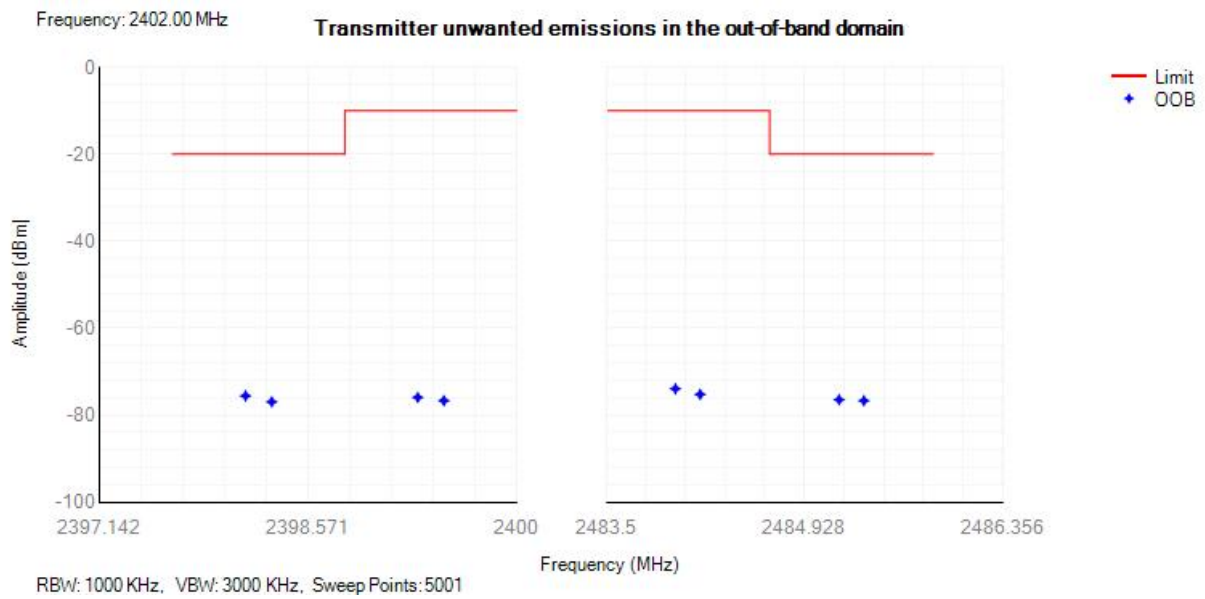

Tx. Emissions OOB NVNT 2-DH5 2480MHz

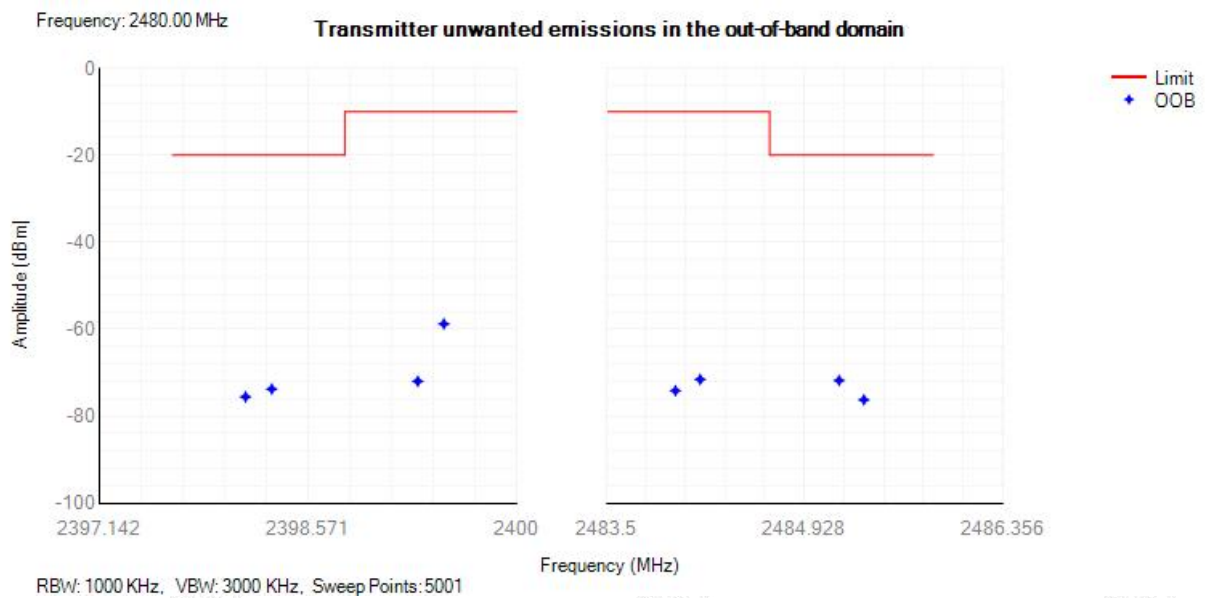





E.8 Transmitter unwanted emissions in the spurious domain

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
-----------	------	-----------------	-------	-----------------	------------------	-------------	---------

Tx. Spurious NVNT 1-DH5 2402MHz

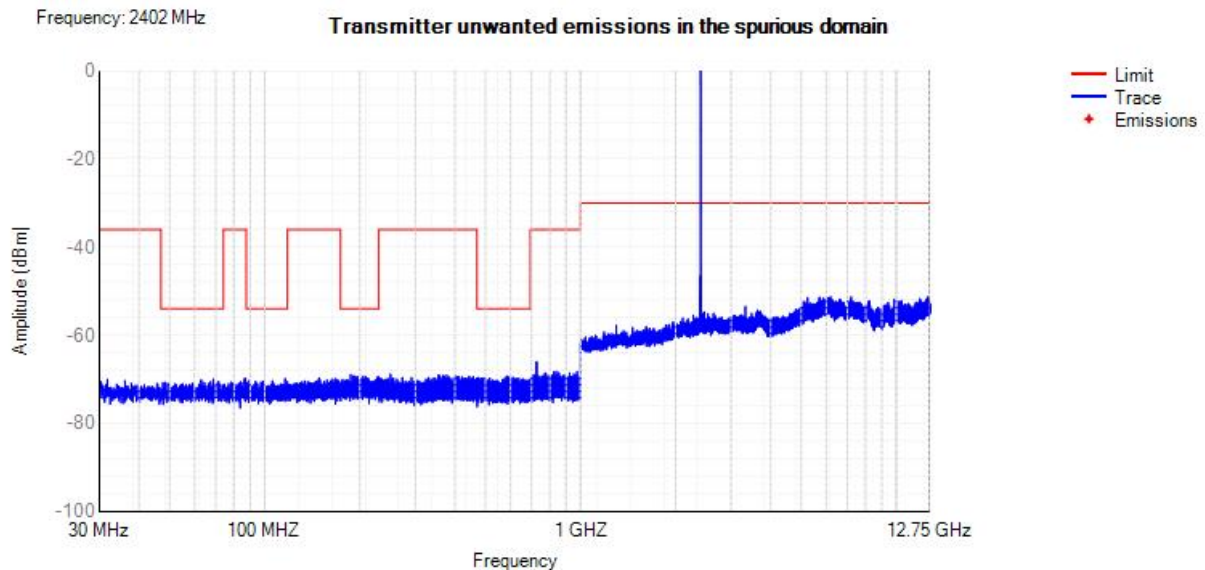


Tx. Spurious NVNT 1-DH5 2480MHz

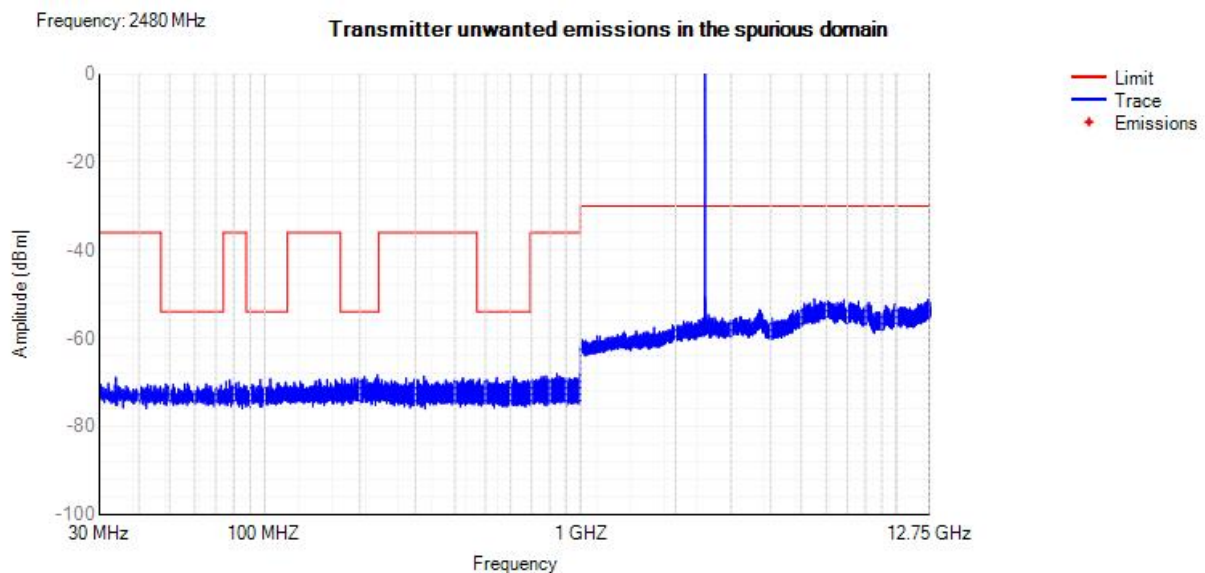




Tx. Spurious NVNT 2-DH5 2402MHz

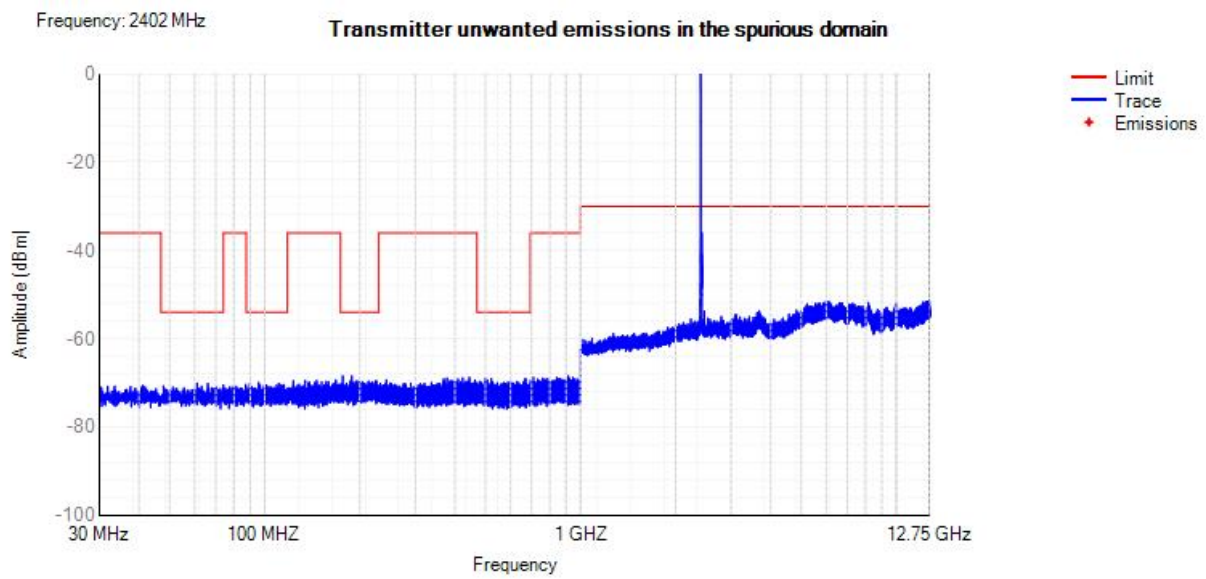

Tx. Spurious NVNT 2-DH5 2480MHz

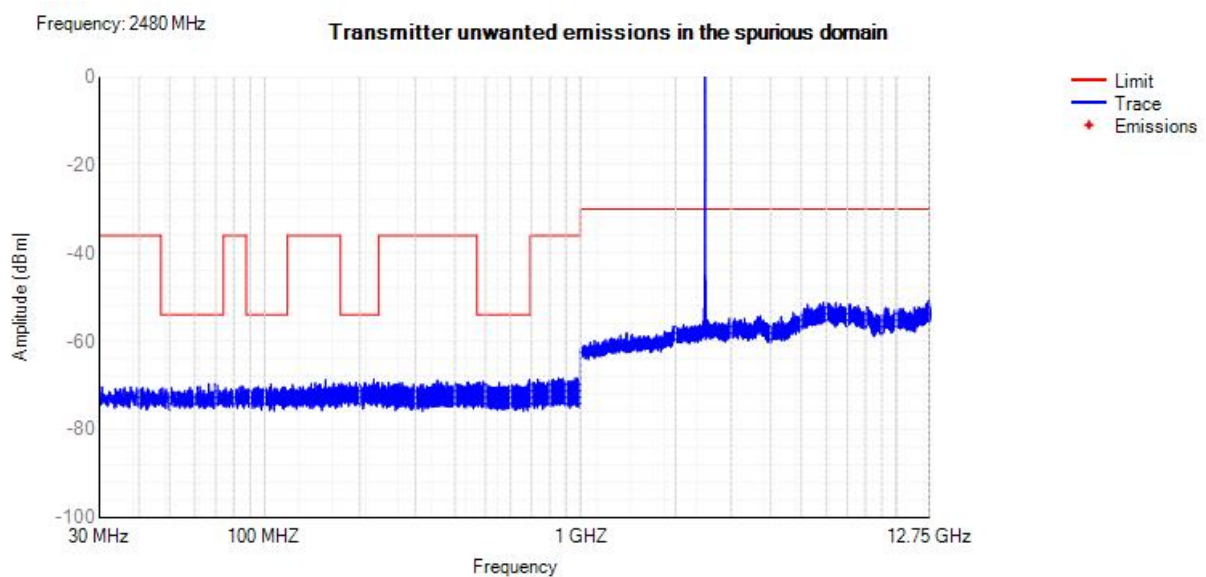





E.9 Receiver spurious emissions

Condition	Mode	Frequency (MHz)	Range	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
-----------	------	-----------------	-------	-----------------	------------------	-------------	---------

Rx. Spurious NVNT 1-DH5 2402MHz

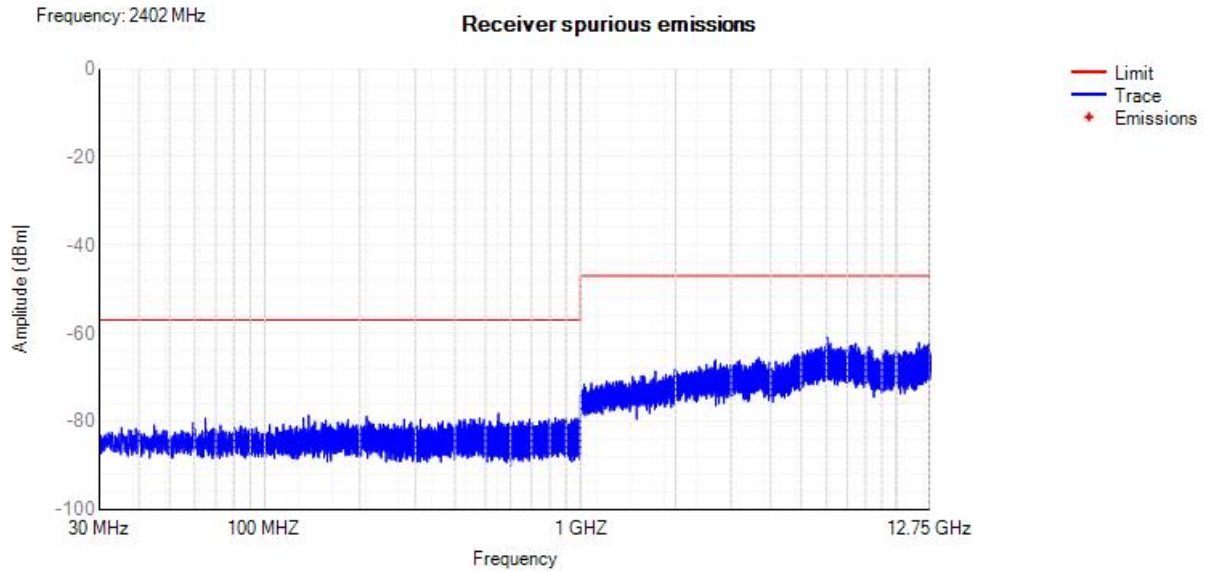


Rx. Spurious NVNT 1-DH5 2480MHz

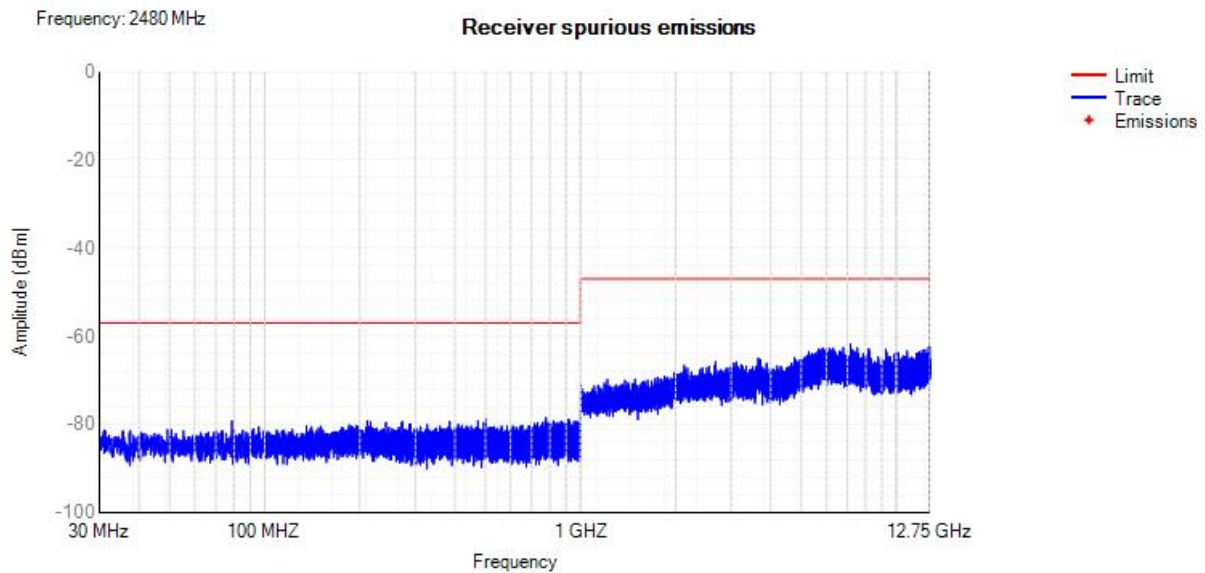




Rx. Spurious NVNT 2-DH5 2402MHz

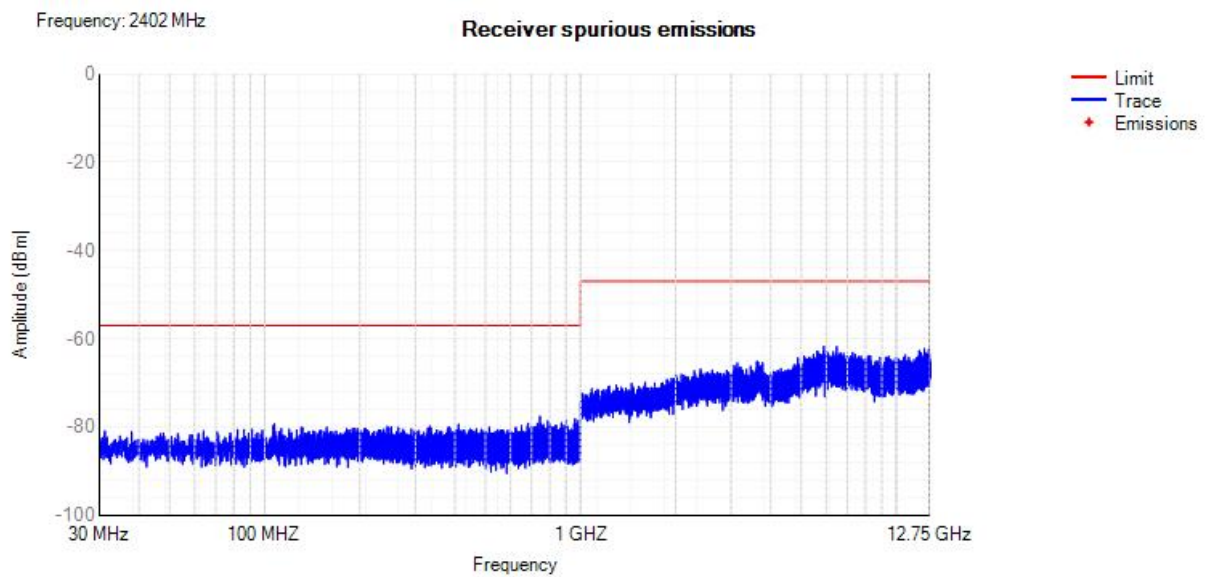

Rx. Spurious NVNT 2-DH5 2480MHz

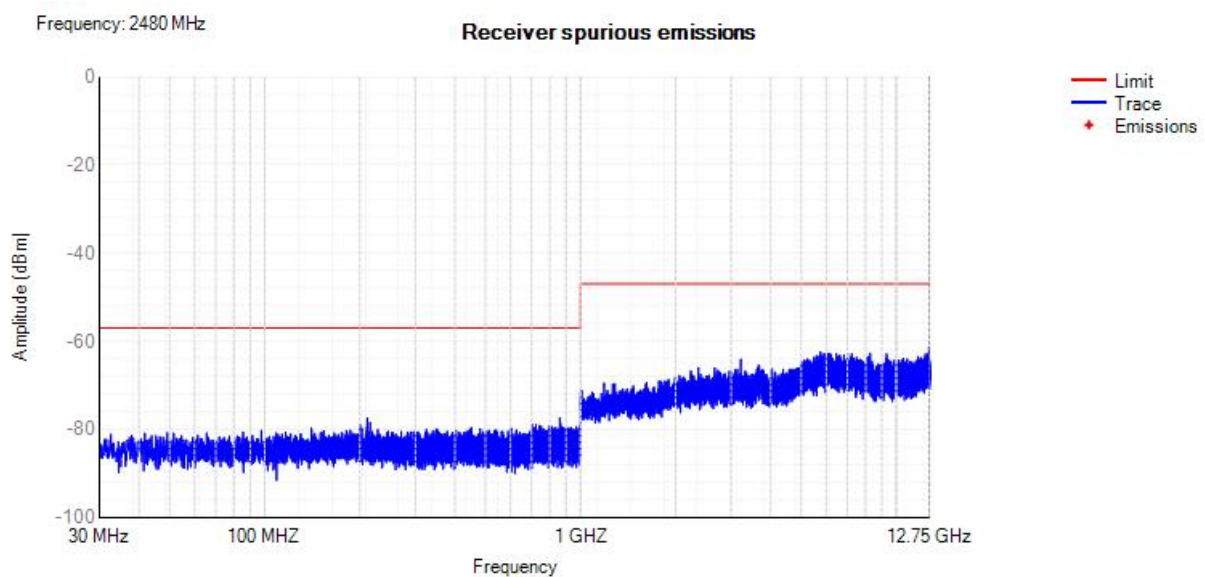



E.10 Receiver Blocking

Test Mode	Test Channel (MHz)	Wanted Signal Mean Power from Companion Device (dBm)	Blocking Signal Frequency (MHz)	Blocking Signal Power (dBm)		Type of Blocking Signal	PER(%)		Test Result
				Test Value	Limit		Test Value	Limit	
DH5	2402	-70	2380	-25	≥-34	CW	2.63	10	Pass
			2504	-26	≥-34	CW	1.95	10	Pass
			2300	-24	≥-34	CW	3.07	10	Pass
			2584	-26	≥-34	CW	2.63	10	Pass
	2480	-70	2380	-24	≥-34	CW	2.34	10	Pass
			2504	-24	≥-34	CW	2.14	10	Pass
			2300	-20	≥-34	CW	3.02	10	Pass
			2584	-24	≥-34	CW	2.24	10	Pass
2DH5	2402	-68	2380	-21	≥-34	CW	2.73	10	Pass
			2504	-26	≥-34	CW	2.89	10	Pass
			2300	-28	≥-34	CW	2.37	10	Pass
			2584	-26	≥-34	CW	2.77	10	Pass
	2480	-68	2380	-29	≥-34	CW	1.51	10	Pass
			2504	-21	≥-34	CW	2.42	10	Pass
			2300	-22	≥-34	CW	2.52	10	Pass
			2584	-23	≥-34	CW	2.74	10	Pass

