



## RADIO TEST REPORT

For

OAXIS ASIA PTE LTD

myFirst Fone S3

Test Model: KW1401

Prepared for : OAXIS ASIA PTE LTD  
Address : 31 Woodlands Close #01-22 Singapore 737855

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 22, 2022  
Number of tested samples : 2  
Sample No. : A112122073-1, A112122073-2  
Serial number : Prototype  
Date of Test : November 22, 2022 ~ December 01, 2022  
Date of Report : December 02, 2022





<b>RADIO TEST REPORT</b> <b>ETSI EN 301 511 V12.5.1 (2017-03)</b> Global System for Mobile communications (GSM); Mobile Stations (MS) equipment; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU	
<b>Report Reference No. .... : LCSA112122073EF</b>	
Date of Issue..... : December 02, 2022	
<b>Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.</b>	
Address..... : Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China	
Testing Location/ Procedure.... : Full application of Harmonised standards ■ Partial application of Harmonised standards □ Other standard testing method □	
<b>Applicant's Name..... : OAXIS ASIA PTE LTD</b>	
Address..... : 31 Woodlands Close #01-22 Singapore 737855	
<b>Test Specification</b>	
Standard..... : ETSI EN 301 511 V12.5.1 (2017-03)	
Test Report Form No..... : LCSEMC-1.0	
TRF Originator..... : Shenzhen LCS Compliance Testing Laboratory Ltd.	
Master TRF..... : Dated 2017-06	
<b>Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.</b> This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
<b>Test Item Description..... : myFirst Fone S3</b>	
Trade Mark..... : myFirst	
Test Model..... : KW1401	
Ratings ..... : Input: DC 5V, 1000mA, Max 5W Output: DC 5V, 1000mA, Max 5W DC 3.85V by Rechargeable Li-ion Battery, 650mAh	
<b>Result ..... : Positive</b>	

**Compiled by:**

Rory Huang/ Administrator

**Supervised by:**

Cary Luo/ Technique principal

**Approved by:**

Gavin Liang/ Manager



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## RADIO -- TEST REPORT

**Test Report No. : LCSA112122073EF**December 02, 2022

Date of issue

Test Model..... : KW1401

EUT..... : myFirst Fone S3

**Applicant..... : OAXIS ASIA PTE LTD**

Address..... : 31 Woodlands Close #01-22 Singapore 737855

Telephone..... : /

Fax..... : /

**Manufacturer..... : OAXIS ASIA PTE LTD**

Address..... : 31 Woodlands Close #01-22 Singapore 737855

Telephone..... : /

Fax..... : /

**Factory..... : Eastern Dynamics (Shenzhen) Technology Co., Ltd**Address..... : Building No.9, 3F, Longbi Industry Zone, Bantian Street,  
Longgang District, Shenzhen, Guangdong, China

Telephone..... : /

Fax..... : /

**Test Result****Positive**

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## Revision History

Report Version	Issue Date	Revision Content	Revised By
000	December 02, 2022	Initial Issue	---



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	6
1.2. SUPPORT EQUIPMENT LIST .....	9
1.3. EXTERNAL I/O .....	9
1.4. OBJECTIVE .....	9
1.5. TEST CONDITIONS .....	9
1.6. DESCRIPTION OF TEST MODE .....	10
1.7. MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	10
1.8. DESCRIPTION OF TEST FACILITY .....	10
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>11</b>
2.1. JUSTIFICATION .....	11
2.2. EUT EXERCISE SOFTWARE .....	11
2.3. SPECIAL ACCESSORIES .....	11
2.4. BLOCK DIAGRAM/SCHEMATICS .....	11
2.5. EQUIPMENT MODIFICATIONS .....	11
2.6. TEST SETUP .....	11
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>4. LIST OF MEASURING EQUIPMENT .....</b>	<b>16</b>
<b>5. PHOTOGRAPHS OF TEST SETUP .....</b>	<b>17</b>
<b>6. PHOTOGRAPHS OF THE EUT .....</b>	<b>17</b>





## 1. GENERAL INFORMATION

### 1.1. Product Description for Equipment Under Test (EUT)

EUT	: myFirst Fone S3
Test Model	: KW1401
Power Supply	: Input: DC 5V, 1000mA, Max 5W Output: DC 5V, 1000mA, Max 5W DC 3.85V by Rechargeable Li-ion Battery, 650mAh
Hardware Version	: ED01_MB_V1.2
Software Version	: /
Bluetooth	:
Frequency Range	: 2402MHz~2480MHz
Channel Number	: 79 channels for Bluetooth V4.2 (BDR/EDR) 40 channels for Bluetooth V4.2 (BT LE)
Channel Spacing	: 1MHz for Bluetooth V4.2 (BDR/EDR) 2MHz for Bluetooth V4.2 (BT LE)
Modulation Type	: GFSK, $\pi/4$ -DQPSK, 8-DPSK for Bluetooth V4.2 (BDR/EDR) GFSK for Bluetooth V4.2 (BT LE)
Bluetooth Version	: V4.2
Antenna Description	: Internal Antenna, 1.24dBi(Max.)
WIFI(2.4G Band)	:
Frequency Range	: 2412MHz~2472MHz
Channel Spacing	: 5MHz
Channel Number	: 13 Channel for 20MHz bandwidth(2412~2472MHz)
Modulation Type	: 802.11b: DSSS; 802.11g/n: OFDM
Antenna Description	: Internal Antenna, 1.24dBi(Max.)
2G	:
Support Band	: <input checked="" type="checkbox"/> GSM 900 (EU-Band) <input checked="" type="checkbox"/> DCS 1800 (EU-Band) <input checked="" type="checkbox"/> GSM 850 (U.S.-Band) <input type="checkbox"/> PCS 1900 (U.S.-Band)
Release Version	: R99
GPRS Class	: Class 12
EGPRS Class	: Class 12
Uplink	: GSM 900: 880MHz~915MHz DCS 1800: 1710MHz~1785MHz
Downlink	: GSM 900: 925MHz~960MHz DCS 1800: 1805MHz~1880MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Type Of Modulation : GMSK for GSM/GPRS; GMSK/8PSK for EGPRS

Antenna Description : Internal Antenna

-0.74dBi (max.) For GSM 900

0.22dBi (max.) For DCS 1800

Power Class : GSM 900: Level 5, DCS 1800: Level 0

EGPRS 900: Level 8, EGPRS 1800: Level 2

3G :

Support Band : ☐ WCDMA Band II (U.S.-Band)

☒ WCDMA Band V (U.S.-Band)

☐ WCDMA Band IV (U.S.-Band)

☒ WCDMA Band I (EU-Band)

☒ WCDMA Band VIII (EU-Band)

Release Version : R9

Uplink : WCDMA Band I: 1920MHz~1980MHz

WCDMA Band VIII: 880MHz~915MHz

Downlink : WCDMA Band I: 2110MHz~2170MHz

WCDMA Band VIII: 925MHz~960MHz

Type Of Modulation : QPSK/16QAM

Antenna Description : Internal Antenna

0.41dBi (max.) For WCDMA Band I

-0.74dBi (max.) For WCDMA Band VIII

Power Class : Level 3

LTE :

Support Band : ☒ E-UTRA Band 1(EU-Band)

☒ E-UTRA Band 3(EU-Band)

☒ E-UTRA Band 5(Non EU-Band)

☒ E-UTRA Band 7(EU-Band)

☒ E-UTRA Band 8(EU-Band)

☒ E-UTRA Band 20(EU-Band)

LTE Release Version : R10

FDD Band : Uplink: E-UTRA Band 1: 1920MHz~1980MHz

E-UTRA Band 3: 1710MHz~1785MHz

E-UTRA Band 7: 2500MHz~2570MHz

E-UTRA Band 8: 880MHz~915MHz

E-UTRA Band 20: 832MHz~862MHz

Downlink: E-UTRA Band 1: 2110MHz~2170MHz

E-UTRA Band 3: 1805MHz~1880MHz

E-UTRA Band 7: 2620MHz~2690MHz

E-UTRA Band 8: 925MHz~960MHz

E-UTRA Band 20: 791MHz~821MHz

Type Of Modulation : QPSK/16QAM



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





Antenna Description : Internal Antenna  
0.23dBi (max.) For E-UTRA Band 1  
0.21dBi (max.) For E-UTRA Band 3  
0.12dBi (max.) For E-UTRA Band 7  
-0.73dBi (max.) For E-UTRA Band 8  
-1.34dBi (max.) For E-UTRA Band 20

Power Class : Class 3

GPS Receiver :

Receive Frequency : 1575.42MHz

Channel Number : 1

Antenna Description : Internal Antenna, 1.35dBi(Max.)

GLONASS Receiver :

Receive Frequency : 1602.5625MHz

Channel Number : 1

Antenna Description : Internal Antenna, 1.35dBi(Max.)

BDS Receiver :

Frequency Range : 1561.098MHz

Channel Number : 1

Antenna Description : Internal Antenna, 1.35dBi(Max.)

QZSS Receiver :

Frequency Range : 1575.42MHz

Channel Number : 1

Antenna Description : Internal Antenna, 1.35dBi(Max.)

SBAS Receiver :

Frequency Range : 1575.42MHz

Channel Number : 1

Antenna Description : Internal Antenna, 1.35dBi(Max.)







## 1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
OPPO	Adapter	OP52KAUH	---	CE

Note: The adapter is supplied by lab and only use tested.

## 1.3. External I/O

I/O Port Description	Quantity	Cable
Charging port	1	USB Cable: 0.8m, unshielded

## 1.4. Objective

Standard Referenced	Standard Title	Standard Version
ETSI EN 301 511	Global System for Mobile communications (GSM); Mobile Stations (MS) equipment; Harmonised Standard covering the essential requirements of article 3.2 of Directive 2014/53/EU	V12.5.1 (2017-03)
ETSI TS 151 010-1	Digital cellular telecommunications system (Phase 2+); Mobile Station (MS) conformance specification; Part 1: Conformance specification (3GPP TS 51.010-1 version 12.8.0 Release 12)	V12.8.0 (2016-05)

The objective is to determine compliance with ETSI EN 301 511 V12.5.1 (2017-03).

## 1.5. Test Conditions

Conditions	Temperature	Voltage
Normal	21-25°C	DC 3.85V
Low extreme Temperature/Low extreme Voltage (TL/VL);	-20°C	DC 3.5V
Low extreme Temperature/High extreme Voltage (TL/VH);	-20°C	DC 4.4V
High extreme Temperature/Low extreme Voltage (TH/VL);	+45°C	DC 3.5V
High extreme Temperature/High extreme Voltage (TH/VH).	+45°C	DC 4.4V

Note1: For all conditions, the humidity range is:40-75%, the pressure range is 86-106kPa. The High Voltage DC 4.4V and Low Voltage DC 3.5V was declared by manufacturer





## 1.6. Description Of Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level in each test mode and channel as below:

Mode	Channel	Frequency(MHz)
GSM 900	975	880.2
	37	897.4
	124	914.8

Mode	Channel	Frequency(MHz)
DCS 1800	512	1710.2
	698	1747.4
	885	1784.8

Operating modes of EUT during test	
Traffic Mode	A communication link is set up with a System Simulator (ss). The Absolute Radio Frequency Channel Number is allocated to the lowest, middle and highest channel during the test for all working frequency bands. The EUT is commanded to operate at maximum transmitting power. A call has been established.
Idle Mode	The EUT is synchronized to SS, and able to respond to paging messages and incoming call. An established call has been released.

Note: The EUT has one SIM card slots and the result was recorded in the report.

## 1.7. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Radio Frequency	$0.9 \times 10^{-4}$
Total RF Power, Conducted	1.0 dB
RF Power Density, Conducted	1.8 dB
Spurious Emissions, Conducted	1.8 dB
All Emissions, Radiated	3.1 dB
Temperature	0.5°C
Humidity	1 %
DC And Low Frequency Voltages	1 %

## 1.8. Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024.

CAB identifier is CN0071.

CNAS Registration Number is L4595.



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## 2. SYSTEM TEST CONFIGURATION

### 2.1. Justification

N/A

### 2.2. EUT Exercise Software

N/A

### 2.3. Special Accessories

The special accessories were supplied by Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.4. Block Diagram/Schematics

Please refer to the related document.

### 2.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

### 2.6. Test Setup

Please refer to the test setup photo.





### 3. SUMMARY OF TEST RESULTS

Test Engineer	:	Ling Zhu
Temperature/ Humidity:	:	23.1℃/ 54.2%

Reference Clause No. (ETSI TS 151 010-1)	Reference Clause No. (ETSI EN 301 511)	Description of Test Items	GSM 900	DCS 1800
			Result	Result
13.1	4.2.1	Transmitter - Frequency error and phase error		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass
		Vibration X-axis	Pass	Pass
		Vibration Y-axis	Pass	Pass
		Vibration Z-axis	Pass	Pass
13.2	4.2.2	Transmitter - Frequency error under multipath and interference conditions		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass
13.16.1	4.2.4	Frequency error and phase error in GPRS multislot configuration		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass
		Vibration X-axis	Pass	Pass
		Vibration Y-axis	Pass	Pass
		Vibration Z-axis	Pass	Pass
13.3	4.2.5	Transmitter output power and burst timing		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass
13.4	4.2.6	Transmitter - Output RF spectrum		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass





		TH/VH	Pass	Pass
13.16.2	4.2.10	Transmitter output power in GPRS multislot configuration		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass
13.16.3	4.2.11	Output RF spectrum in GPRS multislot configuration		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass
12.1.1	4.2.12	Conducted spurious emissions - MS allocated a channel		
		Normal	Pass	Pass
		TN/VL	Pass	Pass
		TN/VH	Pass	Pass
12.1.2	4.2.13	Conducted spurious emissions - MS in idle mode		
		Normal	Pass	Pass
		TN/VL	Pass	Pass
		TN/VH	Pass	Pass
12.2.1	4.2.16	Radiated spurious emissions - MS allocated a channel		
		Normal	Pass	Pass
		TN/VL	Pass	Pass
		TN/VH	Pass	Pass
12.2.2	4.2.17	Radiated spurious emissions - MS in idle mode		
		Normal	Pass	Pass
		TN/VL	Pass	Pass
		TN/VH	Pass	Pass
14.7.1	4.2.20	Receiver Blocking and spurious response - speech channels		
		Normal	Pass	Pass
13.17.1	4.2.26	Frequency error and Modulation accuracy in EGPRS Configuration		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass
13.17.2	4.2.27	Frequency error under multipath and interference conditions in EGPRS Configuration		
		Normal	Pass	Pass
		TL/VL	Pass	Pass
		TL/VH	Pass	Pass
		TH/VL	Pass	Pass
		TH/VH	Pass	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





13.17.3	4.2.28	EGPRS Transmitter output power	
		Normal	Pass
		TL/VL	Pass
		TL/VH	Pass
		TH/VL	Pass
		TH/VH	Pass
13.17.4	4.2.29	Output RF spectrum in EGPRS configuration	
		Normal	Pass
		TL/VL	Pass
		TL/VH	Pass
		TH/VL	Pass
		TH/VH	Pass
14.18.5	4.2.30	Blocking and spurious response in EGPRS configuration	
		Normal	Pass
14.6.1	4.2.32	Intermodulation rejection - speech channels	
		Normal	Pass
14.6.2	4.2.33	Intermodulation rejection - control channels	
		Normal	N/A
14.18.4	4.2.34	Intermodulation rejection - EGPRS	
		Normal	Pass
14.8.1	4.2.35	AM suppression - speech channels	
		Normal	Pass
14.8.1	4.2.36	AM suppression - control channels	
		Normal	N/A
14.8.3	4.2.37	AM suppression - packet channels	
		Normal	Pass
14.5.1.1	4.2.38	Adjacent channel rejection - speech channels (TCH/FS)	
		Normal	Pass
14.5.2	4.2.39	Adjacent channel rejection - control channels	
		Normal	N/A
14.18.3	4.2.40	Adjacent channel rejection - EGPRS	
		Normal	Pass
14.2.1	4.2.42	Reference sensitivity - TCH/FS	
		Normal	Pass
14.2.3	4.2.43	Reference sensitivity - FACCH/F	
		Normal	Pass
14.16.1	4.2.44	Minimum Input level for Reference Performance - GPRS	
		Normal	Pass
		TL/VL	Pass
		TL/VH	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity





14.18.1	4.2.45	TH/VL	Pass	Pass
		TH/VH	Pass	Pass
		Minimum Input level for Reference Performance - EGPRS		
		Normal	Pass	Pass
		TL/VL (for MCS 4 only)	Pass	Pass
		TL/VH (for MCS 4 only)	Pass	Pass
		H/VL (for MCS 4 only)	Pass	Pass
		TH/VH (for MCS 4 only)	Pass	Pass

\*\*\*Note:

**Result:** Describes test result of Test Case.

**Pass:** Test Case passed on specified conformance test platform.

**Normal(TN/VN):** Normal temperature – 25°C; Normal voltage. – DC 3.85V

**TH:** High extreme Temperature – +45°C

**VH:** High extreme Voltage – DC 4.4V

**TL:** Low extreme Temperature – -20°C

**VL:** Low extreme Voltage – DC 3.5V

**Vibration X-axis/ Y-axis/ Z-axis:** Vibration test condition for X/Y/Z axis.

**N/A:** Not applicable.

—: Not test.





#### 4. LIST OF MEASURING EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	LTE Test Software	Tonscend	JS1120-1	N/A	N/A	N/A
2	RF Control Unit	Tonscend	JS0806-1	158060009	2022-10-29	2023-10-28
3	MXA Signal Analyzer	Agilent	N9020A	MY51250905	2022-10-29	2023-10-28
4	DC Power Supply	Agilent	E3642A	N/A	2022-10-29	2023-10-28
5	MXG Vector Signal Generator	Agilent	N5182A	MY47071151	2022-06-16	2023-06-15
6	PSG Analog Signal Generator	Agilent	E8257D	MY4520521	2022-06-16	2023-06-15
7	Temperature & Humidity Chamber	GUANGZHOU GOGNWEN	GDS-100	70932	2022-10-06	2023-10-05
8	EMI Test Software	Farad	EZ	/	N/A	N/A
9	3m Full Anechoic Chamber	MRDIANZI	FAC-3M	MR009	2021-09-25	2024-09-24
10	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
11	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2021-08-29	2024-08-28
12	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2021-09-12	2024-09-11
13	Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1925	2021-09-05	2024-09-04
14	Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	791	2021-08-29	2024-08-28
15	Broadband Preamplifier	SCHWARZBECK	BBV9719	9719-025	2022-06-16	2023-06-15
16	EMI Test Receiver	R&S	ESR 7	101181	2022-06-16	2023-06-15
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2022-10-29	2023-10-28
18	Broadband Preamplifier	/	BP-01M18G	P190501	2022-06-16	2023-06-15
19	WIDEBAND RADIO COMMUNICATION TESTER	R&S	CMW 500	103818	2022-06-16	2023-06-15
20	RF Filter	Micro-Tronics	BRC50718	017	2022-10-29	2023-10-28
21	RF Filter	Micro-Tronics	BRC50719	011	2022-10-29	2023-10-28
22	RF Filter	Micro-Tronics	BRC50720	011	2022-10-29	2023-10-28
23	RF Filter	Micro-Tronics	BRC50721	013	2022-10-29	2023-10-28
24	RF Filter	Micro-Tronics	BRM50702	195	2022-08-17	2023-08-16
25	6dB Attenuator	/	100W/6dB	1172040	2022-06-16	2023-06-15
26	3dB Attenuator	/	2N-3dB	/	2022-10-29	2023-10-28





## 5. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files Appendix D for Photographs of Test Setup\_RF.

## 6. PHOTOGRAPHS OF THE EUT

Please refer to separated files Appendix C for Photographs of The EUT.





## Annex A

### Transmitter output power and burst timing(Worst Case)

Mode: GSM 900 , Low channel CH 975:880.2MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
5	32.47	32.45	32.46	32.55	32.61	PASS
6	29.96	29.94	29.89	29.95	29.88	PASS
7	28.58	28.56	28.49	28.50	28.42	PASS
8	26.15	26.15	26.08	26.00	25.92	PASS
9	25.46	25.41	25.44	25.37	25.33	PASS
10	22.44	22.50	22.56	22.63	22.71	PASS
11	20.84	20.83	20.81	20.71	20.76	PASS
12	18.67	18.62	18.55	18.57	18.64	PASS
13	16.01	15.94	15.96	15.92	15.96	PASS
14	13.93	13.88	13.81	13.74	13.76	PASS
15	12.81	12.90	12.90	13.00	12.98	PASS
16	11.52	11.44	11.40	11.36	11.27	PASS
17	9.32	9.34	9.30	9.23	9.31	PASS
18	6.18	6.13	6.09	6.10	6.12	PASS
19	4.58	4.49	4.42	4.49	4.58	PASS


Mode: GSM 900 , middle channel CH 37:897.4MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
5	32.46	32.39	32.43	32.35	32.35	PASS
6	29.92	30.01	30.07	30.16	30.19	PASS
7	28.42	28.33	28.39	28.39	28.45	PASS
8	26.13	26.14	26.21	26.23	26.14	PASS
9	25.41	25.38	25.40	25.48	25.48	PASS
10	22.49	22.58	22.67	22.60	22.67	PASS
11	20.81	20.79	20.74	20.69	20.68	PASS
12	18.82	18.82	18.83	18.74	18.71	PASS
13	16.01	15.93	15.86	15.84	15.84	PASS
14	13.92	14.01	14.08	14.04	14.14	PASS
15	12.65	12.69	12.60	12.64	12.58	PASS
16	11.49	11.39	11.38	11.47	11.48	PASS
17	9.44	9.51	9.54	9.45	9.36	PASS
18	6.16	6.16	6.07	6.06	6.00	PASS
19	4.53	4.44	4.43	4.50	4.42	PASS





Mode: GSM 900 , High channel CH 124:914.8MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
5	32.44	32.52	32.54	32.58	32.48	PASS
6	29.93	29.93	29.91	29.91	29.99	PASS
7	28.58	28.57	28.66	28.70	28.68	PASS
8	26.27	26.29	26.37	26.34	26.30	PASS
9	25.43	25.42	25.38	25.47	25.49	PASS
10	22.54	22.55	22.56	22.60	22.60	PASS
11	20.75	20.79	20.85	20.77	20.69	PASS
12	18.73	18.73	18.68	18.63	18.61	PASS
13	16.12	16.12	16.05	16.00	16.00	PASS
14	13.95	13.97	13.94	14.00	14.06	PASS
15	12.80	12.73	12.80	12.80	12.75	PASS
16	11.55	11.60	11.70	11.62	11.71	PASS
17	9.29	9.38	9.35	9.30	9.30	PASS
18	6.26	6.18	6.17	6.10	6.18	PASS
19	4.66	4.68	4.77	4.74	4.68	PASS

Mode: DCS1800, Low channel CH 512:1710.2MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
0	29.64	29.70	29.74	29.67	29.74	PASS
1	28.23	28.29	28.28	28.27	28.35	PASS
2	26.24	26.21	26.19	26.17	26.26	PASS
3	23.60	23.67	23.60	23.70	23.68	PASS
4	21.09	21.11	21.06	20.99	21.05	PASS
5	20.43	20.49	20.45	20.42	20.52	PASS
6	18.74	18.71	18.75	18.65	18.73	PASS
7	16.42	16.45	16.53	16.63	16.70	PASS
8	14.52	14.60	14.67	14.72	14.64	PASS
9	11.87	11.88	11.82	11.81	11.90	PASS
10	9.49	9.45	9.54	9.47	9.38	PASS
11	7.25	7.29	7.30	7.31	7.38	PASS
12	5.74	5.76	5.73	5.66	5.59	PASS
13	4.06	4.13	4.11	4.03	4.03	PASS
14	3.19	3.17	3.20	3.24	3.33	PASS
15	0.69	0.66	0.74	0.64	0.63	PASS





Mode: DCS1800, middle channel CH 698:1747.4MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
0	29.55	29.63	29.57	29.66	29.70	PASS
1	28.28	28.20	28.27	28.18	28.20	PASS
2	26.23	26.21	26.24	26.25	26.31	PASS
3	23.65	23.57	23.65	23.70	23.77	PASS
4	21.09	21.08	21.00	21.06	21.05	PASS
5	20.42	20.34	20.43	20.36	20.29	PASS
6	18.62	18.58	18.49	18.49	18.47	PASS
7	16.48	16.41	16.43	16.36	16.39	PASS
8	14.47	14.41	14.39	14.35	14.28	PASS
9	11.94	12.01	11.92	11.86	11.88	PASS
10	9.47	9.42	9.47	9.57	9.58	PASS
11	7.26	7.31	7.28	7.24	7.20	PASS
12	5.74	5.80	5.86	5.86	5.80	PASS
13	4.14	4.19	4.18	4.24	4.32	PASS
14	3.09	3.10	3.07	3.05	3.13	PASS
15	0.57	0.59	0.54	0.47	0.55	PASS

Mode: DCS1800, high channel CH 885:1784.8MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
0	29.53	29.61	29.60	29.53	29.48	PASS
1	28.19	28.19	28.23	28.31	28.28	PASS
2	26.25	26.17	26.26	26.28	26.37	PASS
3	23.56	23.56	23.65	23.60	23.56	PASS
4	21.10	21.00	21.02	21.07	21.03	PASS
5	20.53	20.53	20.45	20.47	20.52	PASS
6	18.65	18.58	18.52	18.49	18.41	PASS
7	16.32	16.41	16.49	16.42	16.35	PASS
8	14.42	14.43	14.52	14.54	14.61	PASS
9	11.75	11.79	11.84	11.84	11.88	PASS
10	9.36	9.33	9.23	9.19	9.21	PASS
11	7.28	7.25	7.24	7.22	7.16	PASS
12	5.66	5.58	5.60	5.61	5.61	PASS
13	3.99	3.99	3.94	3.90	3.92	PASS
14	3.04	3.07	3.08	3.03	2.93	PASS
15	0.56	0.62	0.63	0.59	0.59	PASS







Mode: EGPRS 900 , Low channel CH 975:880.2MHz

Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
8	26.20	26.14	26.23	26.27	26.34	PASS
9	25.52	25.46	25.46	25.44	25.49	PASS
10	22.54	22.52	22.49	22.57	22.64	PASS
11	20.90	20.81	20.86	20.80	20.86	PASS
12	18.66	18.68	18.70	18.65	18.57	PASS
13	16.17	16.07	16.02	16.08	16.05	PASS
14	13.93	13.89	13.79	13.76	13.76	PASS
15	12.65	12.65	12.69	12.72	12.69	PASS
16	11.53	11.57	11.53	11.63	11.56	PASS
17	9.46	9.47	9.44	9.39	9.38	PASS
18	6.21	6.28	6.34	6.43	6.41	PASS
19	4.53	4.53	4.59	4.57	4.56	PASS

Mode: EGPRS 900 , middle channel CH 37:897.4MHz

Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
8	26.25	26.16	26.23	26.19	26.12	PASS
9	25.53	25.57	25.54	25.54	25.45	PASS
10	22.45	22.54	22.57	22.50	22.42	PASS
11	20.82	20.88	20.82	20.78	20.79	PASS
12	18.73	18.75	18.73	18.79	18.77	PASS
13	16.12	16.20	16.11	16.01	16.04	PASS
14	14.03	13.99	14.00	14.07	14.07	PASS
15	12.64	12.73	12.65	12.71	12.63	PASS
16	11.44	11.36	11.33	11.38	11.39	PASS
17	9.39	9.43	9.48	9.52	9.61	PASS
18	6.08	6.09	6.12	6.07	6.09	PASS
19	4.52	4.48	4.44	4.53	4.50	PASS



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Mode: EGPRS 900 , High channel CH 124:914.8MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
8	26.22	26.29	26.33	26.24	26.15	PASS
9	25.41	25.33	25.38	25.32	25.31	PASS
10	22.43	22.34	22.30	22.21	22.23	PASS
11	20.79	20.77	20.77	20.79	20.84	PASS
12	18.69	18.75	18.69	18.70	18.61	PASS
13	16.13	16.21	16.23	16.24	16.16	PASS
14	13.93	13.92	13.85	13.86	13.91	PASS
15	12.79	12.73	12.79	12.71	12.66	PASS
16	11.41	11.38	11.45	11.52	11.47	PASS
17	9.35	9.45	9.54	9.49	9.41	PASS
18	6.27	6.26	6.21	6.18	6.12	PASS
19	4.51	4.43	4.47	4.48	4.42	PASS

Mode: EGPRS 1800, Low channel CH 512:1710.2MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
2	26.36	26.41	26.50	26.47	26.42	PASS
3	23.71	23.73	23.77	23.79	23.84	PASS
4	20.95	20.85	20.86	20.96	20.88	PASS
5	20.59	20.60	20.60	20.62	20.60	PASS
6	18.63	18.56	18.49	18.42	18.46	PASS
7	16.34	16.41	16.41	16.37	16.42	PASS
8	14.58	14.63	14.62	14.59	14.68	PASS
9	11.76	11.71	11.75	11.74	11.75	PASS
10	9.51	9.51	9.56	9.52	9.56	PASS
11	7.36	7.33	7.30	7.22	7.16	PASS
12	5.71	5.75	5.83	5.87	5.84	PASS
13	4.01	4.08	3.98	3.99	4.07	PASS
14	3.02	3.08	3.03	2.98	2.89	PASS
15	0.69	0.75	0.75	0.76	0.84	PASS





Mode: EGPRS 1800, middle channel CH 698:1747.4MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
2	26.28	26.32	26.26	26.28	26.27	PASS
3	23.64	23.55	23.62	23.56	23.62	PASS
4	20.94	20.85	20.90	20.93	20.95	PASS
5	20.40	20.40	20.39	20.44	20.48	PASS
6	18.66	18.64	18.65	18.72	18.78	PASS
7	16.43	16.42	16.40	16.41	16.36	PASS
8	14.45	14.51	14.56	14.65	14.59	PASS
9	11.90	11.90	11.83	11.79	11.81	PASS
10	9.47	9.51	9.50	9.57	9.66	PASS
11	7.30	7.36	7.37	7.37	7.31	PASS
12	5.82	5.72	5.74	5.75	5.70	PASS
13	4.10	4.08	4.03	3.98	4.04	PASS
14	3.13	3.22	3.22	3.17	3.15	PASS
15	0.54	0.63	0.55	0.64	0.66	PASS

Mode: EGPRS 1800, high channel CH 885:1784.8MHz						
Power Control level	Output power(dBm)					Conclusion
	Normal	TL/VL	TH/VL	TL/VH	TH/VH	
2	26.33	26.35	26.29	26.26	26.21	PASS
3	23.62	23.61	23.69	23.71	23.72	PASS
4	20.93	20.88	20.91	20.86	20.89	PASS
5	20.53	20.49	20.49	20.56	20.51	PASS
6	18.64	18.72	18.82	18.75	18.73	PASS
7	16.44	16.39	16.45	16.51	16.60	PASS
8	14.53	14.49	14.51	14.48	14.48	PASS
9	11.89	11.97	12.06	12.01	12.01	PASS
10	9.37	9.47	9.53	9.58	9.58	PASS
11	7.40	7.38	7.38	7.29	7.23	PASS
12	5.73	5.82	5.78	5.78	5.70	PASS
13	4.06	4.07	4.16	4.16	4.18	PASS
14	3.13	3.09	3.19	3.18	3.12	PASS
15	0.70	0.73	0.81	0.78	0.78	PASS






## Transmitter spurious emissions


Conducted spurious emissions - MS allocated a channel (Worst Case)

The Worst Test Result of Spurious Emissions for GSM 900 (Middle Channel, Traffic)

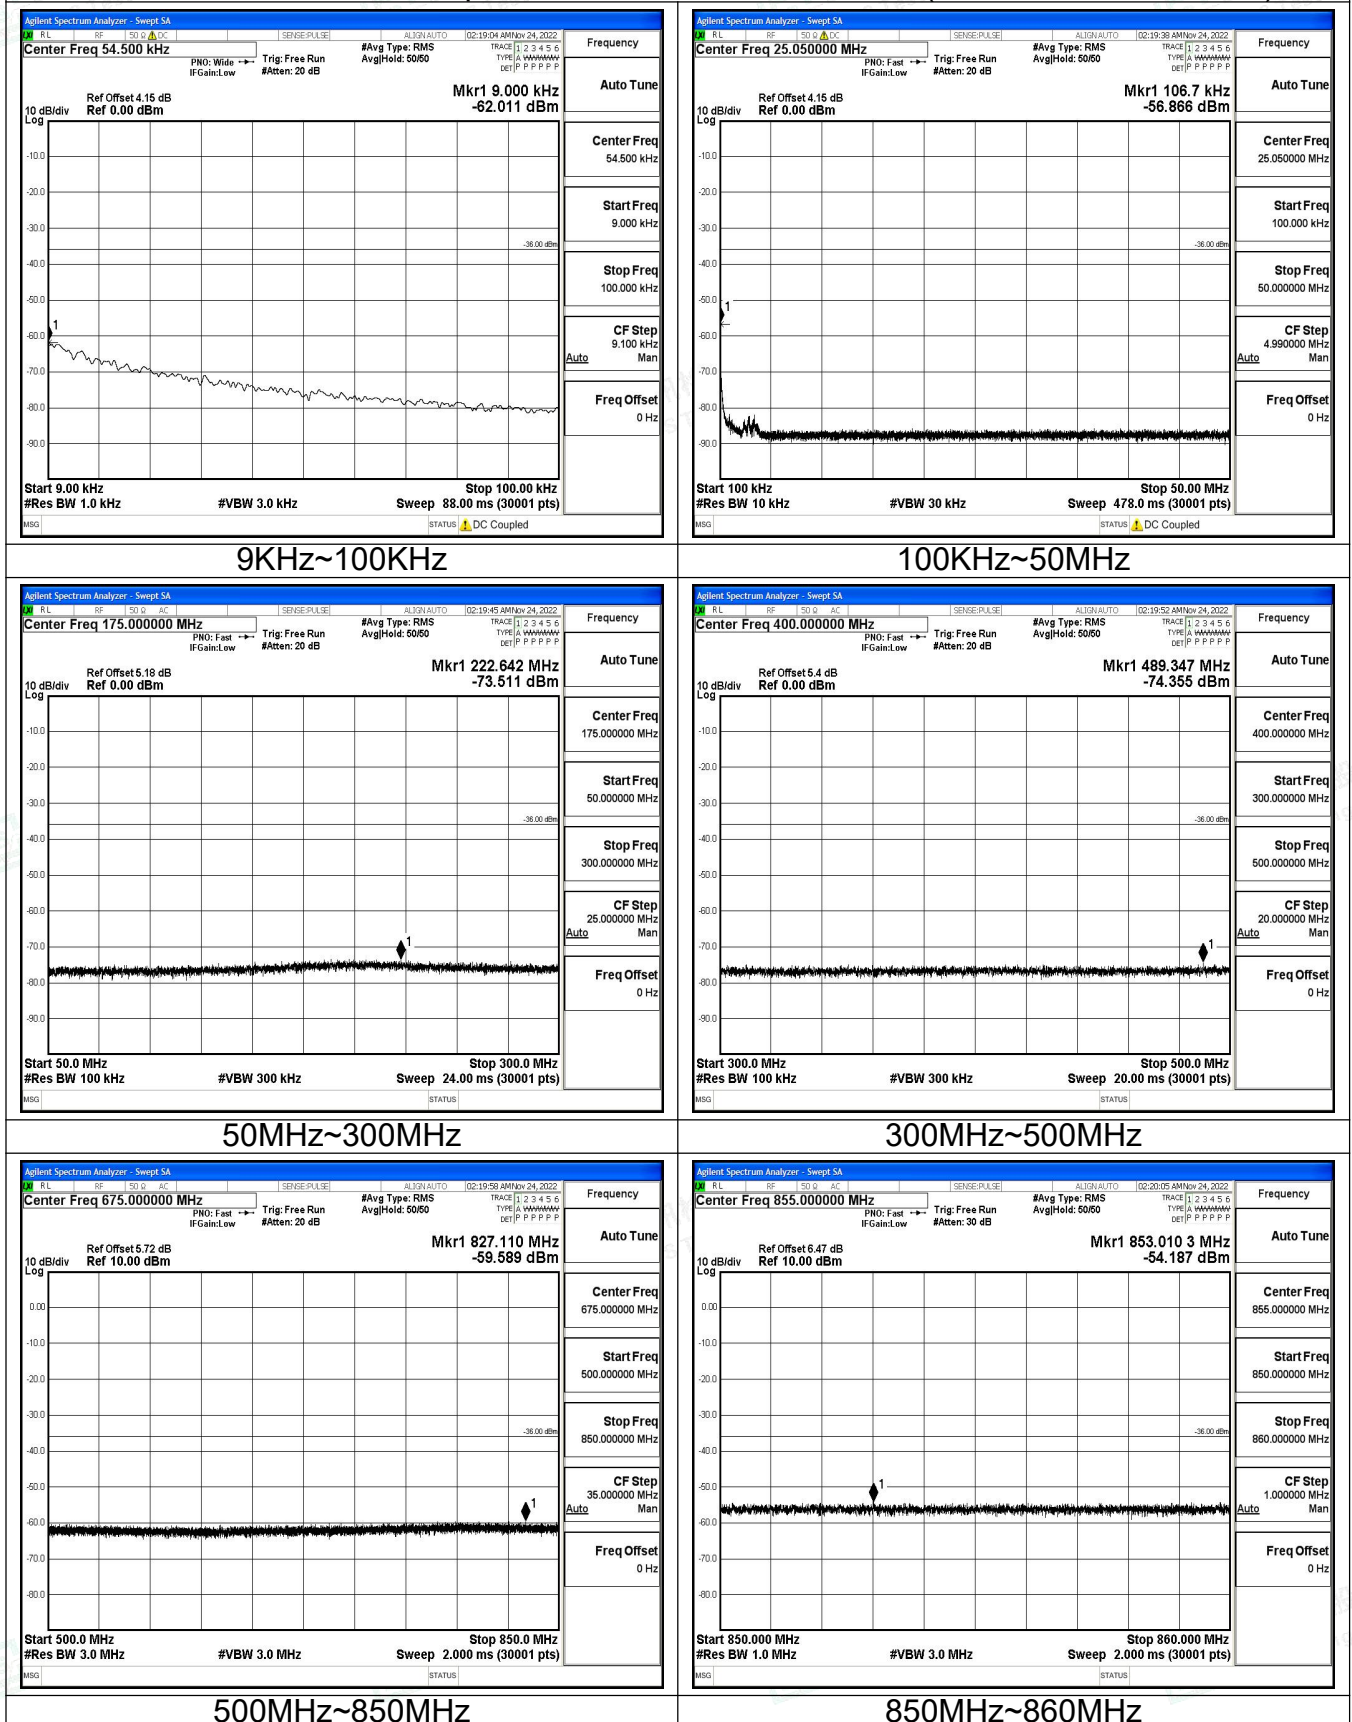





## The Worst Test Result of Spurious Emissions for GSM 900 (Middle Channel, Traffic)

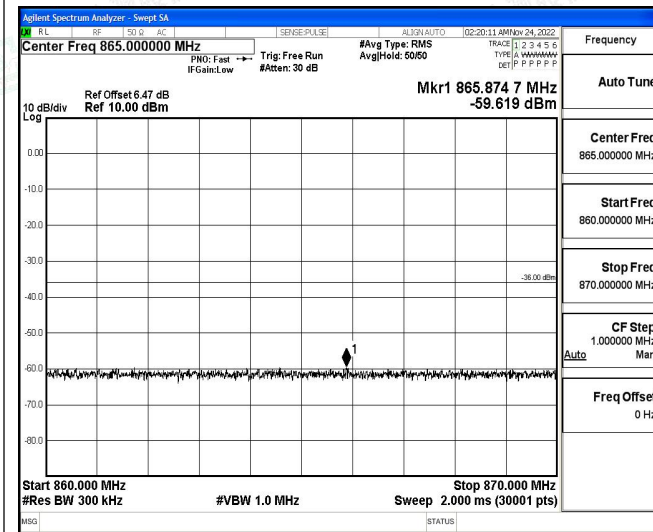


860MHz~870MHz

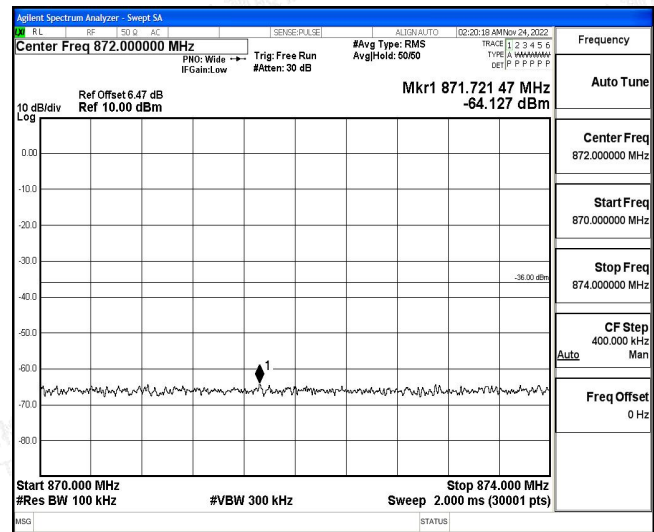


870MHz~874MHz

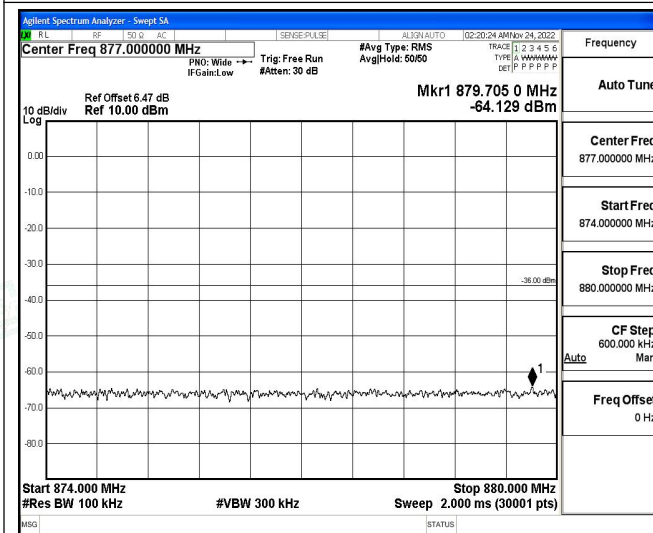


874MHz~880MHz

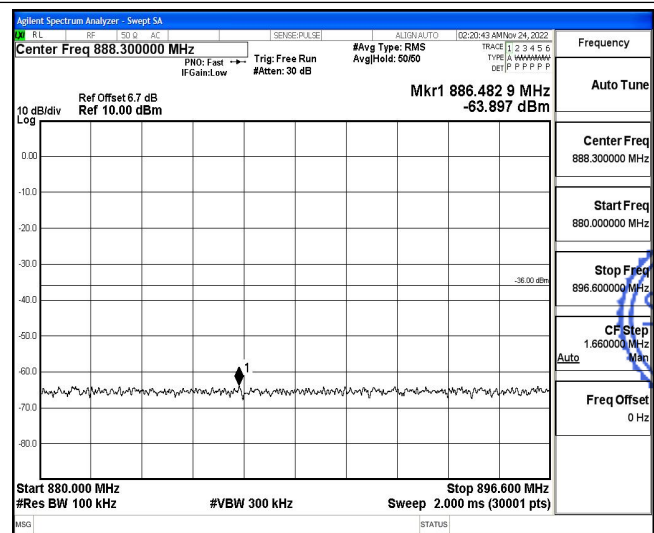

880.0MHz~896.6MHz

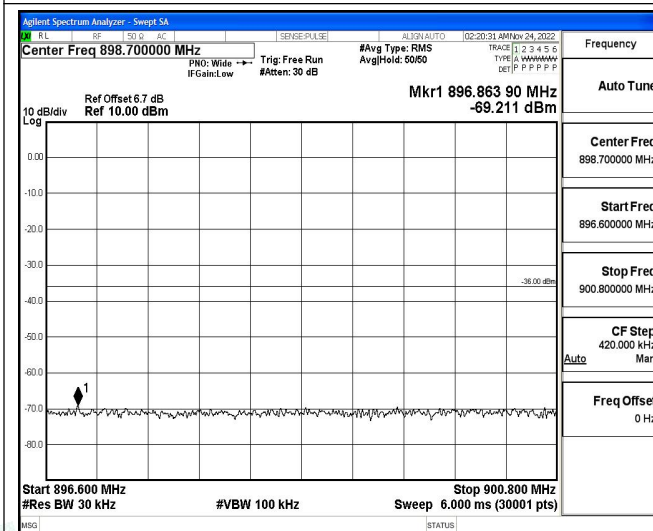

896.6MHz~900.8MHz

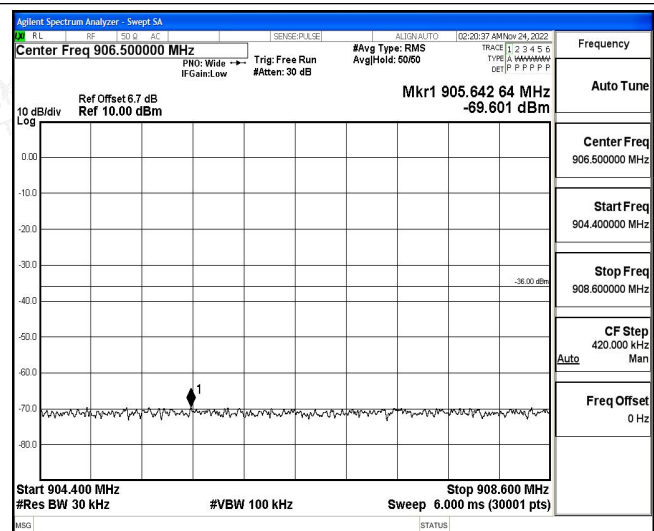

904.4MHz~908.6MHz



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China


Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity






## The Worst Test Result of Spurious Emissions for GSM 900 (Middle Channel, Traffic)

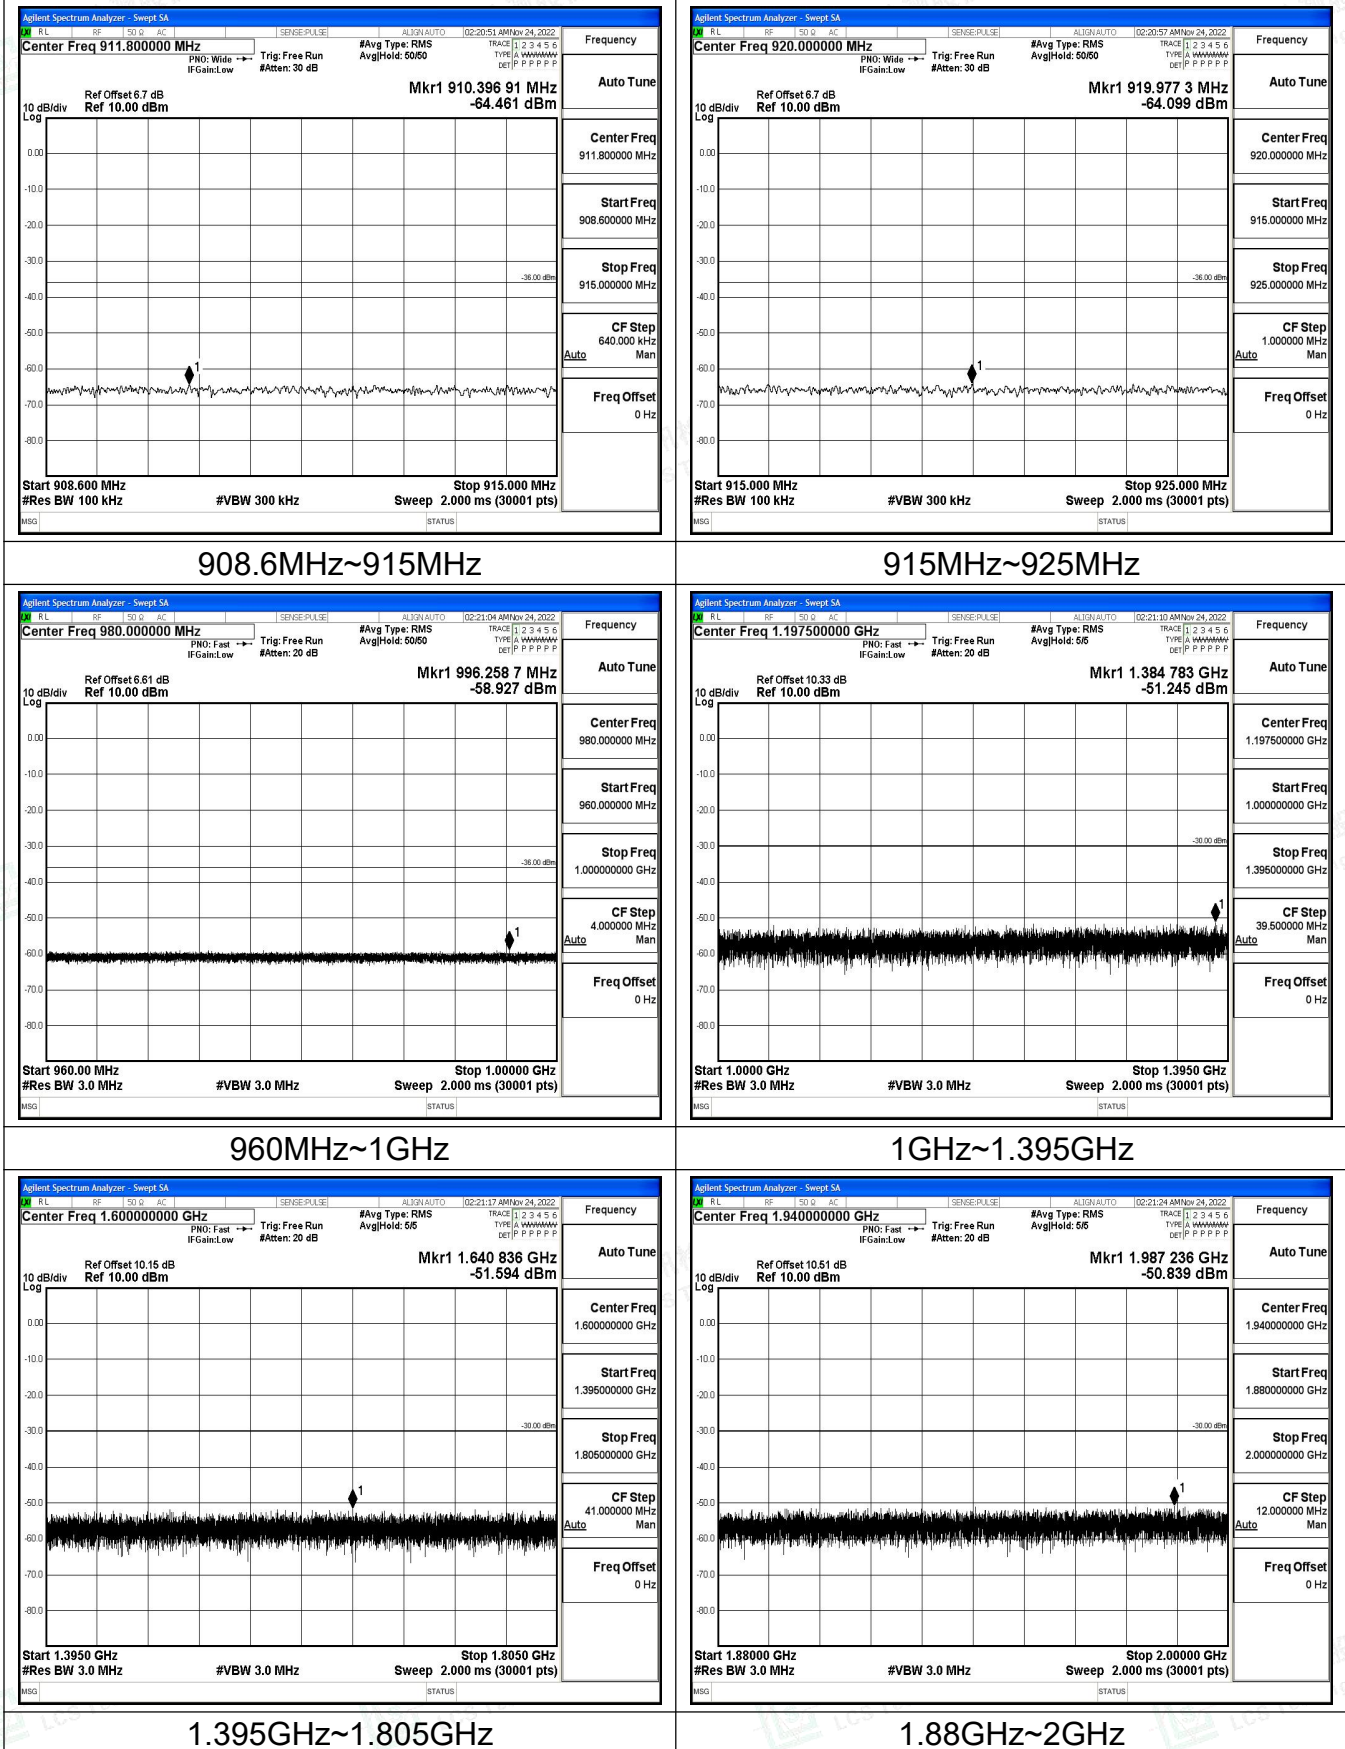






## The Worst Test Result of Spurious Emissions for GSM 900 (Middle Channel, Traffic)

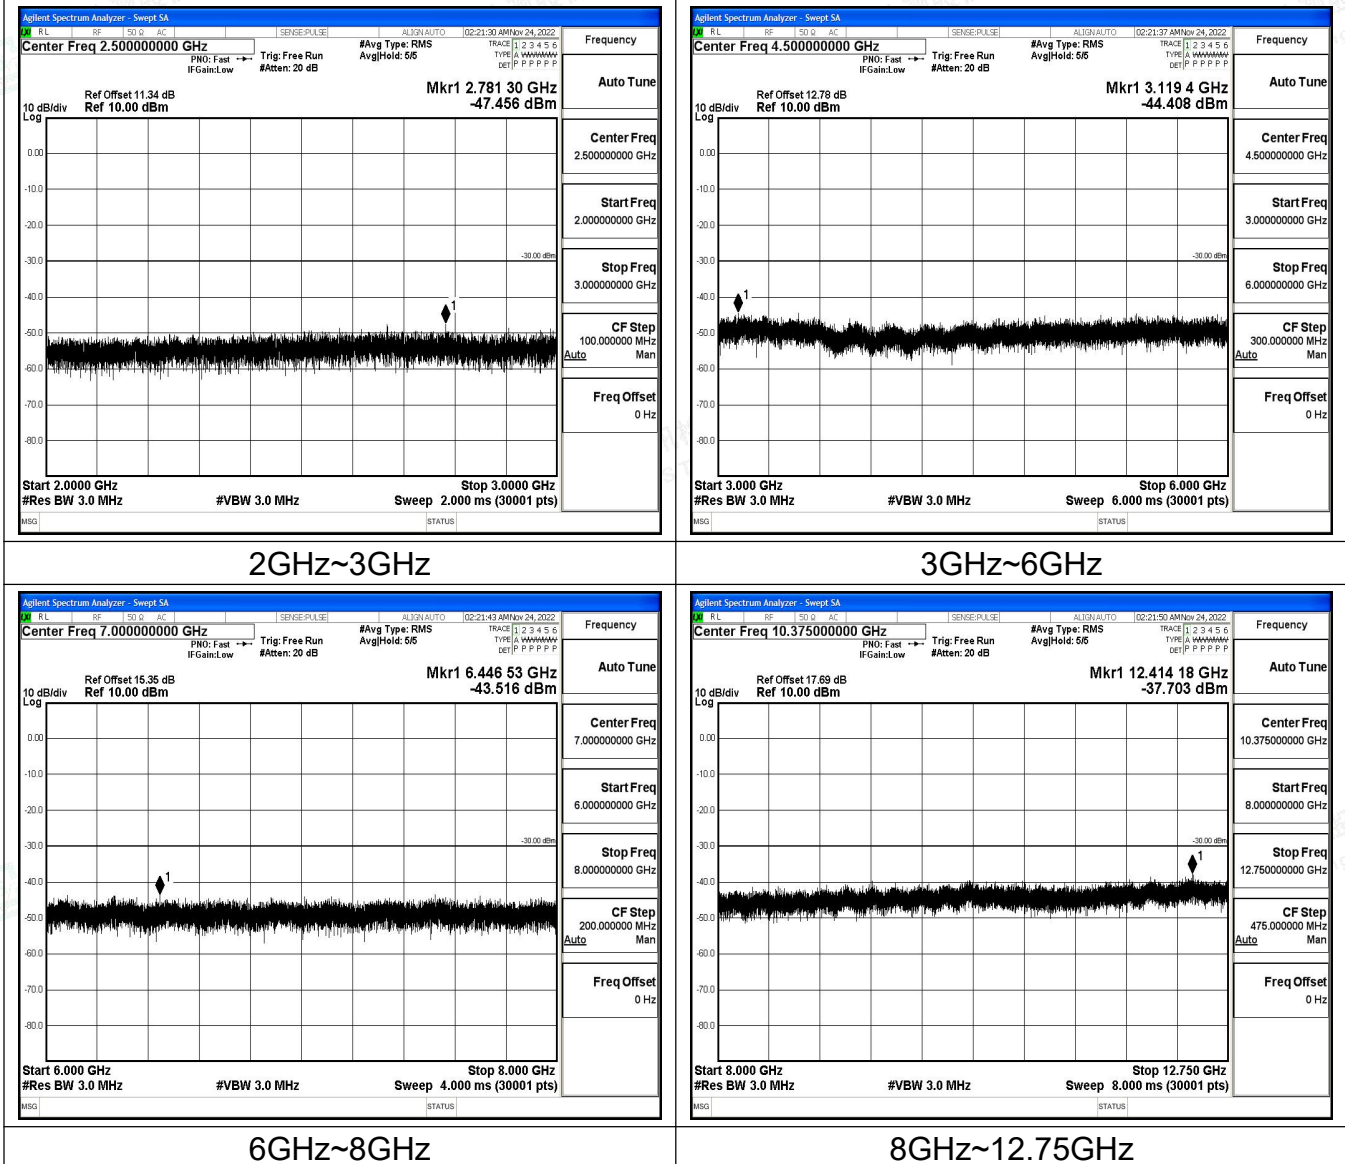





## The Worst Test Result of Spurious Emissions for DCS 1800 (Middle Channel, Traffic)

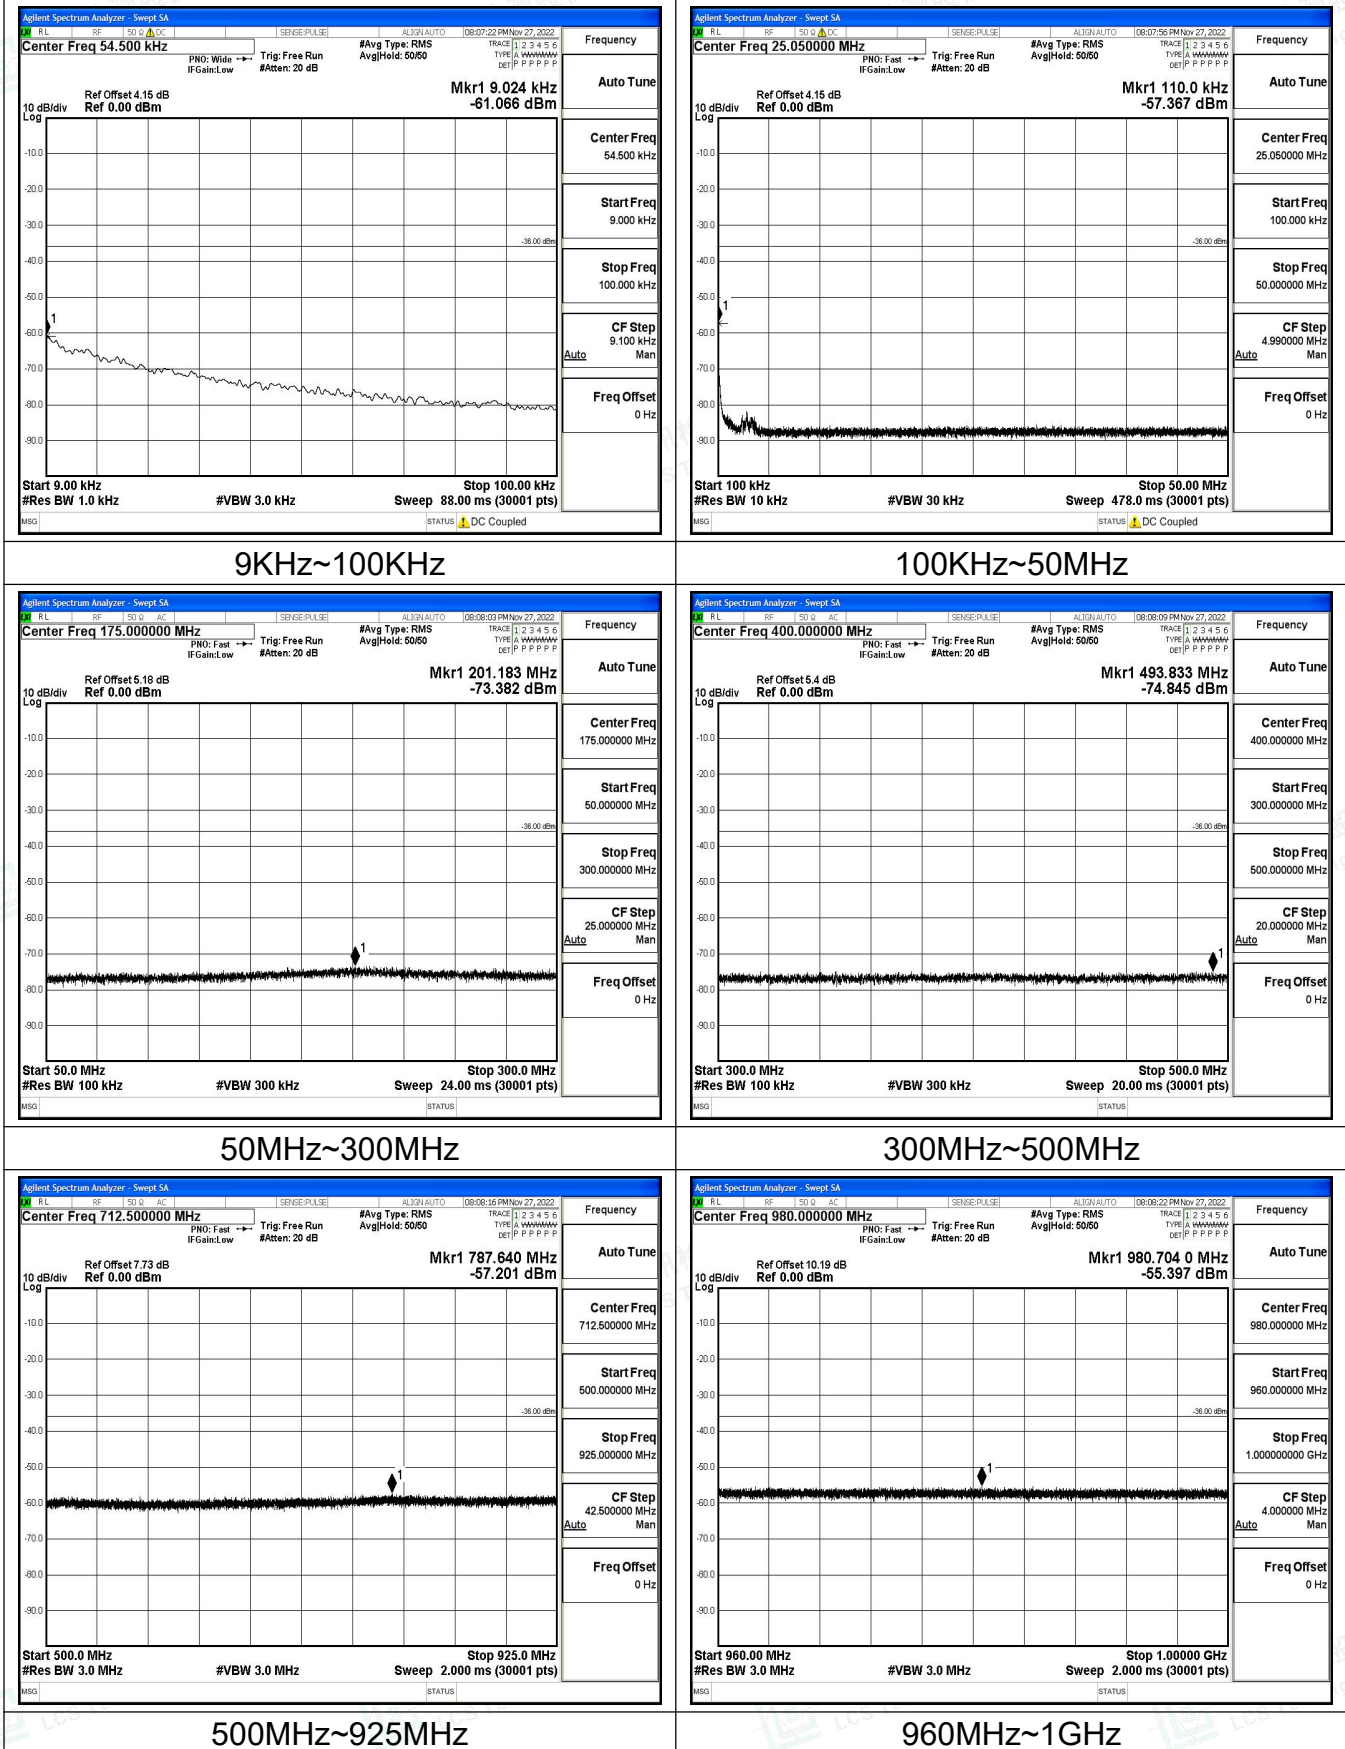





## The Worst Test Result of Spurious Emissions for DCS 1800 (Middle Channel, Traffic)

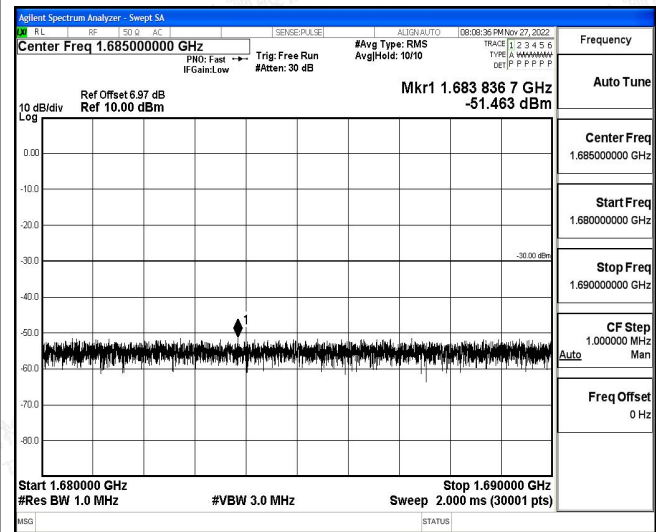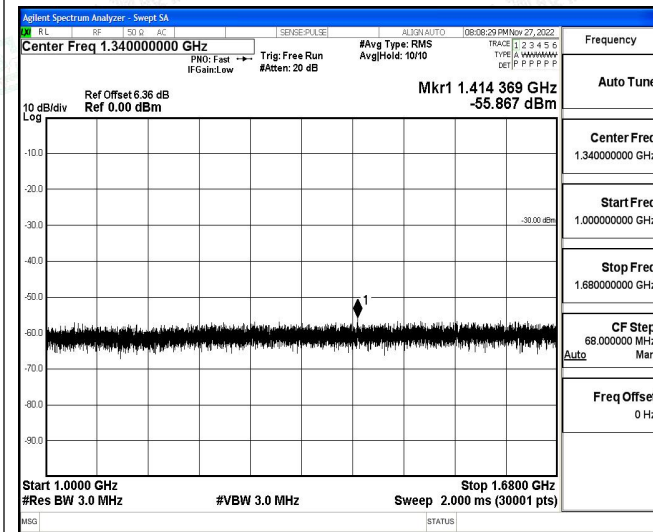



1GHz~1.680GHz

1.680GHz~1.690GHz

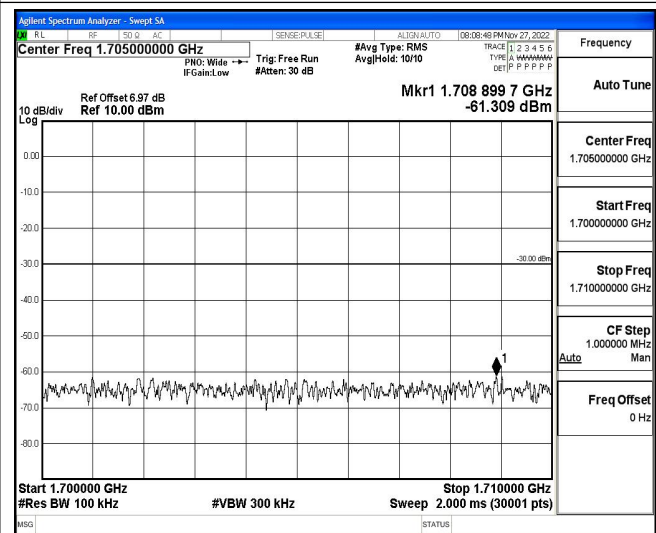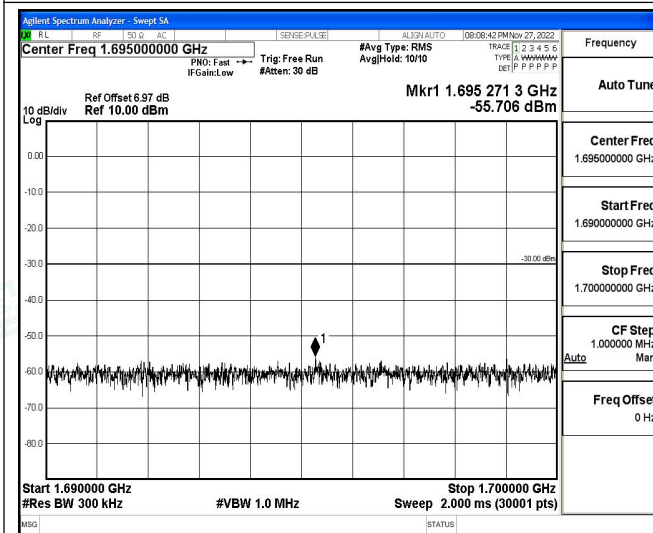

1.690GHz~1.700GHz

1.700GHz~1.710GHz

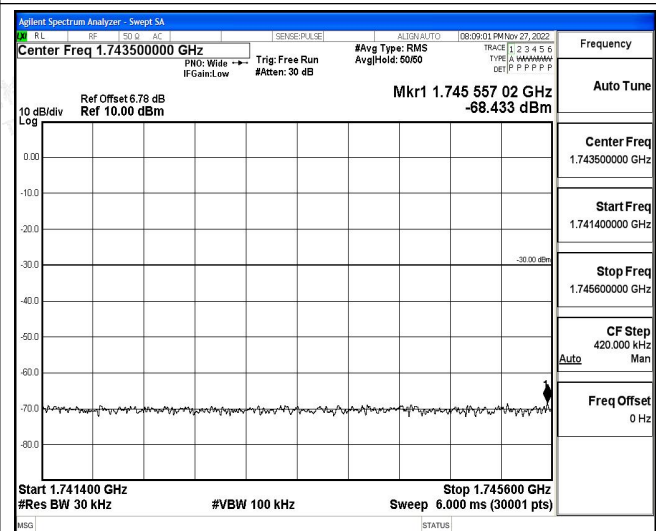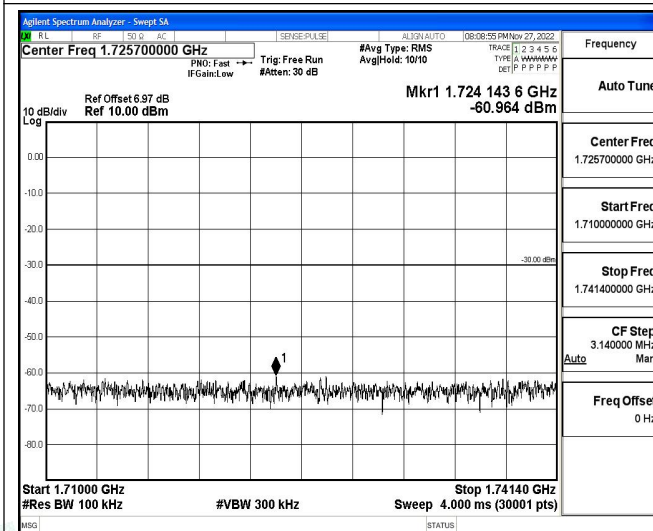


1.7100GHz~1.7414GHz

1.7414GHz~1.7456GHz






## The Worst Test Result of Spurious Emissions for DCS 1800 (Middle Channel, Traffic)

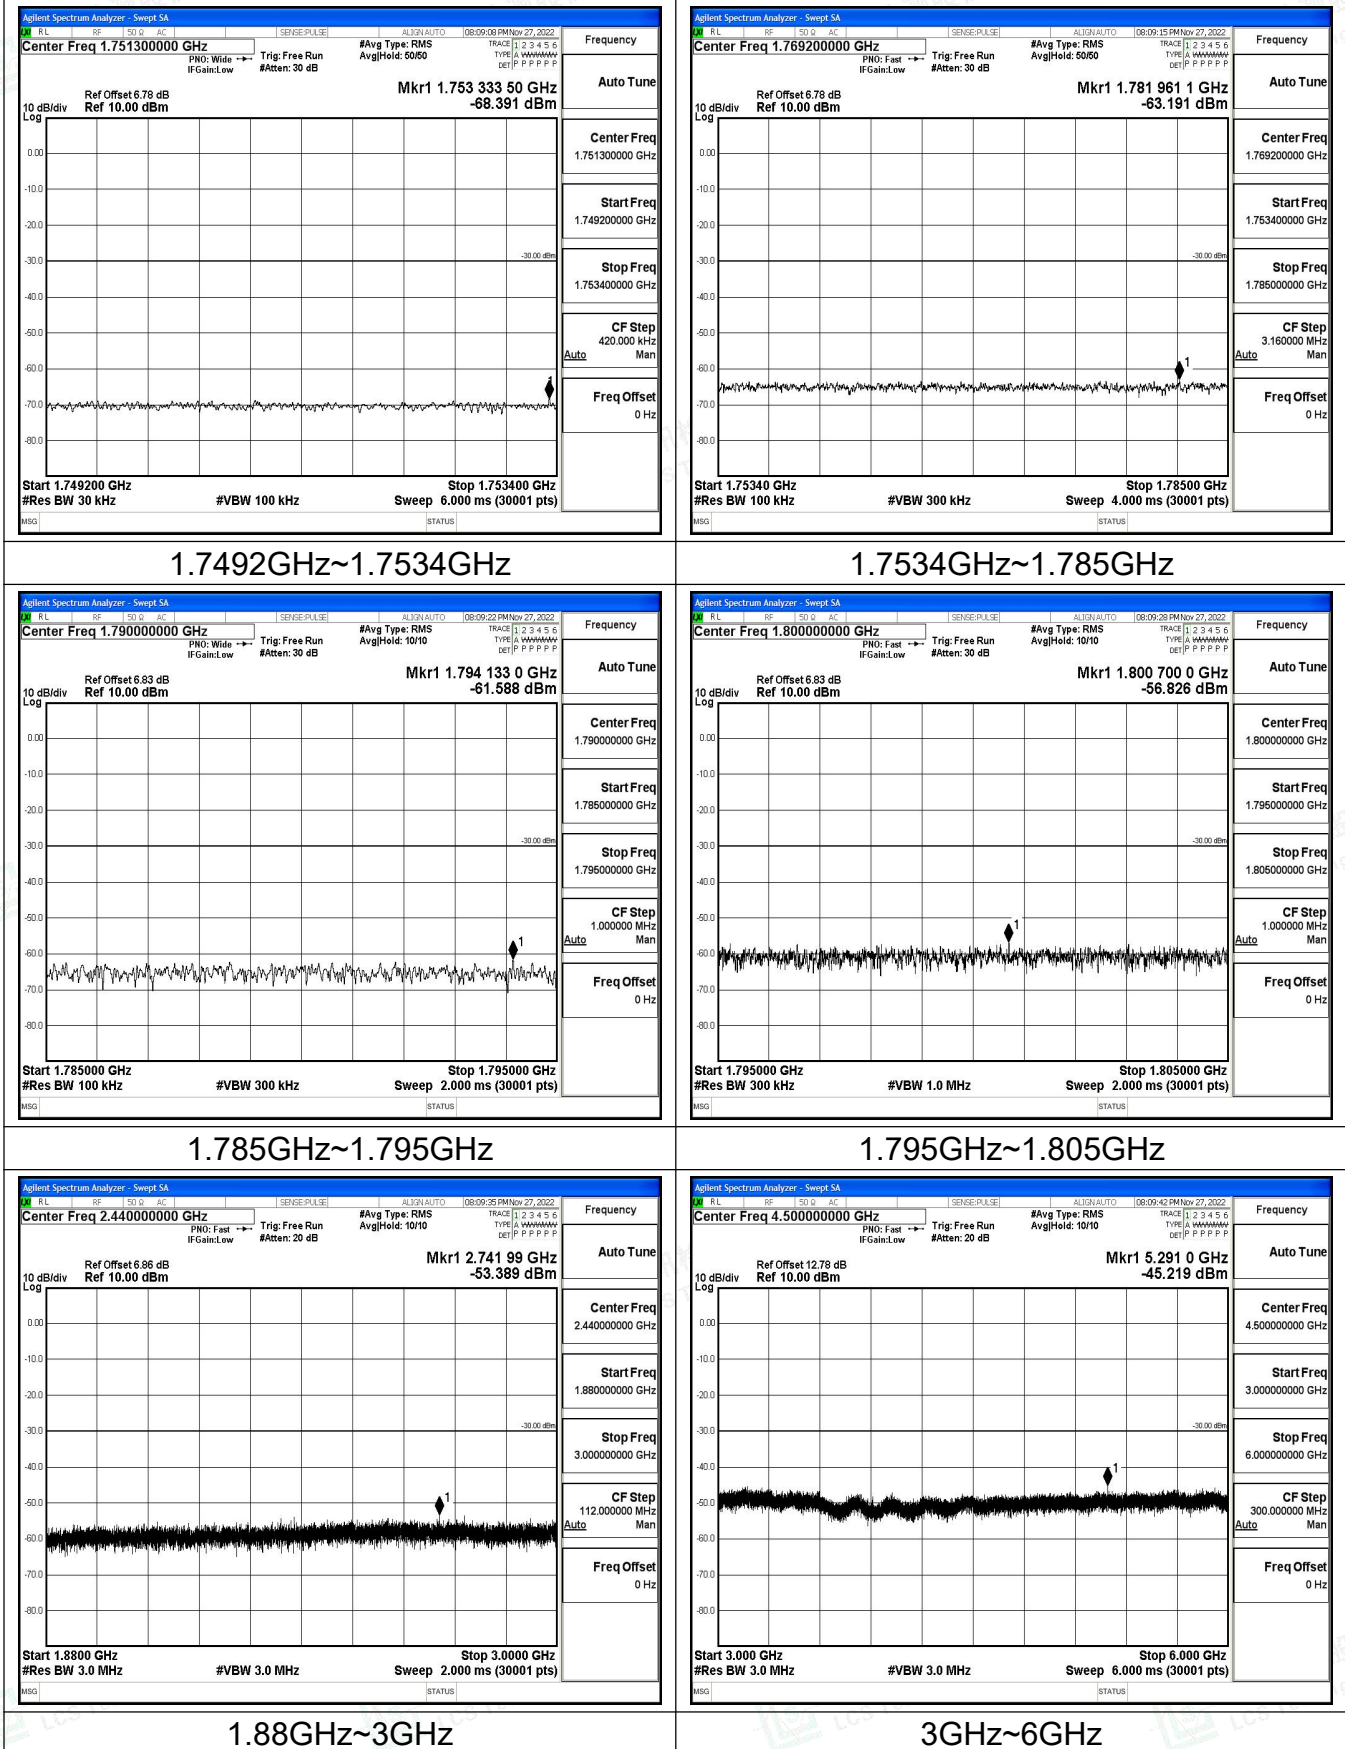





## The Worst Test Result of Spurious Emissions for DCS 1800 (Middle Channel, Traffic)

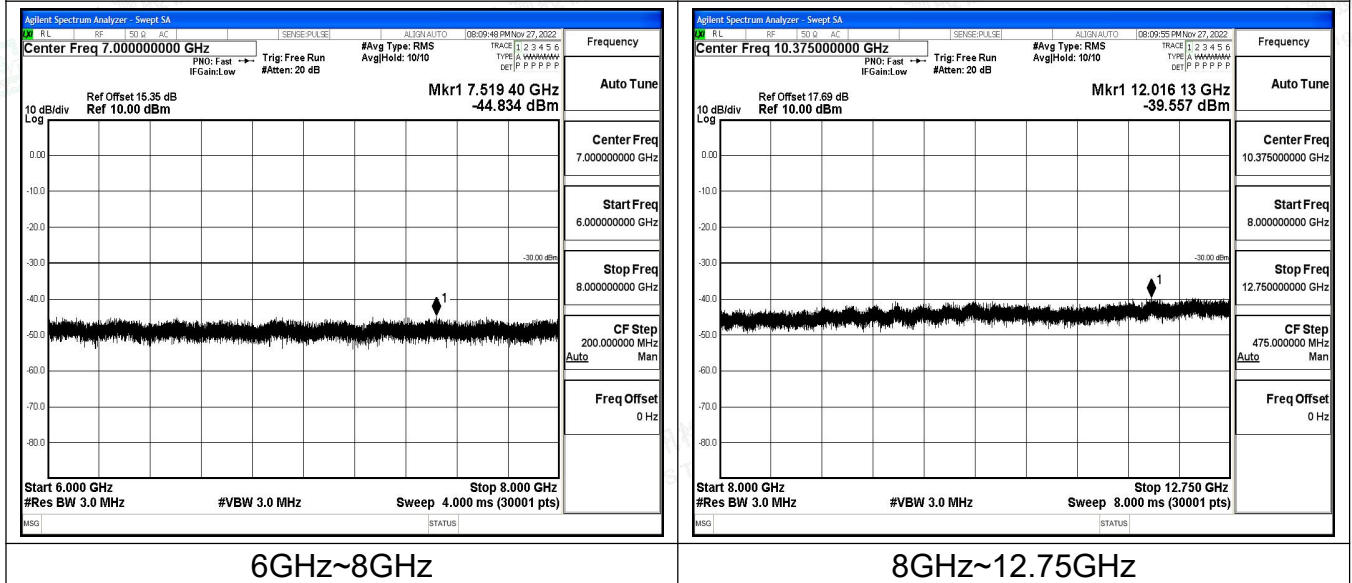



## Transmitter spurious emissions

### Radiated spurious emissions - MS allocated a channel(Worst Case)

GSM 900 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
147.42	Horizontal	-58.22	-36.00	Pass
311.55	H	-68.81	-36.00	
1793.96	H	-52.39	-30.00	
2692.54	H	-51.14	-30.00	
3585.91	H	-59.83	-30.00	
GSM 900 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
215.37	Vertical	-63.46	-36.00	Pass
457.07	V	-56.29	-36.00	
1790.77	V	-62.94	-30.00	
2691.48	V	-63.98	-30.00	
3580.74	V	-62.06	-30.00	

GSM 1800 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
123.91	Horizontal	-57.95	-36.00	Pass
430.15	H	-52.30	-36.00	
1440.82	H	-64.91	-30.00	
2824.47	H	-58.96	-30.00	
3493.79	H	-61.32	-30.00	
GSM 1800 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
168.37	Vertical	-59.98	-36.00	Pass
436.30	V	-66.83	-36.00	
1444.01	V	-58.99	-30.00	
2828.15	V	-53.42	-30.00	
3492.87	V	-58.91	-30.00	







## Radiated spurious emissions - MS in Idle Mode(Worst Case)

GSM 900 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
238.24	Horizontal	-73.87	-57.00	Pass
414.19	H	-70.24	-57.00	
1040.92	H	-74.84	-47.00	
2359.16	H	-72.69	-47.00	
3476.72	H	-69.57	-47.00	
GSM 900 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
170.38	Vertical	-66.47	-57.00	Pass
441.75	V	-63.95	-57.00	
1476.76	V	-75.04	-47.00	
2351.16	V	-62.73	-47.00	
3675.23	V	-67.67	-47.00	

DCS 1800 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
154.65	Horizontal	-70.97	-57.00	Pass
494.68	H	-60.77	-57.00	
1167.04	H	-74.43	-47.00	
2270.54	H	-69.72	-47.00	
3622.87	H	-61.75	-47.00	
DCS 1800 Band: Middle Channel, Normal condition				
Frequency (MHz)	Radiated Spurious Emission		Limit (dBm)	Test Result
	Polarization	Level(dBm)		
74.33	Vertical	-65.08	-57.00	Pass
474.31	V	-69.97	-57.00	
1939.07	V	-67.50	-47.00	
2186.19	V	-62.32	-47.00	
3419.48	V	-72.54	-47.00	

-----THE END OF REPORT-----

